

SYKES PUMPS

THE UK'S LEADING PUMP HIRE SPECIALIST



HIRE SALES SERVICE INSTALL

0800 211 611

sykes-pumps.com

GENERAL PURPOSE

GP50	12
MINIVAC ECO	14
GP80 ECO	16
GP80	18
RAPID RESPONSE	20
GP100M	22
GP100M Hatz	24
GP150M	26
GP150M Hatz	28

ELECTRIC

GP100E	32
GP150E	34
UV301M	36

SUPER SILENCED

SUPER WISPASET 80 ECO	40
SUPER WISPASET 100	42
SUPER WISPASET 150	44
SUPER WISPASET 200	46
SUPER WISPASET 200 ECOTEC	48
SUPER WISPASET 300	50
SUPER WISPASET GP300 ECO	52

HIGH PERFORMANCE

HP80	56
HP100	58
HP100 SUPER SILENCED	60
HP150 SUPER SILENCED	62
MHI50/100	64
MHI50/100 SUPER WISPASET	66
HS200	68
UVO 150/100E	70
UVO 150/100 SUPER WISPASET	72
UVO 200/150F (D70)	74

UVO 200/150F (D90)	76
UVO 200/150 (D90) SILENCED	78
DRC 150/150	80

BENTONITE

B150 BENTONITE PUMP	84
B150E BENTONITE PUMP	86

SUBMERSIBLE HYDRAULIC

H50 & HH50	90
H80	92
I00S	94
H100 & H150	96

SUBMERSIBLE DRAINAGE

LSC-4	100
P501	102
P601W	104
P701	106
P1001	108
P1501	110
P2001	112
P2002 N	114
P3001	116
P3002 N	118
PX12	120
PX22	122
PX30	124
SUBMERSIBLE OPTIONS	126

SYKES PUMPS 

sykes-pumps.com

or call us Free on **0800 211 611**

SUBMERSIBLE SLUDGE

JS750 SV	130
SP20	132
SP30	134
SP50	136
SP80	138

SUBMERSIBLE WASTEWATER

PIRANHA S21, M30 & M70	142
PIRANHA PET10	144
XFP80C CB1.2 & 1.3	146
AFPK0841	148
AFPK0832 & CS3102	150
AFPK 0842 & 0844	152
XFP80E CB1.3	154
AFPK1042	156
XFPI00E CB1.1 & 1.3	158
AFPK1043	160
AFPK1045	162
AFPK1048 & XFPI01G	164
AFPK1049 & AFPI049	166
XFPI00J CB2. 315 & 330	168
XFPI50G CB1.3	170
AFPK 1543	172
AFPK1552 & XFPI50M CB2.	174
XFPI50M CB2.450	176
AFPK1575	178
AFPK2045 & XFP200G	180
AFPK2073	182
CS3152-LT	184
XFP301M	186
GUIDE RAILS	188

CONTROL PANELS

Standard PLC Panels	192
Variable DOL Panel 1 - 15kW	194
Variable Soft Start Panel 18 - 56kW	196
Variable speed Drive Panel	198

AIR PUMPS

Beaver 50	202
Beaver 75	204

ACCESSORIES

Layflat Hose	208
Poly pipe	208
Galvanised Steel Pipe	210
Flexible Bauer Wire Armoured Suction Hose	210
High Pressure Wire Armoured Flanged NP16 Hose	212
Additional	212
Fuel Tanks	214
Settlement Tanks	216
Sykes Pump Silt Away	218
Road Ramps	218
Drip Trays	220
Venturi	220

INFORMATION

Flange Sizes	224
Approximate Discharge from pipes	226
Friction Loss	228
Centrifugal Pump Characteristics	230
Electrical Data	232
Conversion Factors	236
Pump Terminology	240
Packaged Pumping System	242
Sykes Pumps Repair & Service	244
Sykes Pumps Parts	244
Notes	246

WELCOME TO SYKES PUMPS

The past, present and future of pumping in the UK.

Established for over 160 years, Sykes is the UK's largest specialist hire company. Solutions focused, our industry experienced teams provide 24/7 planned and preventative pumping and specialist fluid moving, via a network of nationwide locations. Our unique structure enables us to reach any UK destination within four hours and our commitment to delivering the finest equipment, service and expertise is unrivalled within the industry.

Businesses rely on us whether safeguarding against equipment failure, which can have a detrimental impact on people and service, or providing the right conditions to ensure maximum productivity.

From straight forward hire services to full solution provision including design, planning, project management, installation and running of complex temporary and permanent solutions. We can provide an extensive range of diesel, electric, submersible, hydraulic and air pumps to withstand the toughest applications and the most demanding environments.


With an impressive and varied client portfolio, our ability to provide a competitive and engineered solution for every pumping requirement, coupled with bespoke, flexible contract terms to suit, provides ultimate peace of mind and makes us the preferred choice when it comes to business critical equipment hire.

We look forward to working with you.

Regards,

Carl Webb

Carl Webb
Managing Director - Sykes Pumps



SYKES PUMPS 

sykes-pumps.com

or call us Free on **0800 211 611**

AN UNBEATABLE RANGE

.....

We provide pumps for virtually every conceivable need and application. This guide should provide all the information you need to select the right unit for you, including detailed technical data.

- General Purpose
- Electric
- Super Silenced
- High Performance
- Bentonite
- Silenced

- Submersible Hydraulic
- Submersible Drainage
- Submersible Sludge
- Submersible Wastewater
- Air Pumps

For Groundwater Control Services, our in-house expertise includes specialist de-watering advice and feasibility studies, proven people and equipment, installation and removal, and backup from our depots UK-wide.

We provide a similar end-to-end approach for offshore projects including float-outs.

You also have access to an unbeatable range of accessories that includes high performance hoses, pipes and tubing, Bauer, flanged and NP16 fittings, plus cost-effective fuel supplies nationwide.

Sykes Pumps are proud to invest in the latest technologies and strive to improve our ever growing range of pumps and accessories. We encourage you to visit our website sykes-pumps.com as we regularly add new products and update our technical specifications.



SYKES PUMPS 

sykes-pumps.com


or call us Free on **0800 211 611**

THE SYKES CHARTER

Our mission is to be a world-class pump hire and pumping services company, helping our customers to address the real-life challenges they face - whether planned or emergency - in the fastest, most expert, professional and cost effective ways. We want to help our customers pump more and pay less.

For our extensive range of standard pumps, our commitments are:

1. We will respond to any breakdown within 4 hours of being notified.
2. We will have pumps available 24 hours a day 7 days a week.
3. In the unlikely event that we are unable to repair a pump within 2 hours of attending a breakdown then that pump will be changed over within 4 hours.
4. Any standard pump ordered before 12.00 midday on a normal working day will be delivered the same day (if required).
5. Free of charge site surveys will be carried out within 24 hours of a request being received.
6. All diesel pumps on hire will be inspected at 28-day intervals and serviced when necessary.
7. Any pump that is off hired will be collected within 48 hours of the off hire notice being received.
8. Any account queries will be resolved within 14 working days.
9. All pump telephone enquiries will be answered within 5 rings of the telephone.



SYKES PUMPS 

sykes-pumps.com

or call us Free on **0800 211 611**

GENERAL PURPOSE


Sykes' general purpose GP Range has long been considered the industry standard for Contractors, Water Companies and Utilities. The Sykes Univac range has evolved over many years and is specifically designed for arduous duties and applications.

Maximum performance and reliability is achieved by incorporating tried and tested components, resulting in the GP Range becoming the market leader in 50mm - 300mm heavy duty pumps.

Used wherever there is a need for automatic self-priming, the GP Range incorporates the unique Sykes Univac vacuum system, enabling the pump to prime and re-prime automatically from dry and operate with the suction intake intermittently exposed to the atmosphere.

GP pumps are available with alternative prime movers and mountings, together with a wide choice of accessories and fittings for all kinds of applications. Robust 4 wheeled site chassis ensure pumps can be moved and positioned easily.



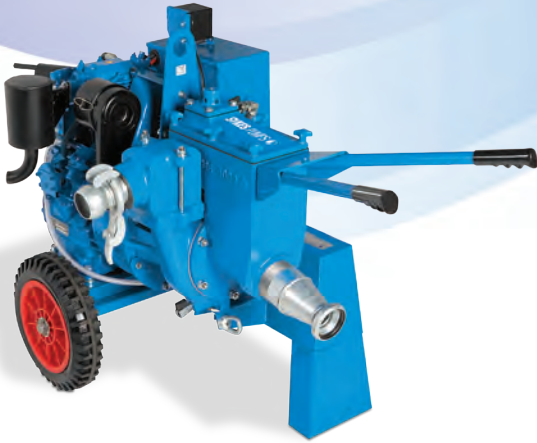

PUMP PERFORMANCE

Performance:

Max head: 28 m

Max flow: 15 l/s

Max solid: 28 mm

Weight:

200 kg with fuel

188 kg without fuel

Dimensions: (L x W x H) mm

1216 x 750 x 860

Noise level:

@ 1m = 90 - 97 dBA

@ 7m = 73 - 80 dBA

Fuel tank capacity:

14 litres. Max 24 hours
with cleaning and flushing facilities

Pipe connections:

Suction: 3" BSP Female thread

Discharge: 2" BSP Female thread

Bauer couplings option 2"


Fuel consumption:

Full load @ 2500 rpm:
1.4 litres/hour

Energy Efficient duty point:

**Fuel Consumption @ 1500 rpm:
0.58 litres/hour**

Smart pumping
Best fuel economy 0.58 litres/hour

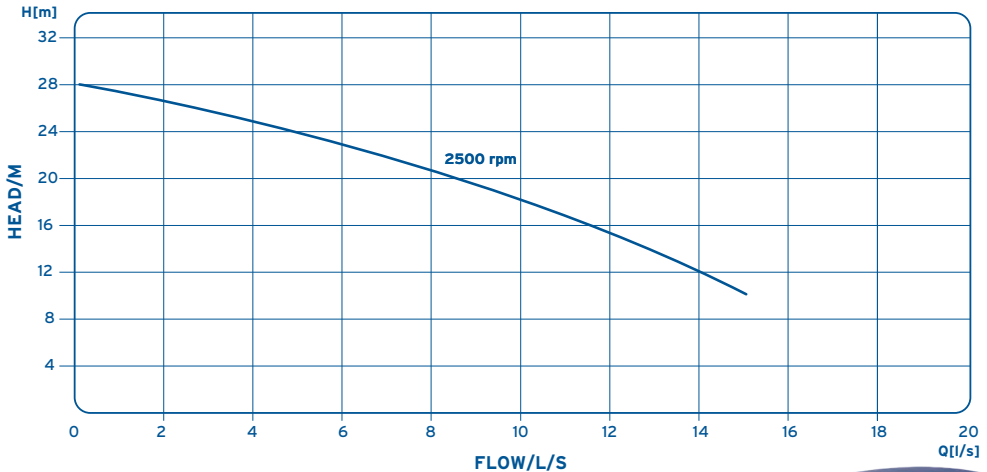

SYKES PUMPS

sykes-pumps.com

or call us Free on **0800 211 611**

**GENERAL
PURPOSE**

GP50


12

PUMP PERFORMANCE

Performance:	Max head: 28 m
	Max flow: 15 l/s
	Max solid: 28 mm
Weight:	180 kg with fuel
	168 kg without fuel
Dimensions: (L x W x H) mm	1350 x 600 x 840
Noise level:	@ 7m = 70 - 77 dBA
Fuel tank capacity:	5 litres. Max 8 hours
	separate 24 hour fuel tank available
Pipe connections:	Suction: 3" BSP Female thread
	Discharge: 2" BSP Female thread
	Bauer couplings option 2" or 3"
Fuel consumption:	Full load @ 2000 rpm:
	0.71 litres/hour
Energy Efficient duty point:	Fuel Consumption @ 2000 rpm:
	0.58 litres/hour



Smart pumping
Best fuel economy 0.58 litres/hour

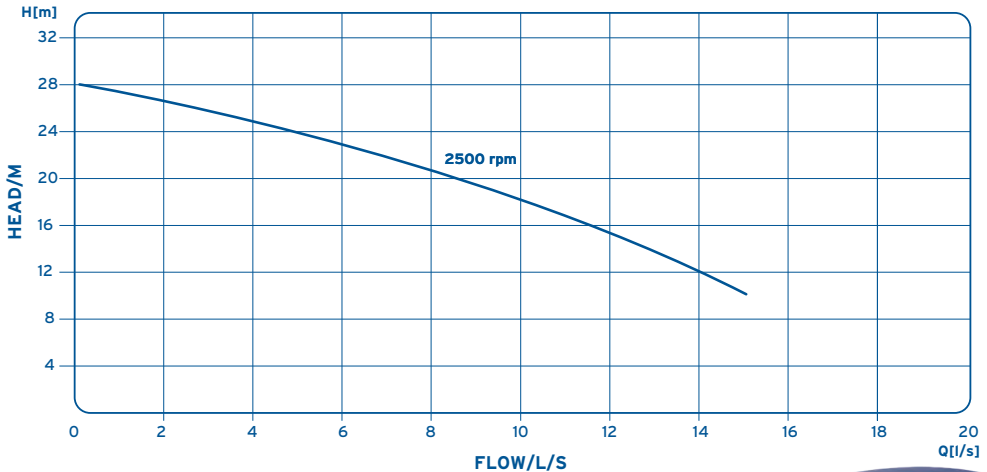

SYKES PUMPS 

sykes-pumps.com

or call us Free on **0800 211 611**

**GENERAL
PURPOSE**

MINIVAC ECO

GP80 ECO

PUMP PERFORMANCE

Performance: Max head: 24 m
Max flow: 36 l/s
Max solid: 40 mm

Weight: 559 kg with fuel
525 kg without fuel

Dimensions: (L x W x H) mm
2310 x 1470 x 1450

Noise level: @ 1m = 81 dBA
@ 7m = 72 dBA

Fuel tank capacity: 35 litres


Pipe connections: Suction: 4" table D
Discharge: 4" table D
Bauer couplings option: 3"

Fuel consumption: Full load @ 1800 rpm:
1.99 litres/hour

Energy Efficient duty point: **Fuel Consumption @ 1500 rpm:**
1.4 litres/hour



Smart pumping
Best fuel economy 1.4 litres/hour

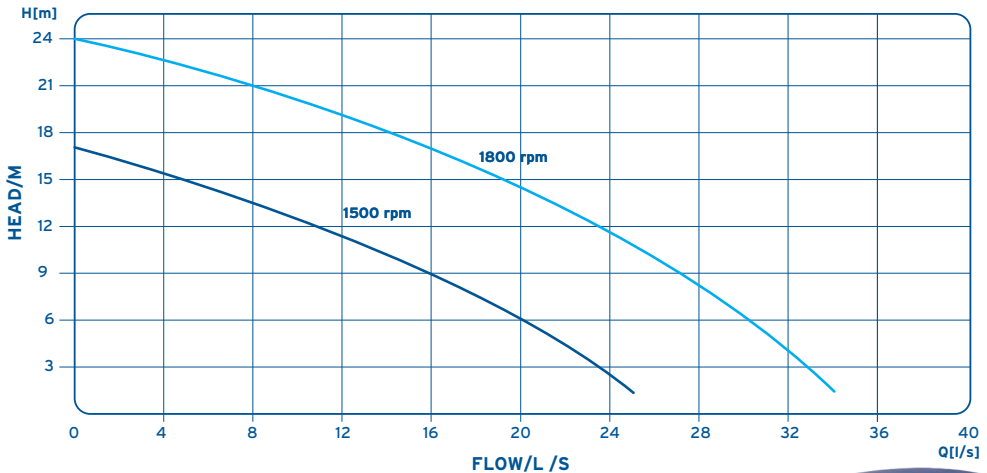

SYKES PUMPS 

sykes-pumps.com

or call us Free on **0800 211 611**

**GENERAL
PURPOSE**

GP80 ECO

16



Smart pumping
Best fuel economy 0.61 litres/hour



PUMP PERFORMANCE

Performance:

Max head: 24 m
Max flow: 34 l/s
Max solid: 40 mm

Weight:

455 kg with fuel
425 kg without fuel

Dimensions: (L x W x H) mm

1700 x 1190 x 1093

Noise level:

@ 1m = 95-98 dBA
@ 7m = 78 - 82 dBA

Fuel tank capacity:

35 litres. Max 24 hours
with cleaning and flushing facilities

Pipe connections:


Suction: 4" table D
Discharge: 4" table D
Bauer couplings option: 3"

Fuel consumption:

Full load @ 1800 rpm:
1.9 litres/hour

Energy Efficient duty point:

**Fuel Consumption @ 1500 rpm:
0.61 litres/hour**

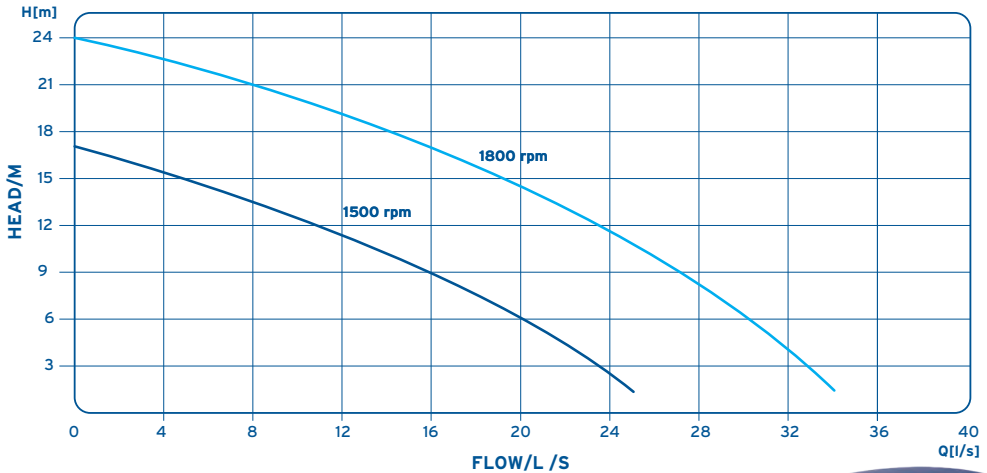

SYKES PUMPS 

sykes-pumps.com

or call us Free on **0800 211 611**

**GENERAL
PURPOSE**

GP80

18



Smart pumping
 Best fuel economy 1.4 litres/hour



PUMP PERFORMANCE

Performance: Max head: 24 m
 Max flow: 36 l/s
 Max solid: 40 mm

Weight: 626 kg with fuel
 590 kg without fuel

Dimensions: 2775 x 1650 x 1500
 (L x W x H) mm

Noise level: @ 1m = 81 dBA
 @ 7m = 72 dBA


Fuel tank capacity: 35 litres

Pipe connections: Suction: 4" table D
 Discharge: 4" table D
 Bauer couplings option: 3" or 4"

Fuel consumption: Full load @ 1800 rpm:
 1.99 litres/hour

Energy Efficient duty point: **Fuel Consumption @ 1500 rpm:**
 1.4 litres/hour

Road towable pump

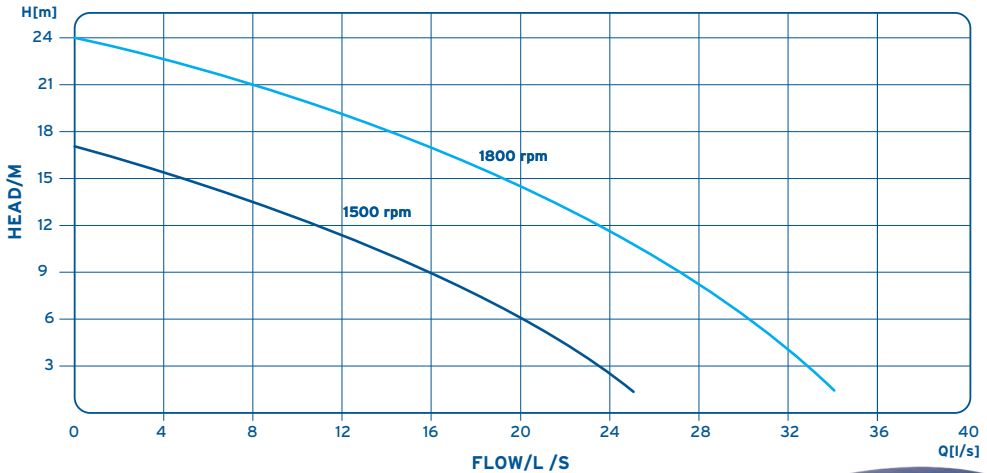

PUMP PERFORMANCE

Performance:

Max head: 31 m

Max flow: 45 l/s

Max solid: 44 mm

Weight:

1011 kg with fuel

907 kg without fuel

Dimensions:

(L x W x H) mm

1940 x 1450 x 1500

Typical length including tow bar 2620

Noise level:

@ 1m = 94 - 98 dBA

@ 7m = 77 - 82 dBA

Fuel tank capacity:

69 - 122 litres. Max 24 hours with cleaning and flushing facilities

Pipe connections:

Suction: 4" table D

Discharge: 4" table D

Bauer couplings option: 4"

Fuel consumption:


Full load @ 1800 rpm:
3.7 litres/hour

Energy Efficient duty point:

**Fuel Consumption @ 1500 rpm:
2.29 litres/hour**



Smart pumping
Best fuel economy 2.29 litres/hour

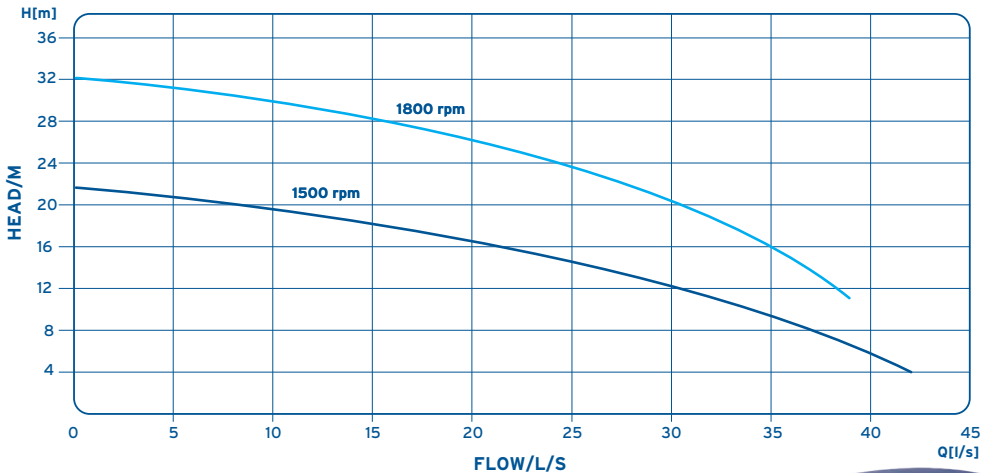

SYKES PUMPS 

sykes-pumps.com

or call us Free on **0800 211 611**

**GENERAL
PURPOSE**

GP100M



Smart pumping
Best fuel economy 2.26 litres/hour



PUMP PERFORMANCE

Performance:

Max head: 31 m

Max flow: 45 l/s

Max solid: 44 mm

Weight:

1103 kg with fuel

998 kg without fuel

Dimensions:

(L x W x H) mm

1940 x 1450 x 1500

Typical length including tow bar 2620

Noise level:

@ 1m = 90 - 94 dBA

@ 7m = 73 - 77 dBA

Fuel tank capacity:

69 - 122 litres. Max 24 hour
with cleaning and flushing facilities

Pipe connections:

Suction: 4" table D

Discharge: 4" table D


Bauer couplings option: 4"

Fuel consumption:

Full load @ 1800 rpm:
4.5 litres/hour

Energy Efficient duty point:

Fuel Consumption @ 1500 rpm:
2.26 litres/hour

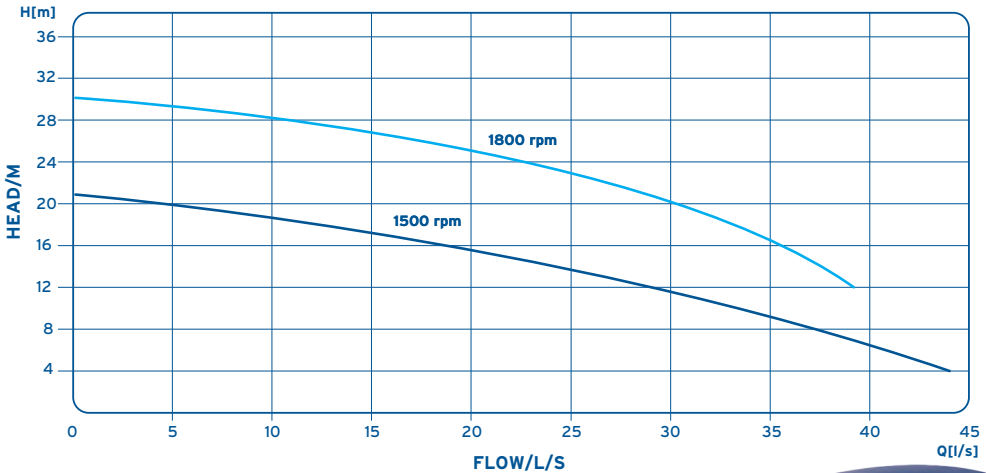

SYKES PUMPS 

sykes-pumps.com

or call us Free on **0800 211 611**

**GENERAL
PURPOSE**

GP100M Hatz

24




Smart pumping
Best fuel economy 4.08 litres/hour



PUMP PERFORMANCE

Performance:	Max head: 38 m
	Max flow: 90 l/s
	Max solid: 52 mm
Weight:	1238 kg with fuel
	1133 kg without fuel
Dimensions: (L x W x H) mm	2100 x 1500 x 1635
	Typical length including tow bar 2780
Noise level:	@ 1m = 94 - 98 dBA
	@ 7m = 77 - 82 dBA
Fuel tank capacity:	122 litres. Max 24 hours with cleaning and flushing facilities
Pipe connections:	Suction: 6" table D
	Discharge: 6" table D
	Bauer couplings option: 6"
Fuel consumption:	Full load @ 1800 rpm: 6.27 litres/hour
Energy Efficient duty point:	Fuel Consumption @ 1500 rpm: 4.08 litres/hour

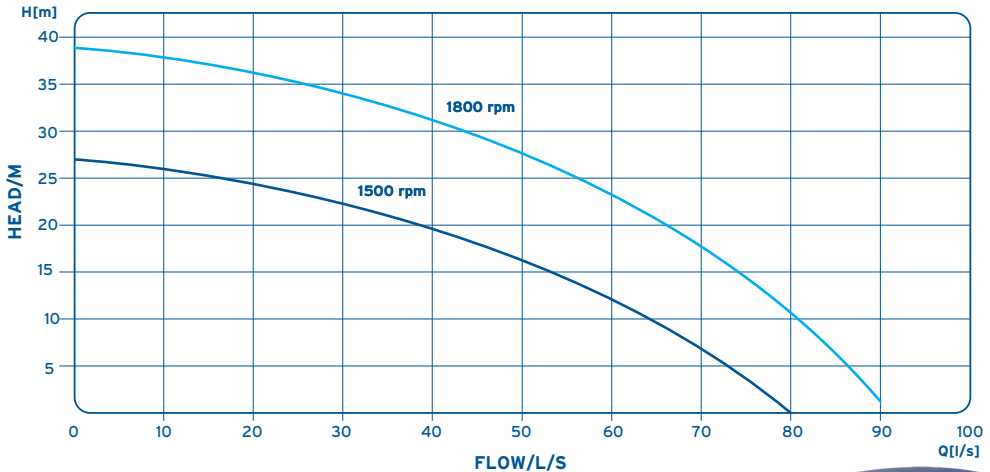

SYKES PUMPS 

sykes-pumps.com

or call us Free on **0800 211 611**

**GENERAL
PURPOSE**

GP150M

26



Smart pumping
Best fuel economy 3.98 litres/hour



PUMP PERFORMANCE

Performance:

Max head: 38 m

Max flow: 90 l/s

Max solid: 52 mm

Weight:

1430 kg with fuel

1325 kg without fuel

Dimensions:

(L x W x H) mm

2100 x 1500 x 1635

Typical length including tow bar 2780

Noise level:

@ 1m = 90 - 94 dBA

@ 7m = 73 - 77 dBA

Fuel tank capacity:

122 litres. Max 24 hours
with cleaning and flushing facilities

Pipe connections:

Suction: 6" table D

Discharge: 6" table D


Bauer couplings option: 6"

Fuel consumption:

Full load @ 1800 rpm:
6 litres/hour

Energy Efficient duty point:

Fuel Consumption @ 1500 rpm:
3.98 litres/hour

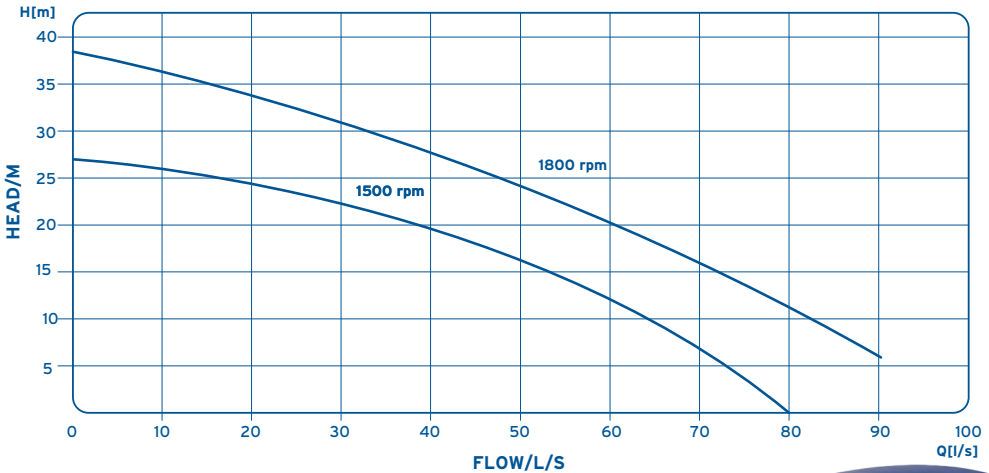

SYKES PUMPS 

sykes-pumps.com

or call us Free on **0800 211 611**

**GENERAL
PURPOSE**

GP150M Hatz

SURFACE MOUNTED ELECTRIC

Sykes' general purpose GP Range has long been considered the ideal choice for contractors, water companies and utilities. The Sykes Univac range has evolved over many years and is specifically designed to excel in a wide range of duties and applications for all market sectors.

Maximum performance and reliability are achieved through incorporating tried and tested quality components, which has resulted in these pumps becoming the industry standard in many countries around the world. In addition to the diesel driven units, there is now a growing demand for electric driven pumps. These are quiet in operation and can have their running speed controlled to save on energy costs.

Sykes has added new 100mm and 150mm electric motor GP versions to the extensive UK hire fleet. These come with a wide choice of accessories and fittings for all kind of applications. The pumps come on a robust skid-base chassis with lifting points and can be easily moved and positioned into place. Used wherever there is a need for automatic self-priming, these pumps feature the unique Univac vacuum system, enabling the pump to prime and re-prime automatically from dry.

For solids handling applications and bigger flows, Sykes offers the UV301M pump. This compact 300mm electric pumpset features automatic self-priming and is popular with water companies, contractors and utilities. These pumps come with a separate non-return valve and are commonly used with a variable speed drive panel.


Additionally please see our electric bentonite pump the B150E on page 86.






PUMP PERFORMANCE


Performance:	Max head: 21 m
	Max flow: 42 l/s
	Max solid: 44 mm
Weight:	720 kg
Dimensions: (L x W x H) mm	1546 x 850 x 1135
Noise level:	@ 7m = 68 dBA
Pipe connections:	Suction: 4" table D
	Discharge: 4" table D
	Bauer couplings option 4"
Motor:	15kW IE3 motor
	415v 3ph 50 Hz

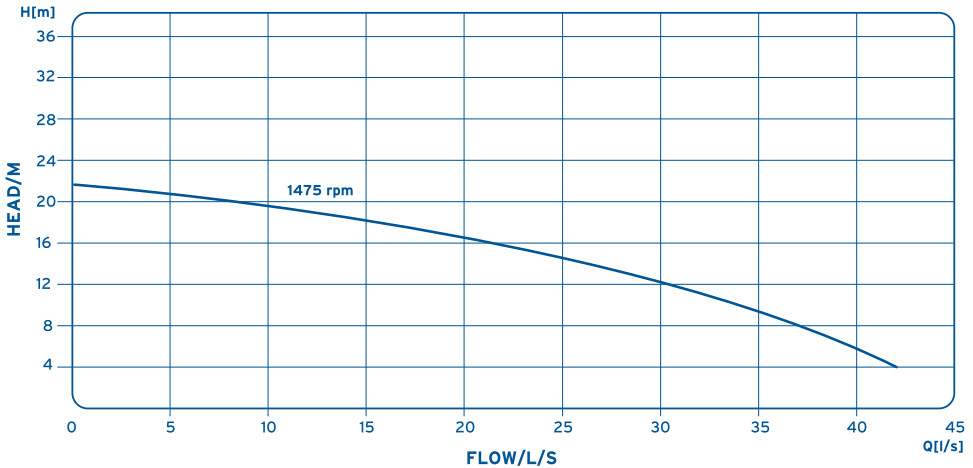

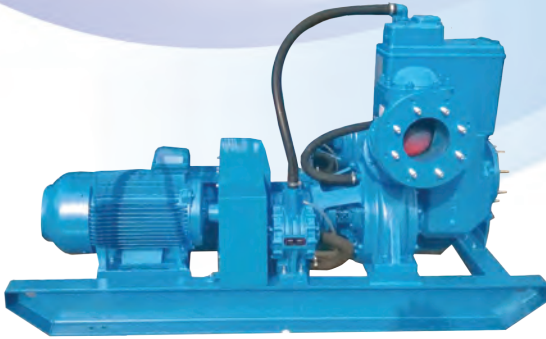

PUMP PERFORMANCE

Performance:	Max head: 27 m
	Max flow: 80 l/s
	Max solid: 52 mm
Weight:	843 kg
Dimensions: (L x W x H) mm	2096 x 850 x 1285
Noise level:	@ 7m = 68 dBA
Pipe connections:	Suction: 6" table D
	Discharge: 6" table D
	Bauer couplings option 6"
Motor:	22kW IE3 motor
	415v 3ph 50 Hz

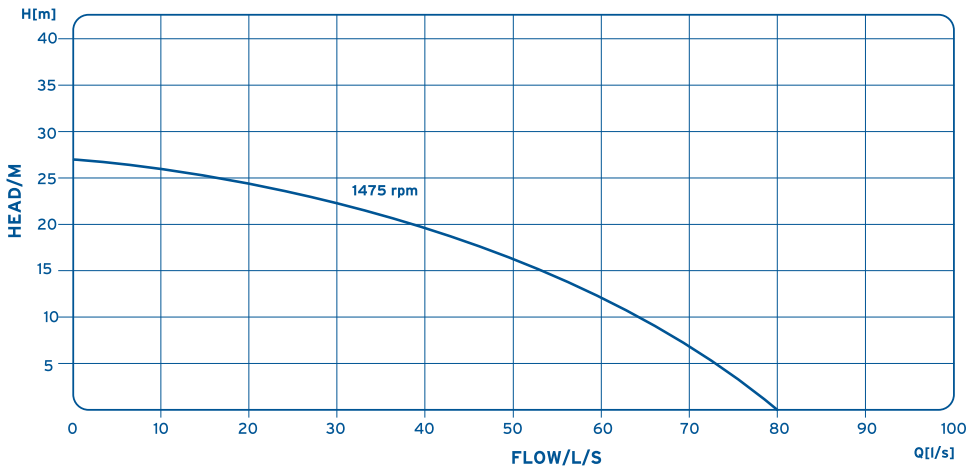

UV301M




PUMP PERFORMANCE

Model:	UV301M	60CFM VP
Motor type (V):	415	415
	(3-Phase)	(3-Phase)
	50Hz	50Hz
Motor rating (Kw):	75	2.2
Running current: (Amps)	140	4.58
Running speed:	980 rpm	1450 rpm
Discharge port (mm):	300	
Suction inlet port (mm):	300	
Maximum solids (mm):	127 x 110	
EX Rated:	Yes	
Cooling jacket:	Yes	

Model:	Dimensions mm: (L x W x H)	Weight:
UV301M	2410 x 1100 x 1800	1842 kg
C/W fittings	2920 x 1620 x 1800	1920 kg
NRV	920 x 920 x 980	386 kg
C/W fittings	1768 x 920 x 980	464 kg
75kW VSD	500 x 100 x 2000	300 kg

Please see the pump accessory section

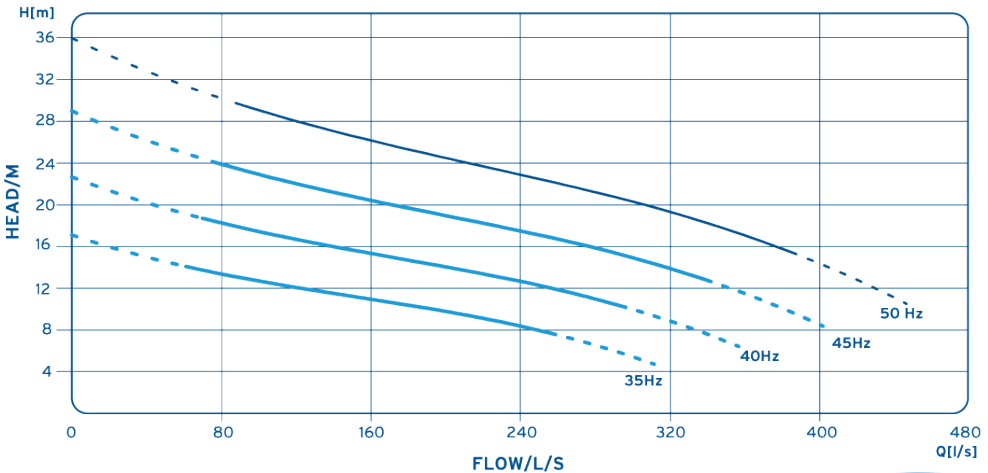

SYKES PUMPS 

sykes-pumps.com

or call us Free on **0800 211 611**

ELECTRIC

UV301M

36

SUPER SILENCED



Our superb range of super silenced pumps raises the bar in low-noise pumping without compromising on power, reliability and flexibility. They set the benchmark against which other pumps are measured, with noise levels down to an average 58 dBA at 7m.

Telemetry can be added for remote pump operation and monitoring. This innovative remote management system can reduce costs associated with regular visits from engineers, as any problems are picked up immediately, often before users are aware, and remedial action taken.

Technically excellent, these portable super silenced pumps have been developed with a clear focus on environmental issues such as sound attenuation, the eradication of fuel spillage, improved fuel economy and reduced emissions from using highly efficient engines.

The popularity of these pumps means we stock the largest range of 100mm - 300mm super silenced pumps available for hire in the UK. These pumps are available 24/7 from our National Depot Network, so can be delivered quickly to where they are required.

SUPER WISPASET 80 ECO



Smart pumping
Best fuel economy 1.4 litres/hour



PUMP PERFORMANCE

Performance:

Max head: 24 m

Max flow: 36 l/s

Max solid: 40 mm

Weight:

890 kg with fuel

856 kg without fuel

Dimensions:

(L x W x H) mm

1800 x 1100 x 1400

Noise level:

@ 1m = 72 dBA

@ 7m = 64 dBA

Fuel tank capacity:

35 litres. Max 24 hours

Pipe connections:

Suction: 4" Table D

Discharge: 4" Table D

Bauer couplings option: 3" or 4"

Fuel consumption:


Full load @ 1800 rpm:

1.99 litres/hour

Energy Efficient duty point:

Fuel Consumption

@ 1500 rpm: 1.4 litres/hour

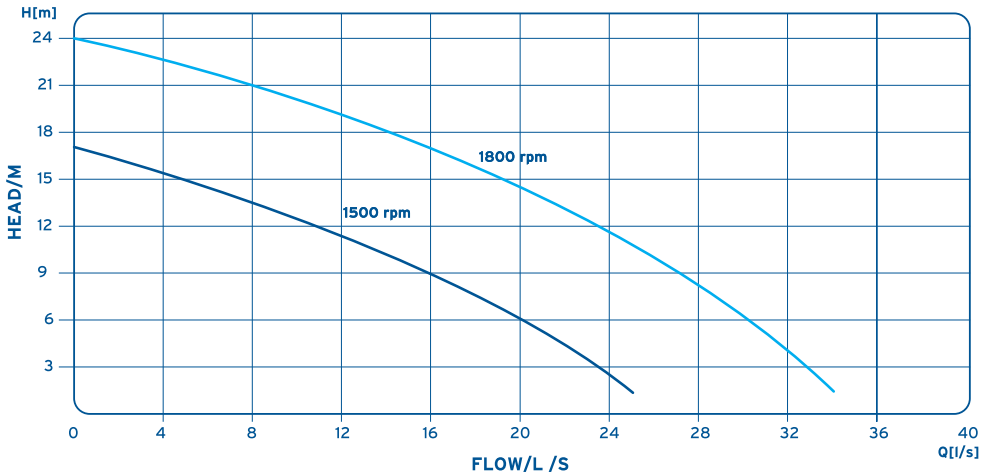

SYKES PUMPS 

sykes-pumps.com

or call us Free on **0800 211 611**

**SUPER
SILENCED**

SUPER
WISPASET 80 ECO

40

SUPER WISPASET 100

PUMP PERFORMANCE



Smart pumping
Best fuel economy 2.25 litres/hour



Performance:

Max head: 31 m

Max flow: 45 l/s

Max solid: 44 mm

Weight:

1685 kg with fuel

1500 kg without fuel

Dimensions:

(L x W x H) mm

2137 x 1250 x 1535

Noise level:

@ 7m = 58 - 65 dBA

Fuel tank capacity:

158 litres. Max 24 hours

Pipe connections:

Suction: 4" Table D

Discharge: 4" Table D

Bauer couplings option


Fuel consumption:

Full load @ 1800 rpm:

5 litres/hour

Energy Efficient
duty point:

Fuel Consumption @ 1500 rpm:
2.25 litres/hour

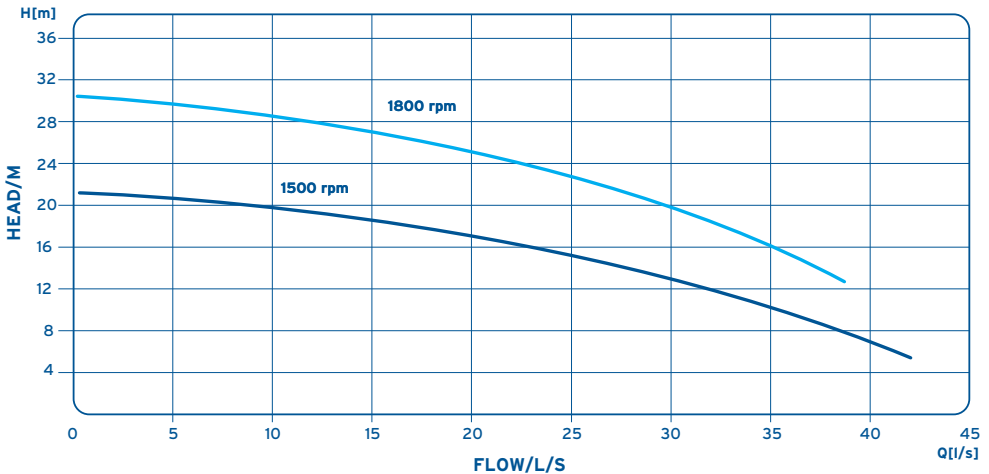

SYKES PUMPS 

sykes-pumps.com

or call us Free on **0800 211 611**

**SUPER
SILENCED**

SUPER
WISPASET 100

42

SUPER WISPASET 150

PUMP PERFORMANCE



Smart pumping
Best fuel economy 4.1 litres/hour



Performance:

Max head: 38 m

Max flow: 90 l/s

Max solid: 52 mm

Weight:

1990 kg with fuel

1800 kg without fuel

Dimensions:

(L x W x H) mm

2310 x 1250 x 1535

Noise level:

@ 7m = 65 dBA

Fuel tank capacity:

175 litres. Max 24 hours

Pipe connections:

Suction: 6" Table D

Discharge: 6" Table D

Bauer couplings option


Fuel consumption:

Full load @ 1800 rpm:

9.8 litres/hour

Energy Efficient duty point:

**Fuel Consumption @ 1500 rpm:
4.1 litres/hour**

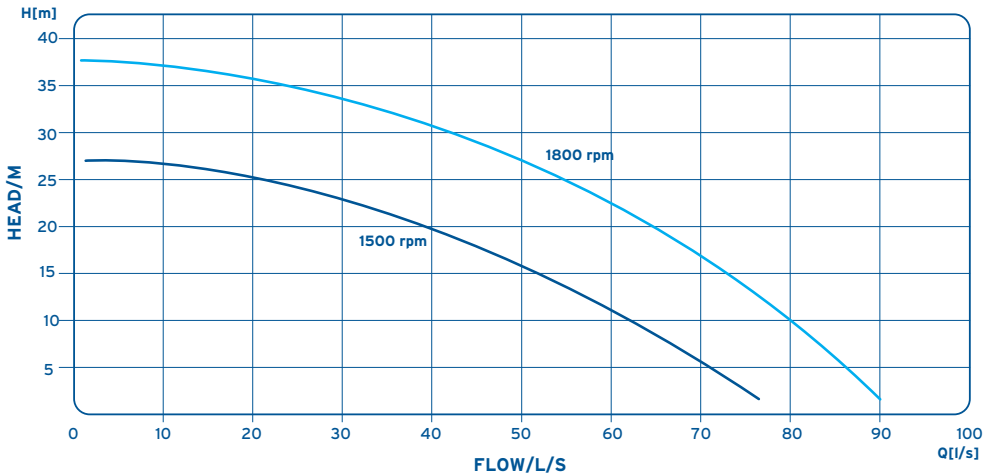

SYKES PUMPS 

sykes-pumps.com

or call us Free on **0800 211 611**

**SUPER
SILENCED**

SUPER
WISPASET 150

44

SUPER WISPASET 200

PUMP PERFORMANCE



Smart pumping
Best fuel economy 7.3 litres/hour



Performance:

Max head: 43 m

Max flow: 161 l/s

Max solid: 75 mm

Weight:

2390 kg with fuel

2200 kg without fuel

Dimensions: (L x W x H) mm

2610 x 1250 x 1535

Noise level:

@ 7m = 65 dBA

Fuel tank capacity:

207 litres. Max 24 hours

Pipe connections:

Suction: 8" Table D

Discharge: 8" Table D

Bauer couplings option


Fuel consumption:

Full load @ 1800 rpm:

17 litres/hour

Energy Efficient duty point:

Fuel Consumption @ 1500 rpm:
7.3 litres/hour

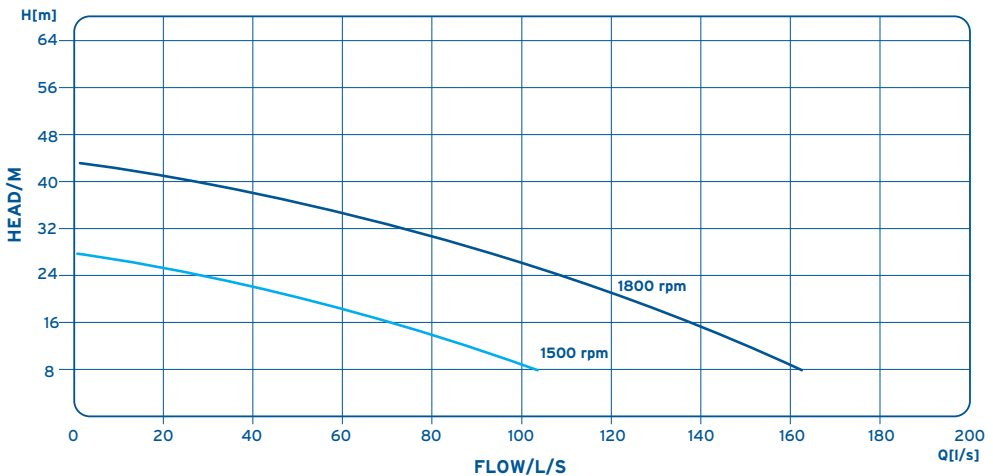

SYKES PUMPS 

sykes-pumps.com

or call us Free on **0800 211 611**

**SUPER
SILENCED**

SUPER
WISPASET 200

46

SUPER WISPASET 200 ECOTEC

PUMP PERFORMANCE

Performance: Max head: 43 m
Max flow: 161 l/s
Max solid: 75 mm

Weight: 2426 kg with fuel
2314 kg without fuel

Dimensions: (L x W x H) mm
2720 x 1250 x 1790

Noise level: @ 7m = 65 dBA


Fuel tank capacity: 170 litres. Max 24 hours

Pipe connections: Suction: 8" Table D
Discharge: 8" Table D
Bauer couplings option

Fuel consumption: Full load @ 1800 rpm:
15 litres/hour

Energy Efficient duty point: **Fuel Consumption @ 1500 rpm:**
7 litres/hour

Smart pumping
Best fuel economy 7 litres/hour

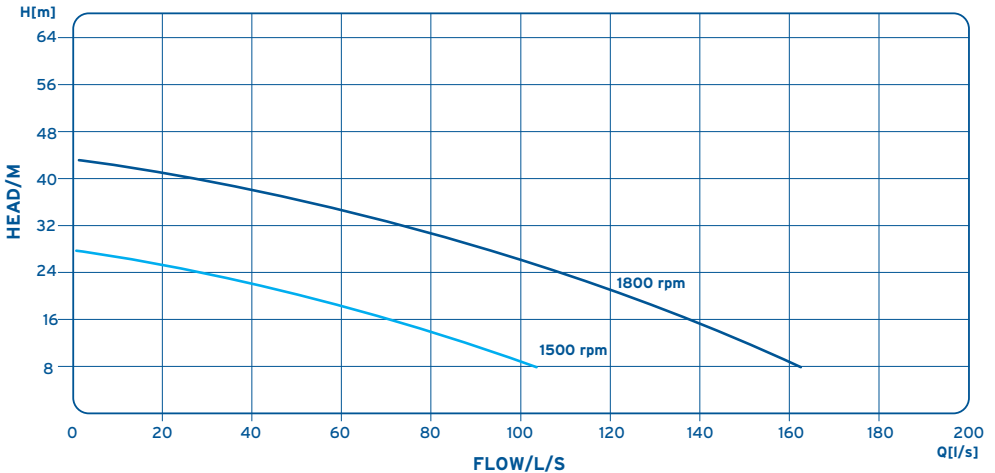

SYKES PUMPS 

sykes-pumps.com

or call us Free on **0800 211 611**

**SUPER
SILENCED**

SUPER WISPASET
200 ECOTEC

48

SUPER WISPASET 300

PUMP PERFORMANCE



Smart pumping
Best fuel economy 13.6 litres/hour



Performance:

Max head: 18 m

Max flow: 415 l/s

Max solid: 70 mm

Weight:

3913 kg with fuel

3500 kg without fuel

Dimensions:

(L x W x H) mm

3300 x 1180 x 2700

Noise level:

@10m = 66 dBA

Fuel tank capacity:

480 litres. Max 24 hours

Pipe connections:

Suction flange: 12" DN 300 PN 10

Discharge flange: 12" DN 300 PN 10

Optional Bauer Couplings


Fuel consumption:

Full load @ 1800 rpm:

14.9 litres/hour

**Energy Efficient
duty point:**

**Fuel Consumption @ 1500 rpm:
13.6 litres/hour**

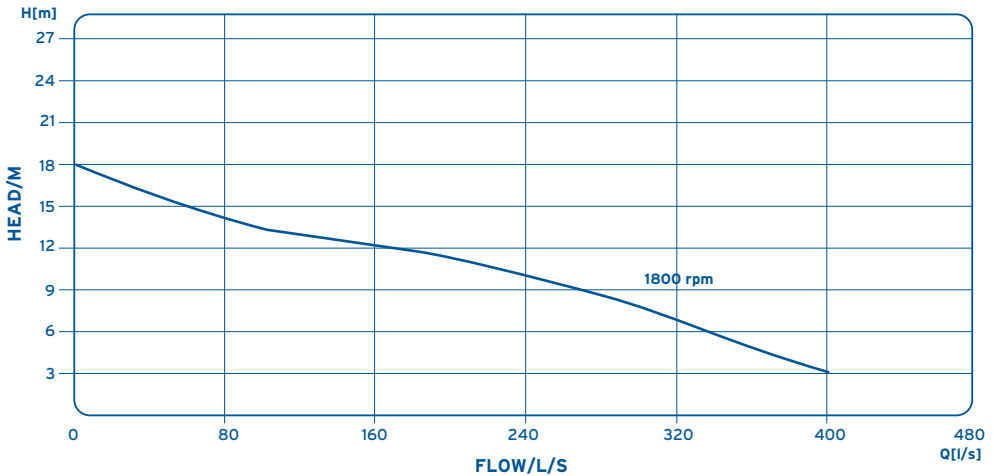

SYKES PUMPS 

sykes-pumps.com

or call us Free on **0800 211 611**

**SUPER
SILENCED**


SUPER
WISPASET 300

50

SUPER WISPASET GP300 ECO



Our new Super Wispaset GP300 eco will be launched early in 2021. Please visit our website for further information on this new product, along with our other new product developments.

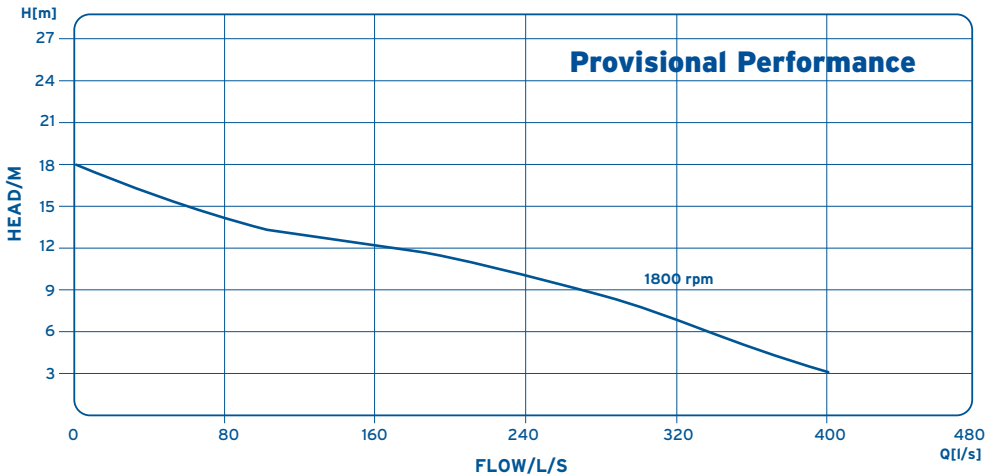

SYKES PUMPS 

sykes-pumps.com

or call us Free on **0800 211 611**

**SUPER
SILENCED**

SUPER WISPASET
GP300 ECO

52

HIGH PERFORMANCE

Specifically designed for medium and high head duties, Sykes Pumps offer a unique combination of features that provide high performance, improved efficiency and reliability.

The MH, UVO, DRC and HP medium and high head high performance pumps are suitable for specific heavy duty and high lift applications.

Pumps are built with enhanced specifications, using proven hard wearing and corrosion resistant parts robustly designed to deliver reliable, sustained performance at the lowest possible cost.

These high performance pumps are ideal for civil engineering, mines and quarries, process industries, municipal engineering, pressure boosting, abrasive slurries, irrigation and many more applications.. All pumps feature fully automatic self-priming as standard and come in sizes of 80mm - 200mm.


For specialist high performance pumps we always recommend that a free of charge survey from one of our professional sales engineers be completed prior to use, to ensure that the correct unit is selected for your application.



PUMP PERFORMANCE

Performance:	Max head: 90 m
	Max flow: 21 l/s
Weight:	856kg without fuel
Dimensions: (L x W x H) mm	1800 x 1070 x 1460 Typical length including tow bar 2400
Noise level:	@ 1m = 94 - 98 dBA @ 7m = 77 - 82 dBA
Fuel tank capacity:	90 litres
Pipe connections:	Suction: 4" Table D or 3" Bauer Discharge: 2 1/2" Instantaneous adapter or 3" BSP
Fuel consumption:	Full load @ 2800 rpm: 6.27 litres/hour
Energy Efficient duty point:	Fuel Consumption @ 2500 rpm: 4.08 litres/hour

Smart pumping
Best fuel economy 4.08 litres/hour

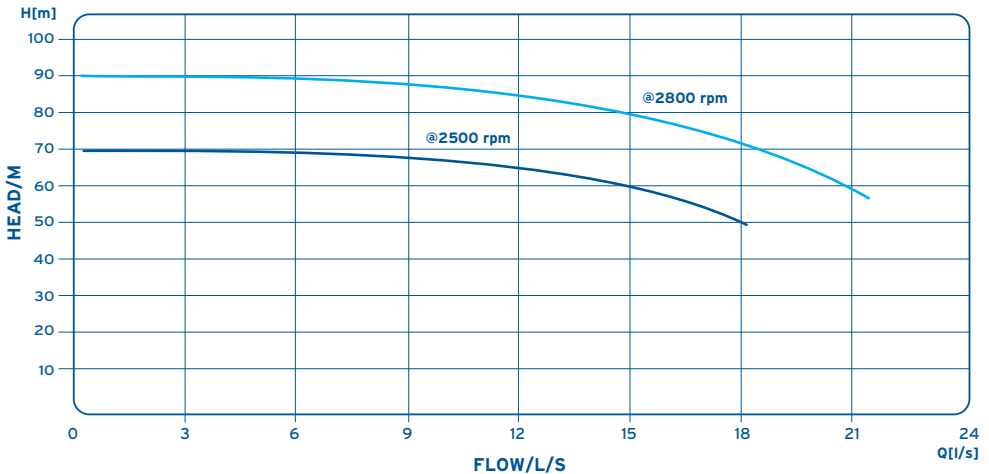




PUMP PERFORMANCE

Performance:	Max head: 90 m
	Max flow: 44 l/s
Weight:	1004 kg with fuel
	907 kg without fuel
Dimensions: (L x W x H) mm	1940 x 1450 x 1530
	Typical length including tow bar 2620
Noise level:	@ 7m = 77 - 82 dBA
Fuel tank capacity:	122 litres
Pipe connections:	Suction: 4" Table D or 4" Bauer
	Discharge: 2½" Instantaneous adapter or (3" Bsp)
Fuel consumption:	Full load @ 2800 rpm: 10.8 litres/hour
Energy Efficient duty point:	Fuel Consumption @ 2500 rpm: 7.7 litres/hour
Silenced version available	

Smart pumping
Best fuel economy 7.7 litres/hour

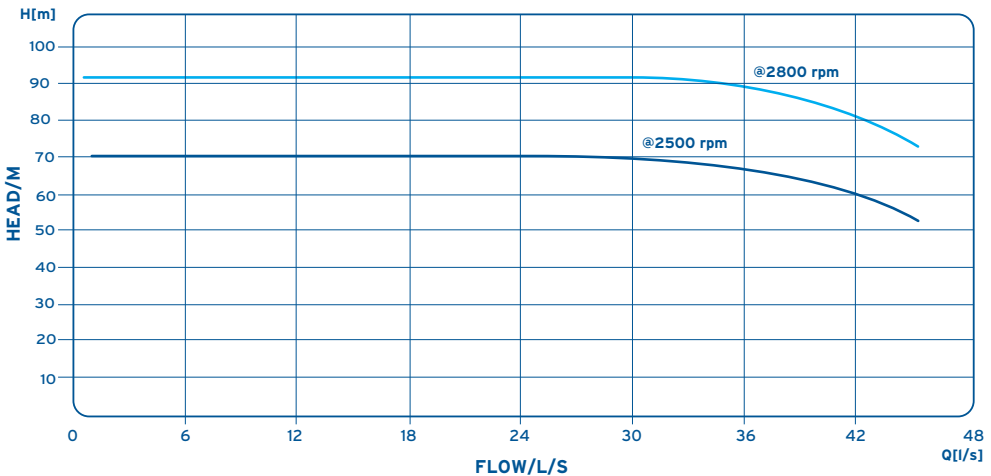

SYKES PUMPS 

sykes-pumps.com

or call us Free on **0800 211 611**

**HIGH
PERFORMANCE**

HP100

58


HP100 SUPER SILENCED



PUMP PERFORMANCE

Performance:	Max head: 90 m
	Max flow: 44 l/s
Weight:	1621 kg with fuel
	1504 kg without fuel
Dimensions: (L x W x H) mm	2375 x 1450 x 1600
Noise level:	@ 7m = 65 dBA
Fuel tank capacity:	155 litres
Pipe connections:	Suction: 4" Table D or 4" Bauer
	Discharge: Flanged 4" NP 16
Fuel consumption:	Full load @ 2800 rpm: 9 litres/hour
	Energy Efficient duty point: Fuel Consumption @ 2500 rpm: 6.2 litres/hour

Smart pumping
Best fuel economy 6.2 litres/hour

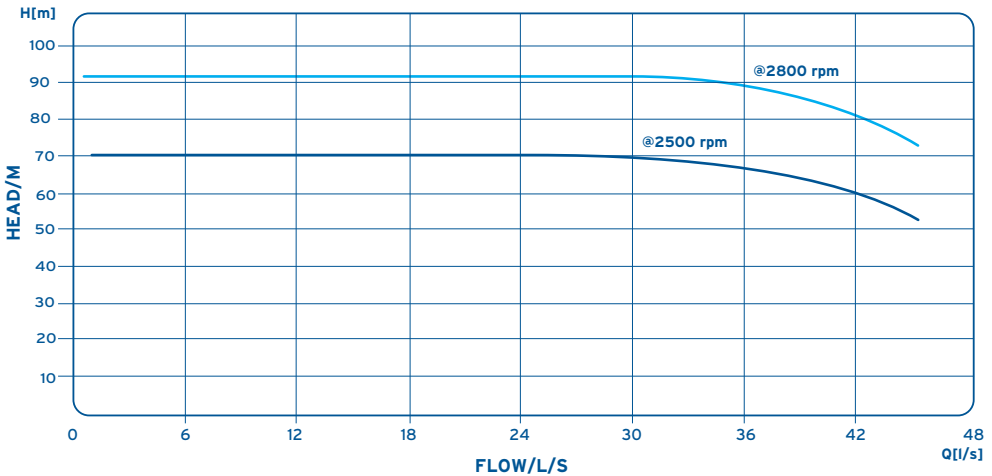

SYKES PUMPS 

sykes-pumps.com

or call us Free on **0800 211 611**

**HIGH
PERFORMANCE**

HP100 SUPER
SILENCED

60

HP150 SUPER SILENCED

PUMP PERFORMANCE

Performance:

Max head: 90 m

Max flow: 100 l/s

Max solid: 20 mm

Weight:

2426 kg with fuel

2314 kg without fuel

Dimensions:

(L x W x H) mm

2720 x 1250 x 1790

Noise level:

@ 7m = 65 dBA / 90 Lwa

Fuel tank capacity:

170 litres. Max 24 hours

Pipe connections:

Suction: 6" Table D

Bauer couplings option

Discharge: 4" NP16 Flanged

Fuel consumption:


Full load @ 2200 rpm:

22 litres/hour

**Energy Efficient
duty point:**

**Fuel Consumption @ 2000 rpm:
14 litres/hour**

Smart pumping
Best fuel economy 14 litres/hour

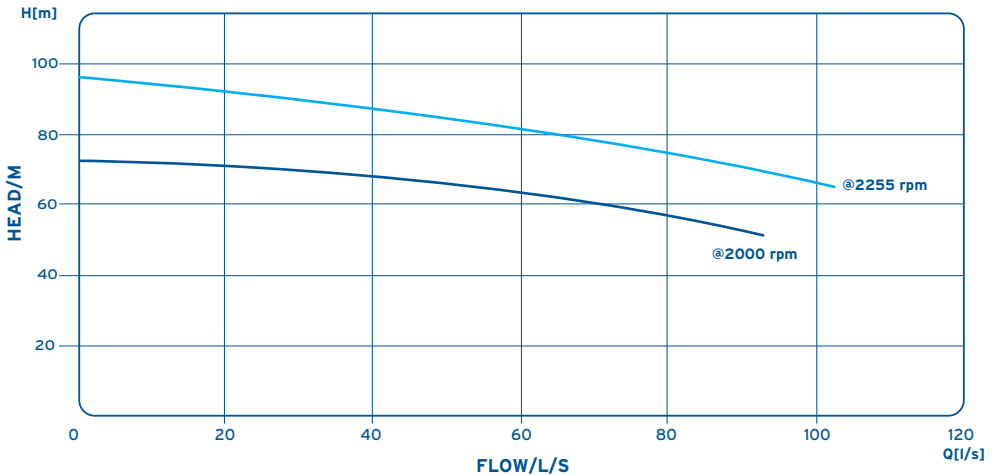

SYKES PUMPS 

sykes-pumps.com

or call us Free on **0800 211 611**


**HIGH
PERFORMANCE**

HP150
SUPER SILENCED


62

PUMP PERFORMANCE

Performance:	Max head: 105 m
	Max flow: 90 l/s
	Max solid: 20 mm
Weight:	2100 kg
Dimensions: (L x W x H) mm	4090 x 1370 x 1685
Pipe connections:	Suction: 6" Table D
	Discharge: 4" NP16
	Bauer couplings option
Fuel consumption:	Full load @ 1800 rpm: 26.5 litres/hour
Energy Efficient duty point:	Fuel Consumption @ 1800 rpm: 21.9 litres/hour
Separate fuel tank required	

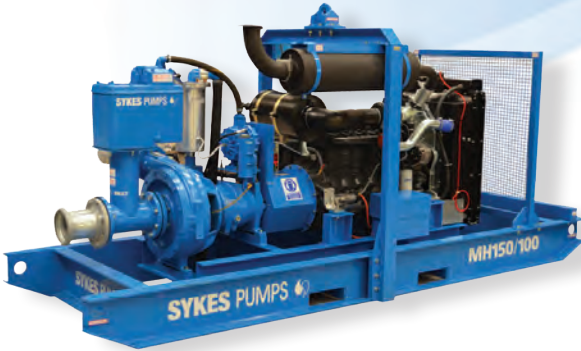

Smart pumping
Best fuel economy 21.9 litres/hour

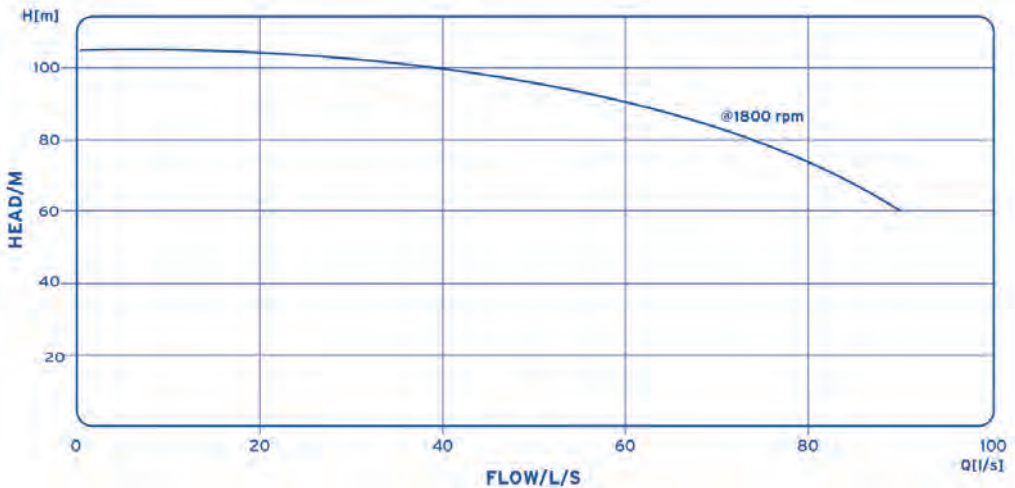

SYKES PUMPS 

sykes-pumps.com

or call us Free on **0800 211 611**

**HIGH
PERFORMANCE**

MH150/100

MH150/100 SUPER WISPASET

PUMP PERFORMANCE

Performance:	Max head: 105 m
	Max flow: 90 l/s
	Max solid: 20 mm
Weight:	2905 kg
Dimensions: (L x W x H) mm	4090 x 1370 x 1685
Noise level:	@7m = 70 dBA
Pipe connections:	Suction: 6" Table D
	Discharge: 4" NP16
	Bauer couplings option


Fuel consumption: Full load @ 1800 rpm:
26.5 litres/hour

Energy Efficient duty point: **Fuel Consumption @ 1800 rpm:**
21.9 litres/hour

Separate fuel tank required



Smart pumping
Best fuel economy 21.9 litres/hour

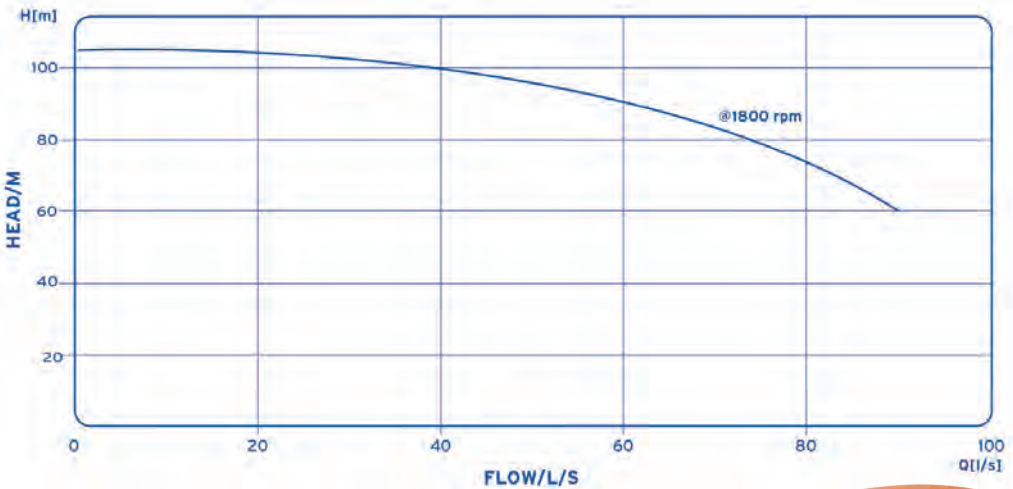

SYKES PUMPS 

sykes-pumps.com

or call us Free on **0800 211 611**

**HIGH
PERFORMANCE**

MH150/100
SUPER WISPASET

66

PUMP PERFORMANCE

Performance:	Max head: 55m
	Max flow: 190 l/s
	Max solid: 95 mm
Weight:	3500 kg
Dimensions: (L x W x H) mm	3640 x 1750 x 1740
Noise level:	@ 7m = 70 dBA
Pipe connections:	Suction: 8" Table D
	Discharge: 8" Table D
	Bauer couplings option


Fuel consumption: Full load @ 1460 rpm:
20.47 litres/hour

Energy Efficient duty point: **Fuel Consumption @ 1200 rpm:**
14 litres/hour

Separate fuel tank required



Smart pumping
Best fuel economy 14 litres/hour

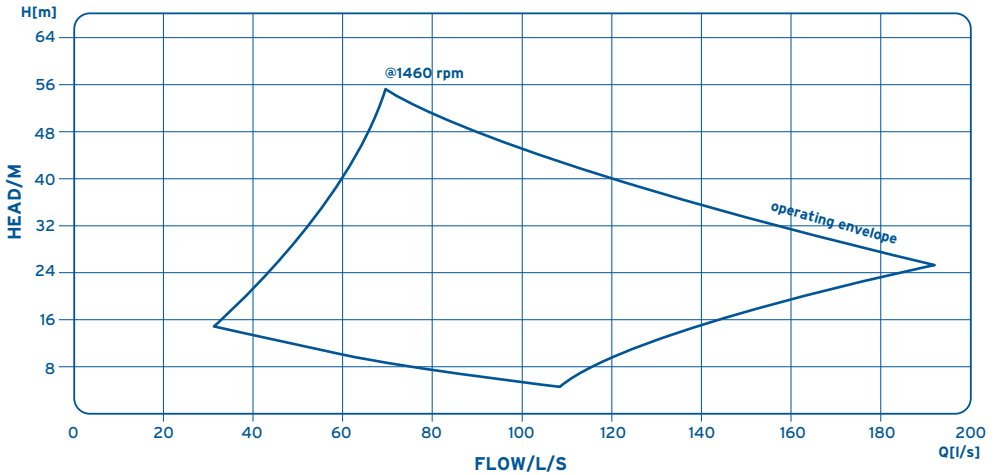

SYKES PUMPS 

sykes-pumps.com

or call us Free on **0800 211 611**


**HIGH
PERFORMANCE**

HS200

68

UVO 150/100E

PUMP PERFORMANCE

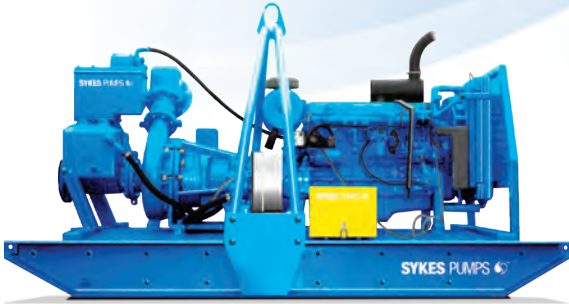

Performance:

Max head: 93 m

Max flow: 120 l/s

Max solid: 38 mm

Weight:

3750 kg with fuel

3400 kg without fuel

Dimensions:

(L x W x H) mm

3505 x 1608 x 1977

Fuel tank capacity:

Fuel tank size on application where fitted, separate bunded tanks available.

Pipe connections:

Suction: 6" Table D

Discharge: 4" Table D

Option Bauer Couplings


Fuel consumption:

Full load @ 1800 rpm:
30 litres/hour

Energy Efficient duty point:

Fuel Consumption @ 1500 rpm:
18.6 litres/hour

Smart pumping
Best fuel economy 18.6 litres/hour

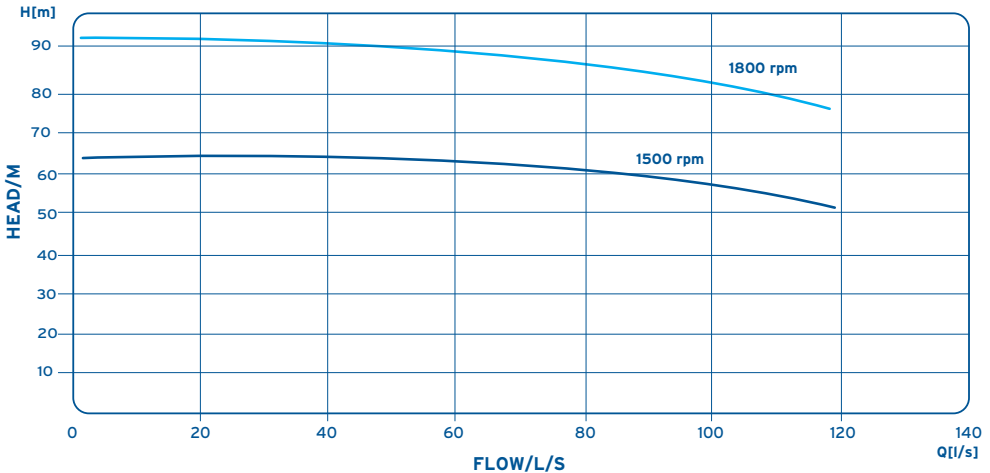

SYKES PUMPS 

sykes-pumps.com

or call us Free on **0800 211 611**


**HIGH
PERFORMANCE**

UVO 150/100E

70

UVO 150/100 SUPER WISPASET

PUMP PERFORMANCE

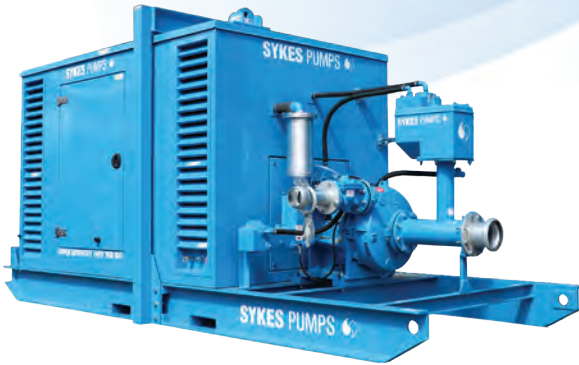

Performance:

Max head: 93 m

Max flow: 120 l/s

Max solid: 38 mm

Weight:

4100 kg

Dimensions:

(L x W x H) mm

4750 x 2120 x 2480

Noise Level:

@7m = 70 dBA

Fuel tank capacity:

Separate banded tanks available.

Pipe connections:

Suction: 6" Table D

Discharge: 4" NP16

Option Bauer Couplings

Fuel consumption:


Full load @ 1800 rpm:

28 litres/hour

**Energy Efficient
duty point:**

**Fuel Consumption @ 1500 rpm:
16.8 litres/hour**

Smart pumping
Best fuel economy 16.8 litres/hour

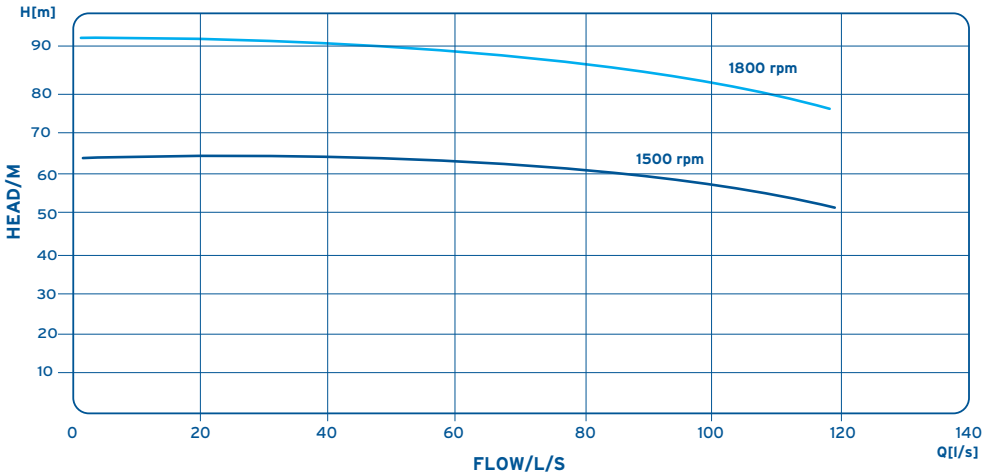

SYKES PUMPS 

sykes-pumps.com

or call us Free on **0800 211 611**

**HIGH
PERFORMANCE**

UVO 150/100
SUPER WISPASET

72

UVO 200/150F (D70)

PUMP PERFORMANCE

Performance: Max head: 108 m

Max flow: 325 l/s

Max solid: 60 mm

Weight: 8450 kg with fuel

6320 kg without fuel

Dimensions:
(L x W x H mm)

5330 x 2385 x 2260

Fuel tank capacity: Fuel tank size on application where fitted, separate bunded tanks available.


Pipe connections: Suction: 8" Table D

Discharge: 6" Table D


Option Bauer Couplings

Fuel consumption: Full load @ 1800 rpm:
99.9 litres/hour

Energy Efficient duty point: **Fuel Consumption @ 1600 rpm:**
72.67 litres/hour

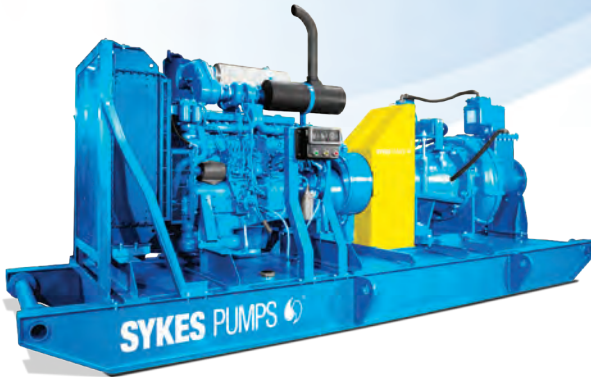

Smart pumping
Best fuel economy 72.67 litres/hour

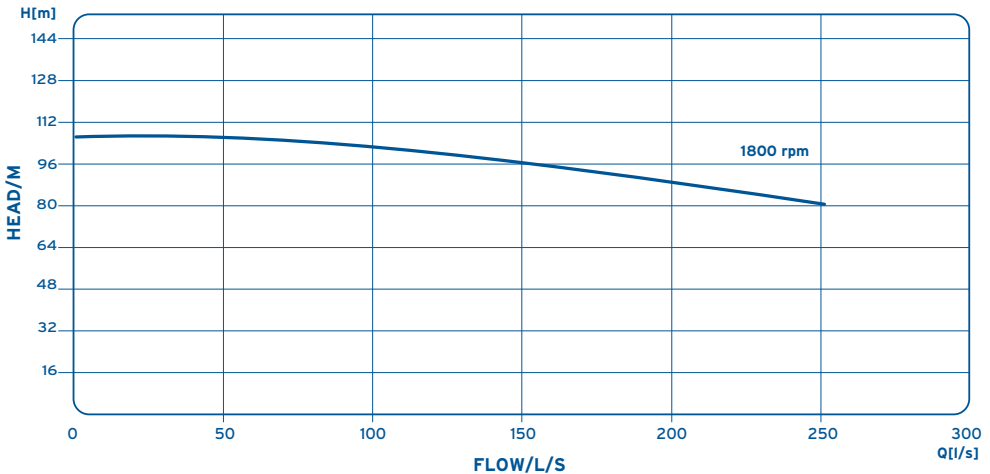

SYKES PUMPS 

sykes-pumps.com

or call us Free on **0800 211 611**

**HIGH
PERFORMANCE**

UVO 200
150F (D70)

74

UVO 200/150F (D90)

PUMP PERFORMANCE

Performance: Max head: 135 m
Max flow: 375 l/s
Max solid: 60 mm

Weight: 8680 kg with fuel
6570 kg without fuel

Dimensions: 5330 x 2385 x 2167
(L x W x H) mm


Fuel tank capacity: Fuel tank size on application where fitted, separate bunded tanks available.

Pipe connections: Suction: 8" Table D
Discharge: 6" Table D
Option Bauer Couplings


Fuel consumption: Full load @ 1600 rpm:
111 litres/hour

Energy Efficient duty point: **Fuel Consumption @ 1500 rpm:**
92.5 litres/hour

Silenced version available

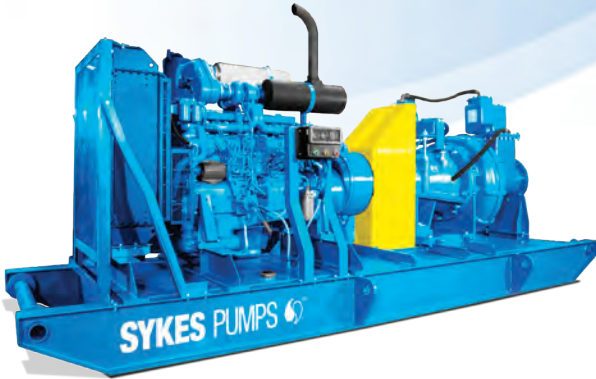

Smart pumping
Best fuel economy 92.5 litres/hour

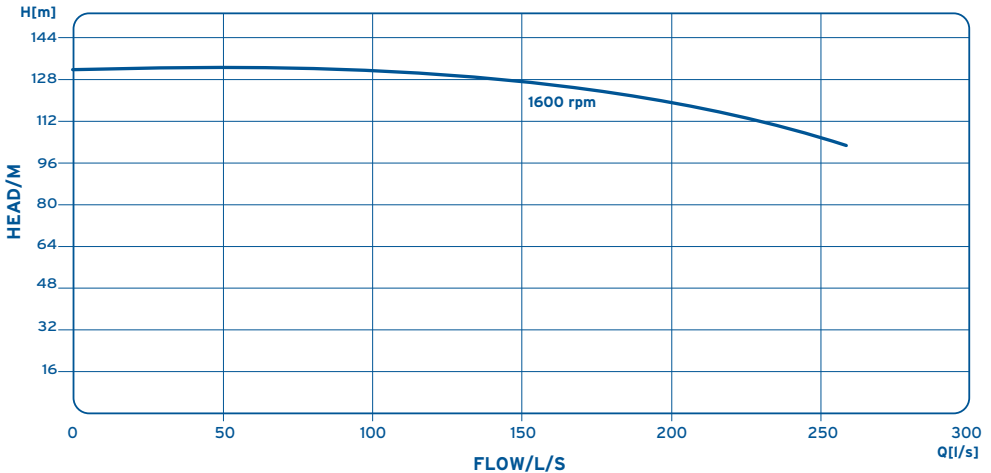

SYKES PUMPS 

sykes-pumps.com

or call us Free on **0800 211 611**

**HIGH
PERFORMANCE**

UVO 200
150F (D90)

76

UVO 200/150 (D90) SILENCED

PUMP PERFORMANCE

Performance:

Max head: 135 m

Max flow: 375 l/s

Max solid: 60 mm

Weight:

9600 kg

Dimensions:

(L x W x H mm)

5400 x 2200 x 2570

Noise level:

@ 7m = 71 dBA

Pipe connections:

Suction: 8" Table D

Discharge: 8" Table D

Option Bauer Couplings

Fuel consumption:

Full load @ 1600 rpm:

106 litres/hour


Energy Efficient duty point:

Fuel Consumption @ 1500 rpm:
92.5 litres/hour

Separate fuel tank required



Smart pumping
Best fuel economy 92.5 litres/hour

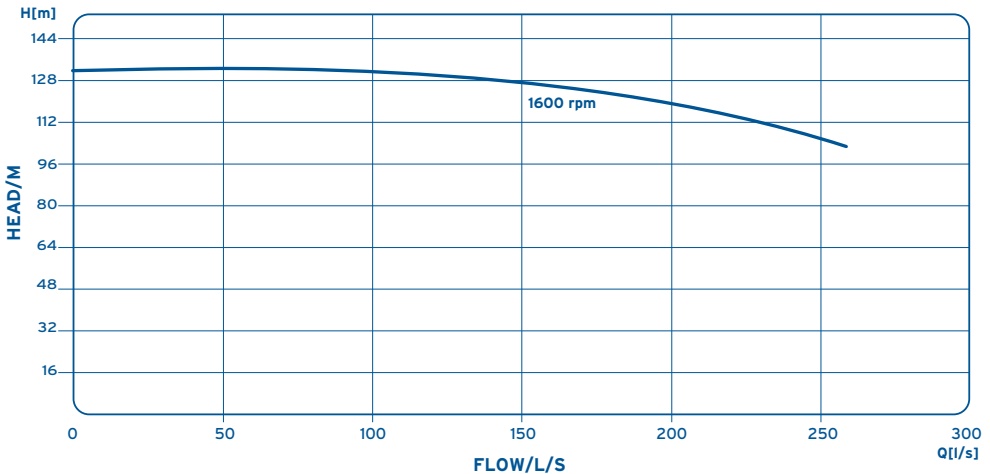

SYKES PUMPS 

sykes-pumps.com

or call us Free on **0800 211 611**

**HIGH
PERFORMANCE**

UVO 200
150 (D90)

78

PUMP PERFORMANCE

Performance:

Max head: 190 m

Max flow: 118 l/s

Max solid: Clear water

Weight:

7250 kg with fuel

5135 kg without fuel

Dimensions: (L x W x H) mm

5330 x 2385 x 2260

Fuel tank capacity:

Fuel tank size on application where fitted, separate bunded tanks available.

Pipe connections:

Suction: 150 NP25

Discharge: 150 NP25

Option Bauer Couplings

Suction Only

Fuel consumption:


Full load @ 1800 rpm:

71.4 litres/hour


Energy Efficient duty point:

Fuel Consumption @ 1500 rpm:

26 litres/hour

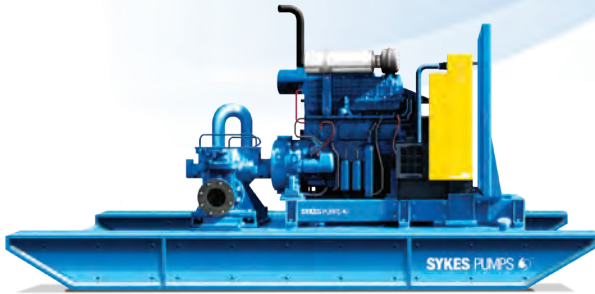

Smart pumping
Best fuel economy 26 litres/hour

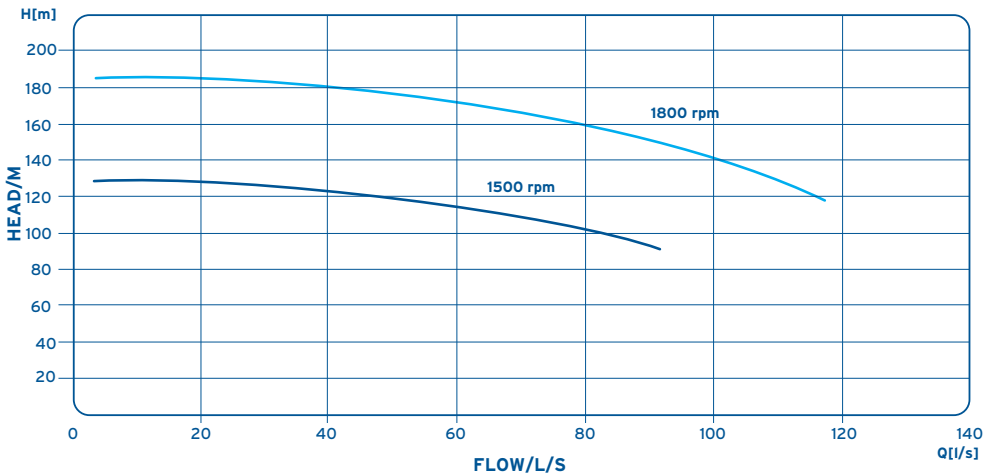

SYKES PUMPS 

sykes-pumps.com

or call us Free on **0800 211 611**

**HIGH
PERFORMANCE**

DRC 150/150

80

BENTONITE

.....

Specifically designed for pumping heavy slurries on challenging applications, the Sykes Bentonite range offers clients from building and engineering backgrounds large pump performance without the high fuel costs normally associated.

Both the B150 and B150E models have been designed off the back of comprehensive research that includes customer input, with the Bentonite products possessing similar specifications to our ever-popular GPI50M pumps.

Manufactured in the UK, our Bentonite units are compliant with the industry's most stringent regulations both in this country and in Europe, with their robust construction guaranteeing suitability for even the toughest projects and environments.

Trusted components from previous innovations help safeguard reliability and cost-efficient servicing, while an automatic/manual control panel affords the user unrivalled flexibility.

Flow rates of up to 90 l/s combined with solids handling of up to 52 mm highlights the versatility of our Bentonite range, and these features are accompanied by intuitive safety traits. A priming shut-off valve facilitates secure operation on a flooded suction, rendering the pumps perfect for virtually any situation.



B150 BENTONITE PUMP



PUMP PERFORMANCE

Performance:

Max head: 38 m

Max flow: 90 l/s

Max solid: 52 mm

Weight:

1433 kg with fuel

1300 kg without fuel

Dimensions:

(L x W x H) mm

2420 x 1160 x 1600

Noise level:

@ 7m = 70 dBA

Fuel tank capacity:

160 litres. Max 39 hours with cleaning and flushing facilities

Pipe connections:

Suction: 6" table D

Discharge: 6" table D

Bauer couplings option 6"

Fuel consumption:

Full load @ 1800 rpm:


9.8 litres/hour

Energy Efficient duty point:

Fuel Consumption @ 1500 rpm:

4.1 litres/hour

Smart pumping
Best fuel economy 4.1 litres/hour

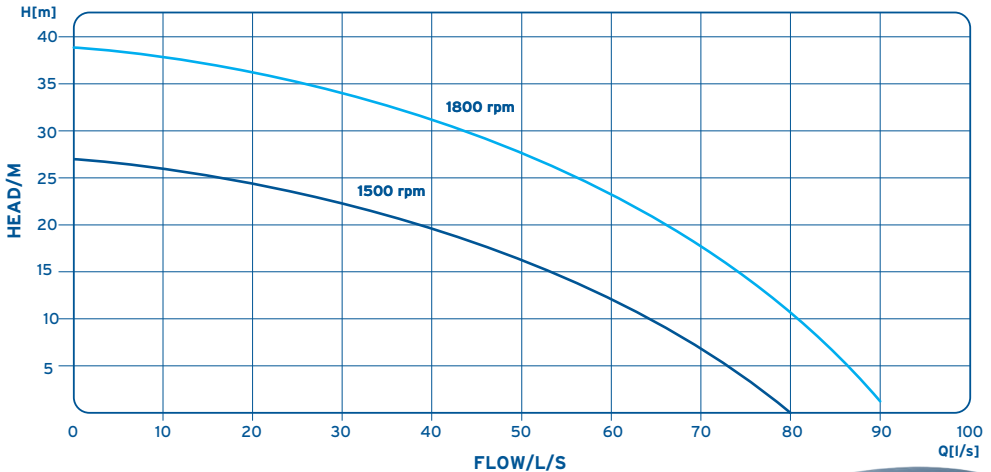

SYKES PUMPS 

sykes-pumps.com

or call us Free on **0800 211 611**

BENTONITE

B150


84

B150E BENTONITE PUMP



PUMP PERFORMANCE

Performance:	Max head: 27 m
	Max flow: 78 l/s
	Max solid: 52 mm
Weight:	1050 kg
Dimensions: (L x W x H) mm	2100 x 1000 x 1560
Noise level:	@ 7m = 68 dBA
Pipe connections:	Suction: 6" table D
	Discharge: 6" table D
	Bauer couplings option: 6"
Motor:	30 kW IE3 motor
	415v 3ph 50 Hz

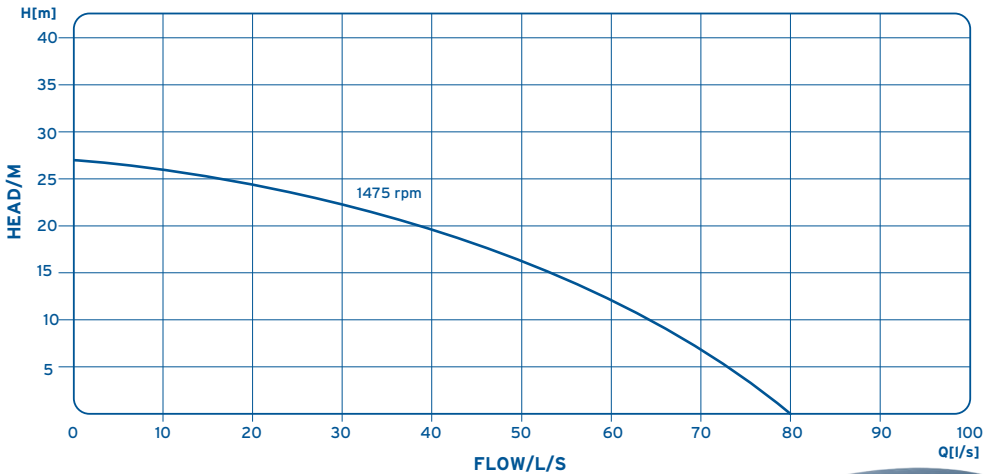

SYKES PUMPS 

sykes-pumps.com

or call us Free on **0800 211 611**

BENTONITE

B150E

86

SUBMERSIBLE HYDRAULIC

Our range of high performance hydraulic submersible pumps provides users with a credible alternative to conventional diesel driven units in environments with no accessible power supply.

A semi-silenced engine drives the hydraulic system enabling quiet operation, making it ideal for assignments carried out in noise sensitive areas. Robustly manufactured for the most arduous locations, our pumps are fitted with high pressure motors and replaceable stainless steel wear plates, reducing the risk of abrasion and other damage. Perfect for non-stop dry running, these self-priming pumps are capable of automatic shutdown should they become blocked at any point.

Sykes Hydrasets are available for hire and will help clients streamline projects without raising energy costs. This latest innovation comprises of a Sykes Hydrapak, a Sykes Hydrapump and a set of Sykes Hydrachose and provides an alternative solution where suction lift requirements exceed nine metres, or where access is limited.

Each pump can be easily manoeuvred into position using the site chassis and if required, forklifted or craned into place. Hydrasets can offer an effective substitute to end suction diesels and come complete with different Pump-end options for sewage and drainage applications.




H50 & HH50



PUMP PERFORMANCE

Model:	H50	HH50
Max head:	26 m	41 m
Max flow:	13.7 l/s	7.5 l/s
Max solid:	10 mm	3 mm
Discharge:	2" Bauer	2" Bauer
Weight (kg):		
Pump End:	20 kg	20 kg
Powerpack:	1100 kg	1100 kg
Dimensions: (L x H x W) mm		
Pump End:	225 x 300 x 195	
Powerpack:	1830 x 1670 x 1000	
Hydraulic lines:	20 metres	
Fuel tank capacity:	190 litres	
Fuel consumption:	5 litres/hour	
Noise:		
Sound pressure level:	@ 7m = 59 dBA	
Sound power level:	90 LWA	

Please see the pump
accessory section

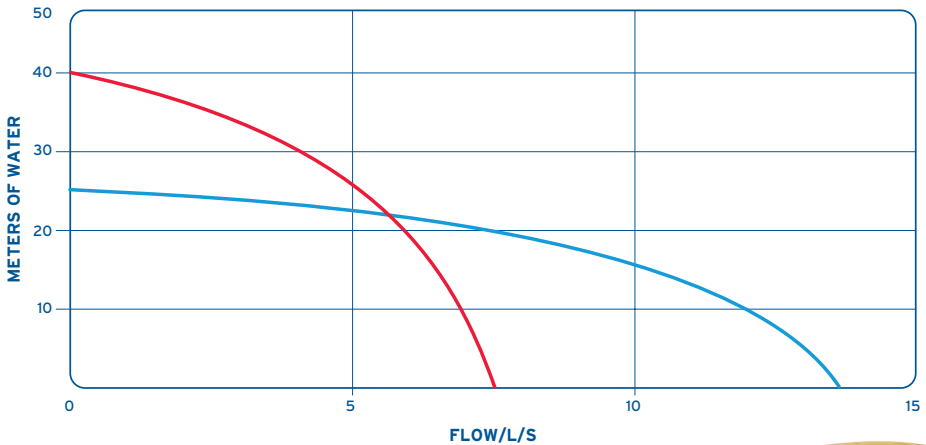

SYKES PUMPS 

sykes-pumps.com

or call us Free on **0800 211 611**

**SUBMERSIBLE
HYDRAULIC**

H50 & HH50

90

H80

PUMP PERFORMANCE

Performance: Max head: 31 m
Max flow: 31 l/s
Max solid: 22mm

Discharge: 3" Bauer

Weight (Kg): Pump End: 41 kg
Powerpack: 850 kg

Dimensions:
(L x H x W) mm

Pump End: 360 x 300 x 550
Powerpack: 1820 x 1090 x 1830

Hydraulic lines: 20 metres

Fuel tank capacity: 145 litres


Fuel consumption: 5 litres/hour

Noise Level: @ 7m = 75 dBA

Super silenced power pack available



Please see the pump
accessory section

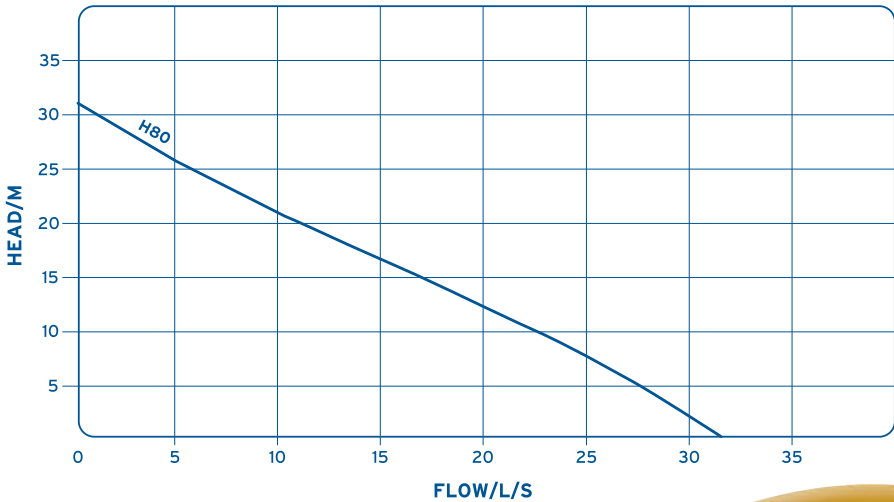

SYKES PUMPS 

sykes-pumps.com

or call us Free on **0800 211 611**

**SUBMERSIBLE
HYDRAULIC**

H80

92

100S

PUMP PERFORMANCE

Performance: Max head: 46 m
Max flow: 38 l/s
Max solid: 70mm

Discharge: 4" Bauer

Weight (Kg): Pump End: 55 kg
Powerpack: 995 kg

Dimensions:
(L x H x W) mm

Pump End: 465 x 350 x 745
Powerpack: 1900 x 1100 x 1720

Hydraulic lines: 20 metres

Fuel tank capacity: 145 litres


Fuel consumption: 9 litres/hour

Noise Level: @ 7m = 75 dBA

Super silenced power pack available



Please see the pump
accessory section

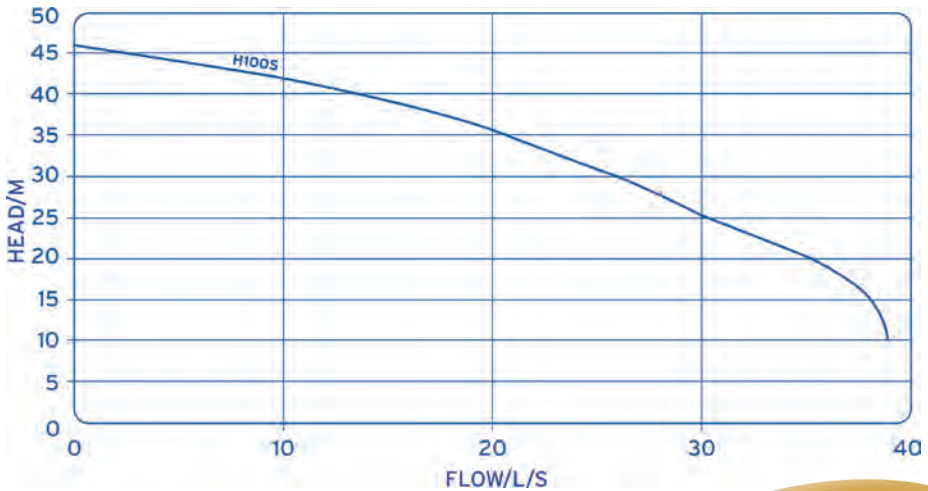

SYKES PUMPS 

sykes-pumps.com

or call us Free on **0800 211 611**

**SUBMERSIBLE
HYDRAULIC**

100S

94

H100 & H150

PUMP PERFORMANCE

Model:	H100	H150
Max head:	40 m	22 m
Max flow:	62 l/s	95 l/s
Max solid:	38 mm	65 mm
Discharge:	4" Bauer	6" Bauer
Weight (kg):		
Pump End:	51 kg	105 kg
Powerpack:	995 kg	995 kg

Dimensions:
(L x H x W) mm
 Pump End (H100): 465 x 350 x 745
 Pump End (H150): 650 x 500 x 970
 Powerpack: 1900 x 1100 x 1720

Hydraulic lines: 20 metres


Fuel tank capacity: 145 litres

Fuel consumption: 9 litres/hour

Noise Level: @ 7m = 75 dBA

Super silenced power pack available

Please see the pump accessory section

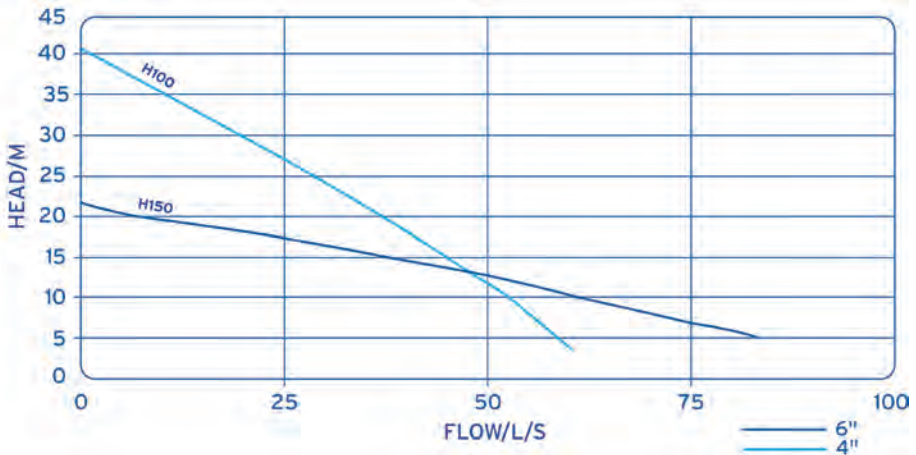

SYKES PUMPS 

sykes-pumps.com

or call us Free on **0800 211 611**

**SUBMERSIBLE
HYDRAULIC**

H100 & H150

96

SUBMERSIBLE DRAINAGE



Sykes Electric Submersible Drainage Pumps are ideal for dewatering all kinds of construction sites, from small building projects to large civil engineering contracts such as dams, bridges, quarries, tunnels and open cast mines. These pumps are compact and easy to handle and deliver impressive head and flow performance, making them suitable for most market sectors including marine, power generation, industrial and many others. Pump sizes range from 50mm - 250mm.

Sykes provide a full selection of control panels for use with electric submersibles. Panels can enable users to leave pumps unattended for long periods whilst improving safety, efficiency and reducing wear. PLC panels are used for pumps of up to 11kW and these are available in 1 phase or 3 phase.

Larger pumps use Soft-Start and Variable Frequency panels to provide smooth starting from the minimum of mains and generator supply. This gives the user considerable fuel savings.

For specialist applications Variable Speed Drives, Dual and Multi Pump Panels are readily available. Telemetry, High Level Alarms and Ultrasonic Level Controls can also be provided.


LSC-4



PUMP PERFORMANCE

Model:	LSC-4
Motor type (V):	110 (1-Phase) 50Hz
Motor rating (Kw):	0.48
Running current (Amps):	2.9
Discharge Spigot:	25mm or 2" Bauer
Dimensions: (H x W) mm	316 x 196
Weight: (excl cable) Kg	11

Please see the pump
accessory section

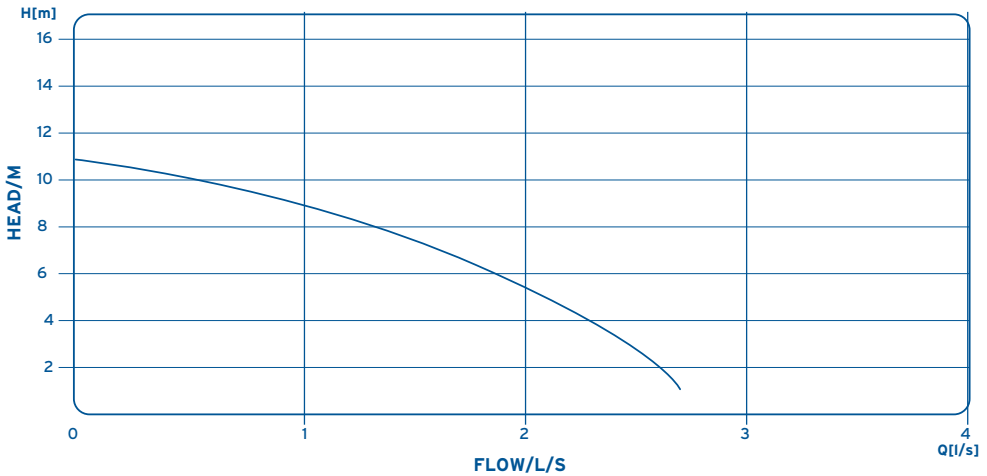

SYKES PUMPS 

sykes-pumps.com

or call us Free on **0800 211 611**

**SUBMERSIBLE
DRAINAGE**

LSC-4


100



PUMP PERFORMANCE

Model:	P501
Motor type (V):	110 (1-Phase) 50Hz
Motor rating (Kw):	0.75
Max power input (Kw):	0.9
Running current (Amps):	7
Discharge Spigot:	2" Bauer
Dimensions: (H x W) mm	361 x 184
Weight: (excl cable) Kg	14
Integral float control	Optional

Please see the pump
accessory section

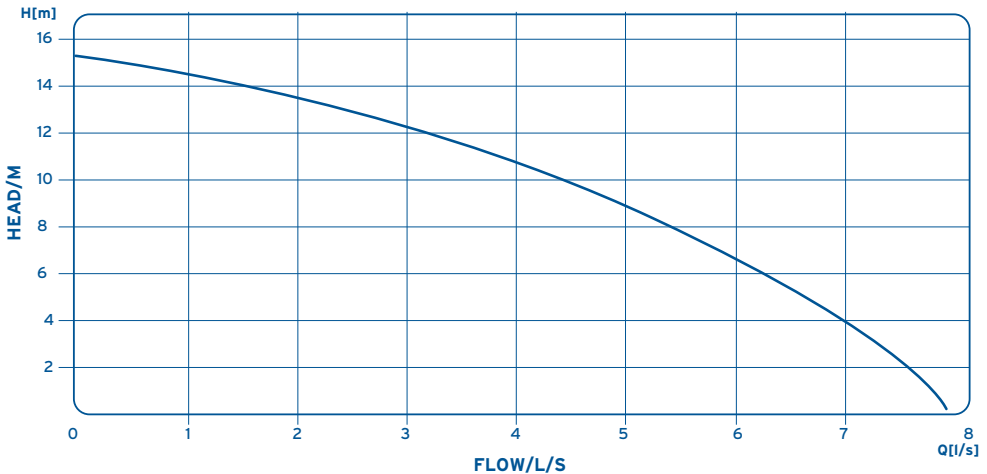

SYKES PUMPS 

sykes-pumps.com

or call us Free on **0800 211 611**

**SUBMERSIBLE
DRAINAGE**


P501



PUMP PERFORMANCE

Model:	P601W
Motor type (V):	110 (1-Phase) 50Hz
Motor rating (Kw):	0.9
Max power input (Kw):	1.2
Running current (Amps):	10.9
Discharge Spigot:	2" Bauer
Dimensions: (H x W) mm	530 x 231
Weight: (excl cable) Kg	16
Integral float control	

Please see the pump
accessory section

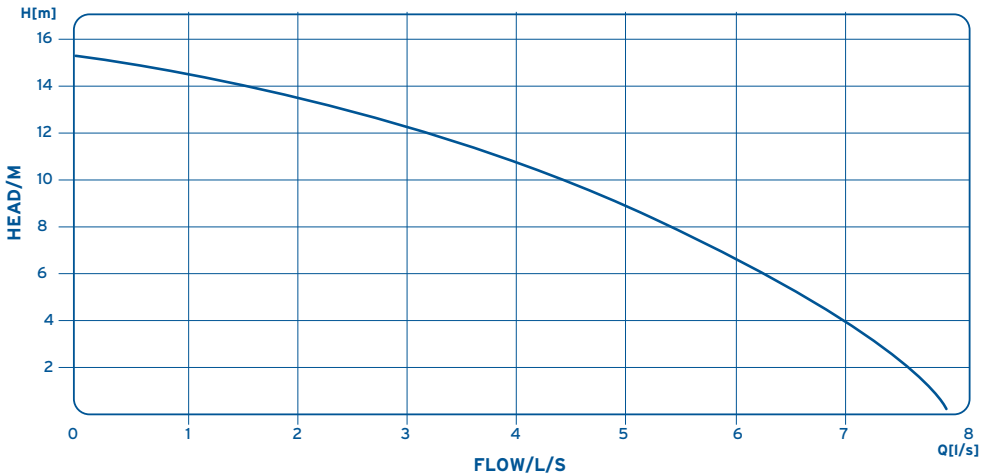


P701



PUMP PERFORMANCE

Model:	P701 W		P701 N
Motor type (V):	110 (1-Phase) 50Hz	240 (1-Phase) 50Hz	415 (3-Phase) 50Hz
Motor rating (Kw):	1.3	1.3	1.4
Max power input (Kw):	1.7	1.7	1.7
Running current: (Amps)	15.3	7.2	2.8
Discharge Spigot:	2" Bauer		
Dimensions: (H x W) mm	578 x 231		
Weight: (excl cable) Kg	20		

Please see the pump accessory section

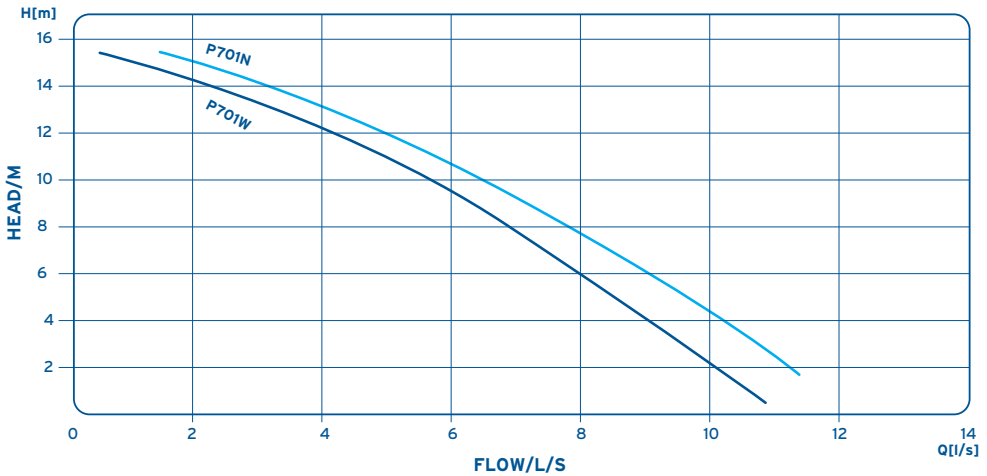

SYKES PUMPS 

sykes-pumps.com

or call us Free on **0800 211 611**

**SUBMERSIBLE
DRAINAGE**

P701


106



PUMP PERFORMANCE

Model:	P1001 W	P1001 N	P1001 H
Motor type (V):	240 (1-Phase) 50Hz	415 (3-Phase) 50Hz	415 (3-Phase) 50Hz
Motor rating (Kw):	1.7	2.2	2.2
Max power input (Kw):	2.3	3.0	3.0
Running current: (Amps)	10.5	5.5	5.5
Discharge Spigot:	3" Bauer		
Dimensions (mm):			
Height	577		
Maximum Width	296		
Minimum Width	230		
Weight: (excl cable) Kg	27		

Please see the pump
accessory section

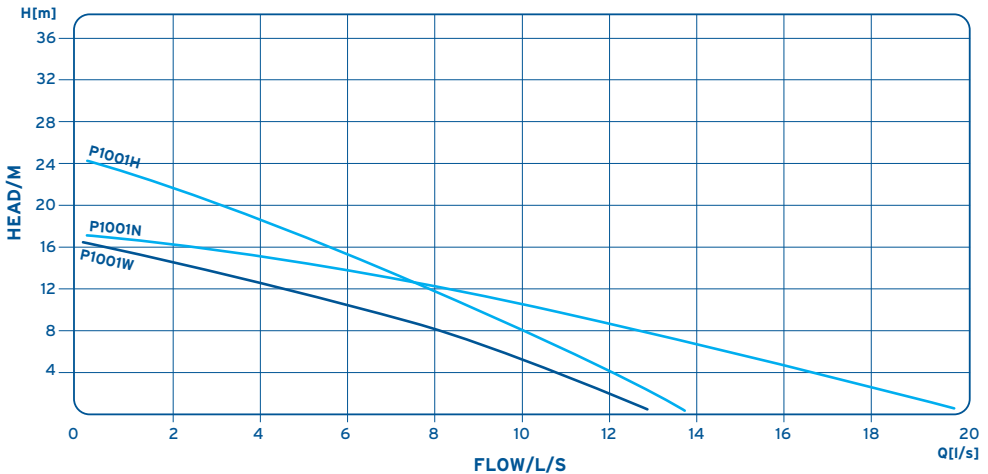




PUMP PERFORMANCE

Model:	P1501 N
Motor type (V):	415 (3-Phase) 50Hz
Motor rating (Kw):	4.2
Max power input (Kw):	5.0
Running current (Amps):	8.7
Discharge Spigot:	3" Bauer
Dimensions: (H x W) mm	577 x 296
Weight: (excl cable) Kg	36

Please see the pump
accessory section

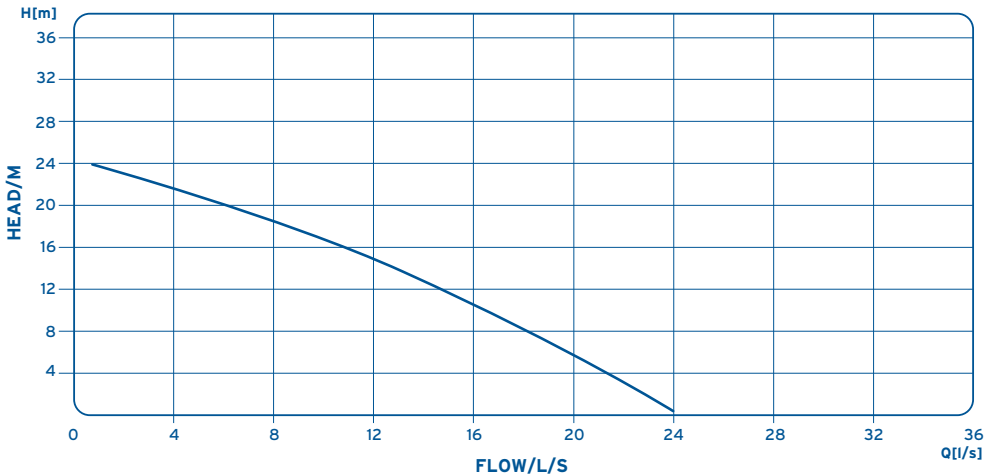


P2001



PUMP PERFORMANCE

Model:	P2001 N	P2001 H	P2001 V
Motor type (V):	415 (3-Phase) 50Hz	415 (3-Phase) 50Hz	415 (3-Phase) 50Hz
Motor rating (Kw):	5.8	5.8	5.8
Max power input (Kw):	6.8	6.8	6.8
Running current: (Amps)	12	12	12
Discharge Spigot:	3" or 4" Bauer		
Dimensions (mm):			
Height	686		
Maximum Width	364		
Minimum Width	289		
Weight: (excl cable) Kg	50		

Please see the pump
accessory section

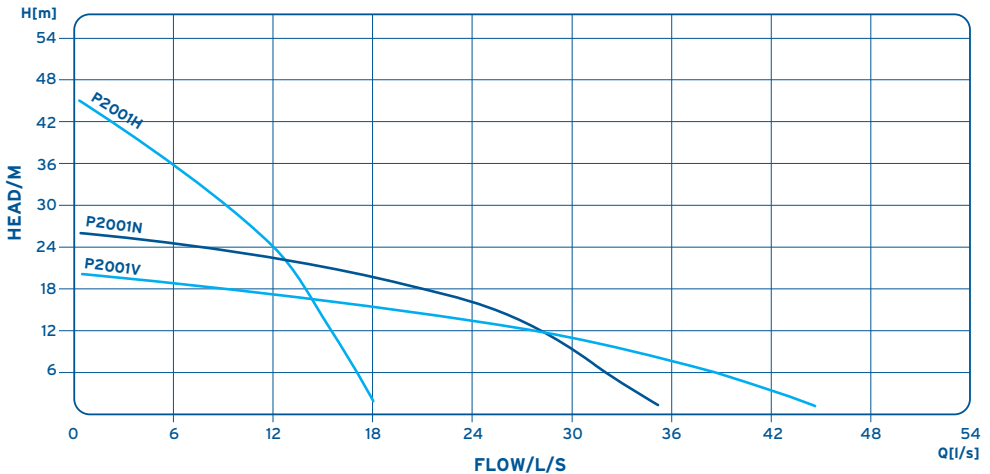

SYKES PUMPS 

sykes-pumps.com

or call us Free on **0800 211 611**

**SUBMERSIBLE
DRAINAGE**

P2001

112


P2002 N



PUMP PERFORMANCE

Model:	P2002 N
Motor type (V):	415 (3-Phase) 50Hz
Motor rating (Kw):	5.5
Max power input (Kw):	6.5
Running current: (Amps)	13.1
Discharge Spigot:	3" or 4" Bauer
Dimensions (mm):	
Height	656
Width	293
Weight: (excl cable) Kg	74

Please see the pump
accessory section

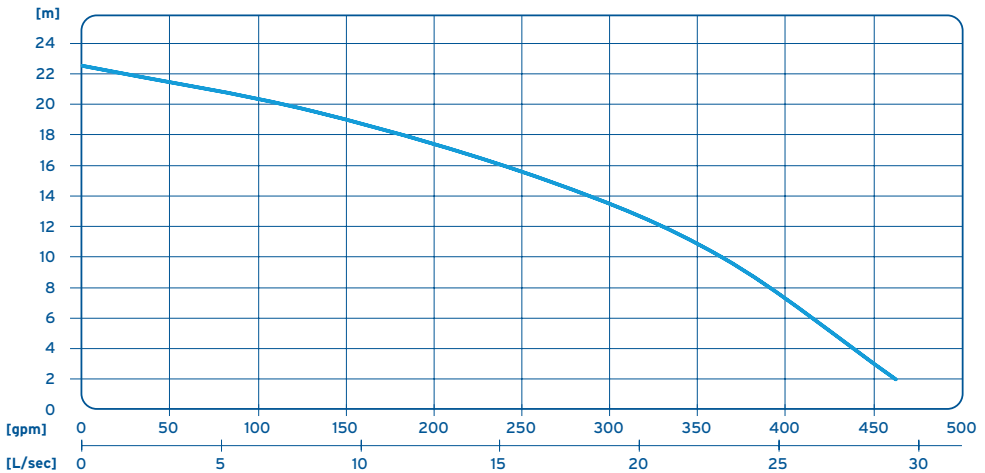

SYKES PUMPS 

sykes-pumps.com

or call us Free on **0800 211 611**

**SUBMERSIBLE
DRAINAGE**

P2002 N


P3001



PUMP PERFORMANCE

Model:	P3001 N	P3001 H	P3001 V
Motor type (V):	415 (3-Phase) 50Hz	415 (3-Phase) 50Hz	415 (3-Phase) 50Hz
Motor rating (Kw):	9.4	9.4	9.4
Max power input (Kw):	10.8	10.8	10.8
Running current: (Amps)	18	18	18
Discharge Spigot:	4" OR 6" Bauer		
Dimensions (mm):			
Height	771		
Maximum Width	364		
Minimum Width	289		
Weight:			
(excl cable) Kg	70 (P3001 N, P3001 V) 75 (P3001 H)		

Please see the pump accessory section

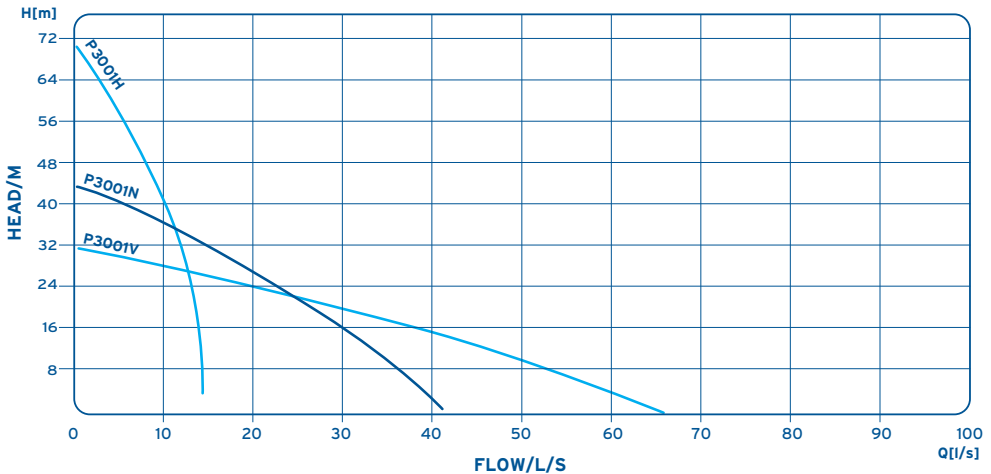

SYKES PUMPS 

sykes-pumps.com

or call us Free on **0800 211 611**

**SUBMERSIBLE
DRAINAGE**

P3001

116


P3002 N



PUMP PERFORMANCE

Model:	P3002 N
Motor type (V):	415 (3-Phase) 50Hz
Motor rating (Kw):	11
Running current: (Amps)	26
Discharge Spigot:	4" or 6" Bauer
Dimensions (mm):	
Height	870
Width	393
Weight: (excl cable) Kg	142

Please see the pump
accessory section

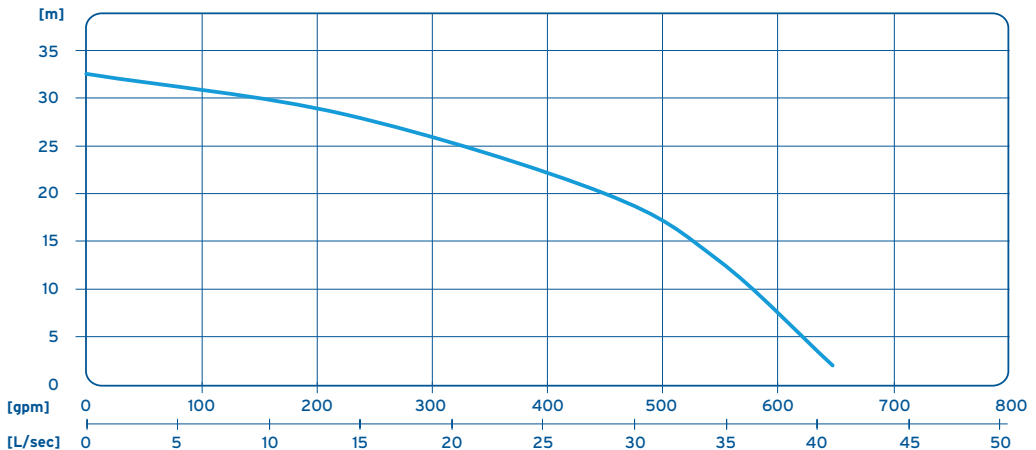

SYKES PUMPS 

sykes-pumps.com

or call us Free on **0800 211 611**

**SUBMERSIBLE
DRAINAGE**


P3002 N



PUMP PERFORMANCE

Model:	PX12 N Medium Head PX12 H High Head
Motor type (V):	415 (3-Phase) 50Hz
Motor rating (Kw):	22
Max power input (Kw):	24
Running current: (Amps)	44
Discharge Spigot:	4" or 6" Bauer
Dimensions (mm):	
Height	967
Maximum Width	570
Minimum Width	450
Weight: (excl cable) Kg	160

Please see the pump accessory section

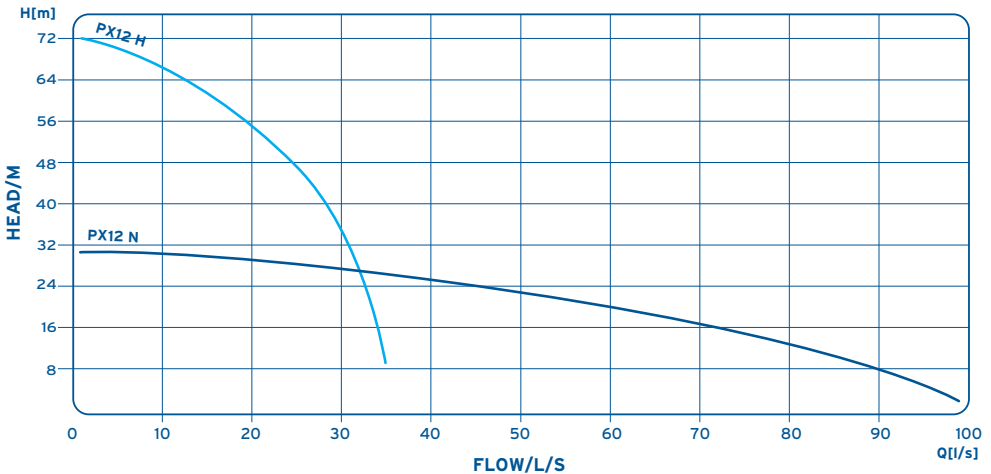




PUMP PERFORMANCE

Model:	PX22 N	PX22 H
	Medium Head	High Head
Motor type (V):	415 (3-Phase) 50Hz	415 (3-Phase) 50Hz
Motor rating (Kw):	35.0	35.0
Max power input (Kw):	39.5	39.5
Running current: (Amps)	64	64
Discharge Spigot:	6", 8" Bauer	6", 8" Bauer
Dimensions (mm):		
Height	1200	1120
Maximum Width	705	705
Minimum Width	658	533
Weight: (excl cable) Kg	270	270

Please see the pump accessory section

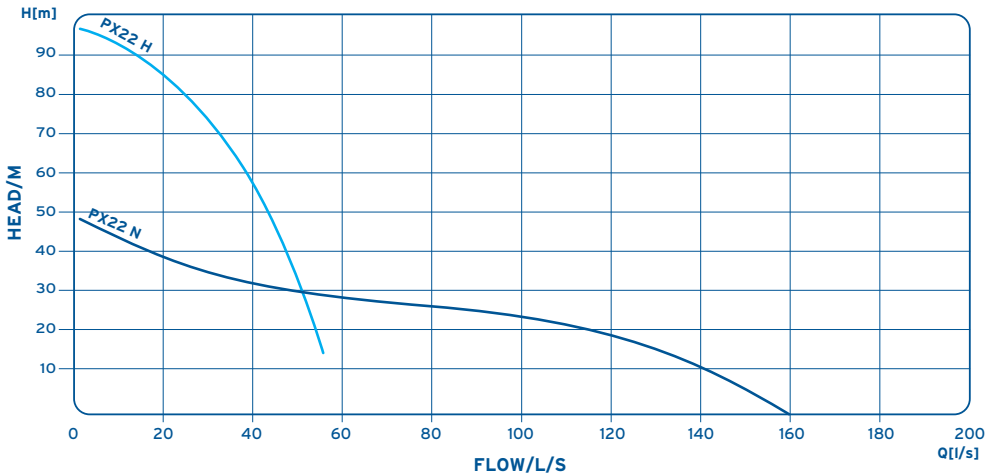




PUMP PERFORMANCE

Model:	PX30 N Medium Head	
	PX30 H High Head	
	50Hz	60Hz
Motor type (V):	415	415
	(3-Phase)	(3-Phase)
	50Hz	60Hz
Motor rating (Kw):	56.0	70.0
Max power input (Kw):	61.0	76.4
Running current: (Amps)	110	113
Discharge Spigot:	6" or 8" Bauer	
Dimensions (mm):		
Height	1130	
Maximum Width	935	
Minimum Width	776	
Weight: (excl cable) Kg	525	

Please see the pump accessory section

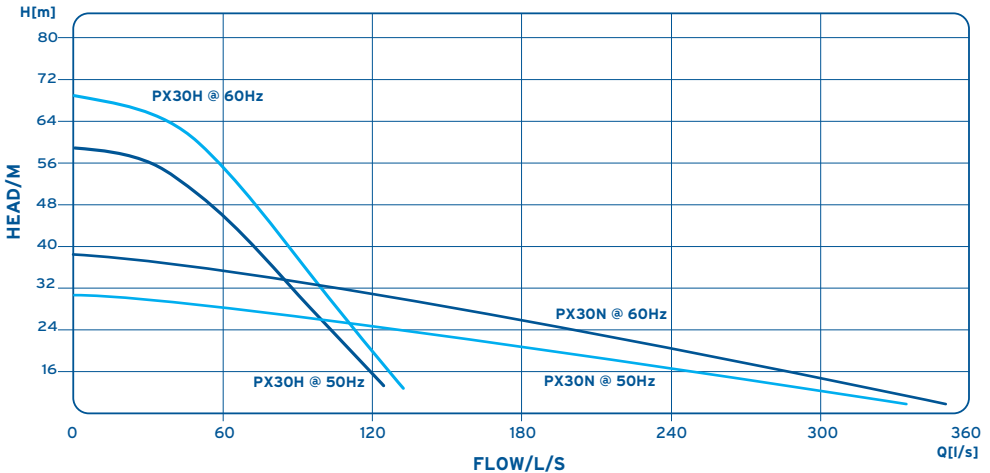



Zinc Anodes



Bauer Couplings



Series Connection



Bottom Suction
Adaptor

Please see the pump
accessory section



Zinc Anodes

All P series pumps can be equipped with zinc anodes for protection against galvanic corrosion, eg. when pumping saline or brackish water.

The zinc anodes are screwed onto the base plate and the main cover of the pump. They act as sacrificial anodes and protect the aluminium parts of the pump from galvanic corrosion attacks.

Bauer Couplings

Bauer couplings are available for quick connection of the delivery hose. The couplings can be supplied in sizes from 2" to 8".

Series Connection

Two or more pumps can be connected in series for pumping against high heads. Special series connections are available. The series connections have a centre inlet for hose connection. It is recommended to space the pumps at equal head intervals in order to distribute counter pressure evenly along the line.

Bottom Suction Adaptor

With a standard pump the water level cannot be lowered below the diffuser centre inlet. On pump types P601 to P1001 the standard bottom plate may be replaced by a bottom suction adaptor, which feeds the water directly into the diffuser through a bottom intake with strainer.

A basement floor can be pumped practically dry with this adaptor.

SUBMERSIBLE SLUDGE

Sykes Electric Submersible Sludge Pumps are ideal for pumping sludge, water with a sludge content and contaminated liquids. Capacity ranges from delivering flows up to 30 L/s and heads up to 30M. These light, portable, hard wearing pumps are compact in design and simple to install. Like all Sykes pumps, you can be assured of long, trouble free performance.

Sykes also offer a full selection of control panels. Panels enable users to leave pumps unattended for long periods whilst ensuring safe operation, efficient running and wear reduction.

For pumps up to 11kW, PLC panels are used and these are available in 1 phase or 3 phase.

Larger pumps use soft start and Variable Frequency control panels to ensure smooth starting from the minimum amount of mains or generator power supply. This gives the user considerable fuel savings.

For specialist applications Variable Speed Drives, Dual and Multi Pump Panels are also available. Telemetry, High Level Alarms and Ultrasonic Level Controls can also be provided.


JS750 SV



PUMP PERFORMANCE

Model:	JS 750 SV Automatic
Motor type (V):	110 (1-Phase) - 50 Hz
Motor rating (Kw):	0.75
Max power input (Kw):	1.0
Running current: (Amps)	9.0
Max solids (mm):	46
Discharge Spigot:	3" Bauer (80 mm)
Dimensions: (H x W) mm	495 x 530
Weight: (excl cable) Kg	25.4
Integral float control	

Please see the pump accessory section

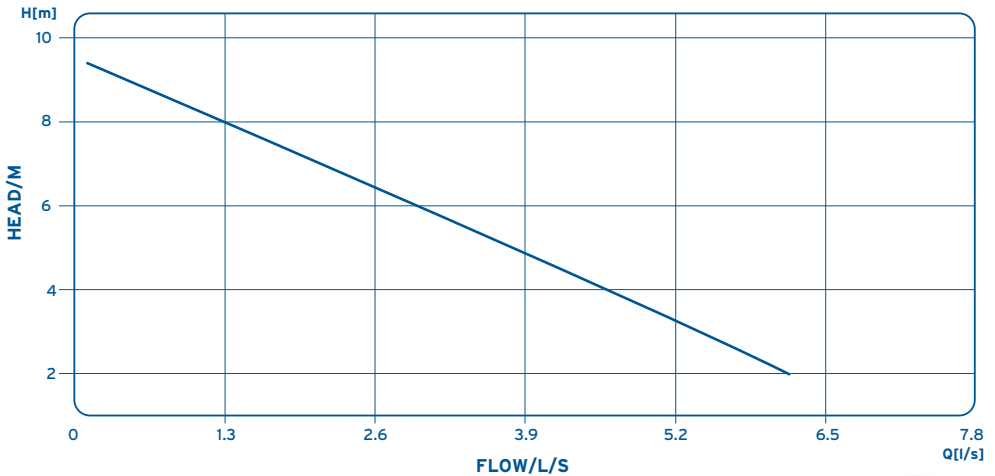

SYKES PUMPS 

sykes-pumps.com

or call us Free on **0800 211 611**

**SUBMERSIBLE
SLUDGE**

JS750 SV


130



PUMP PERFORMANCE

Model:	SP 20
Motor type (V):	415 (3-Phase) - 50 Hz
Motor rating (Kw):	1.3
Max power input (Kw):	1.7
Running current: (Amps)	4.2
Max solids (mm):	40
Discharge Spigot:	3" Bauer (80 mm)
Dimensions: (H x W) mm	700 x 320
Weight: (excl cable) Kg	29

Please see the pump
accessory section

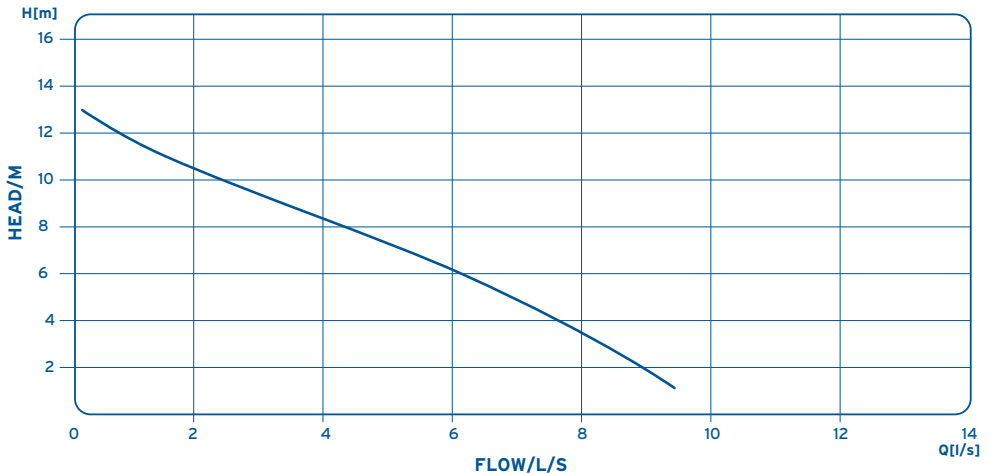




PUMP PERFORMANCE

Model:	SP 30
Motor type (V):	415 (3-Phase) - 50 Hz
Motor rating (Kw):	3.3
Max power input (Kw):	3.9
Running current: (Amps)	6.8
Max solids (mm):	60
Discharge Spigot:	3" Bauer (80 mm)
Dimensions: (H x W) mm	700 x 320
Weight: (excl cable) Kg	34

Please see the pump accessory section

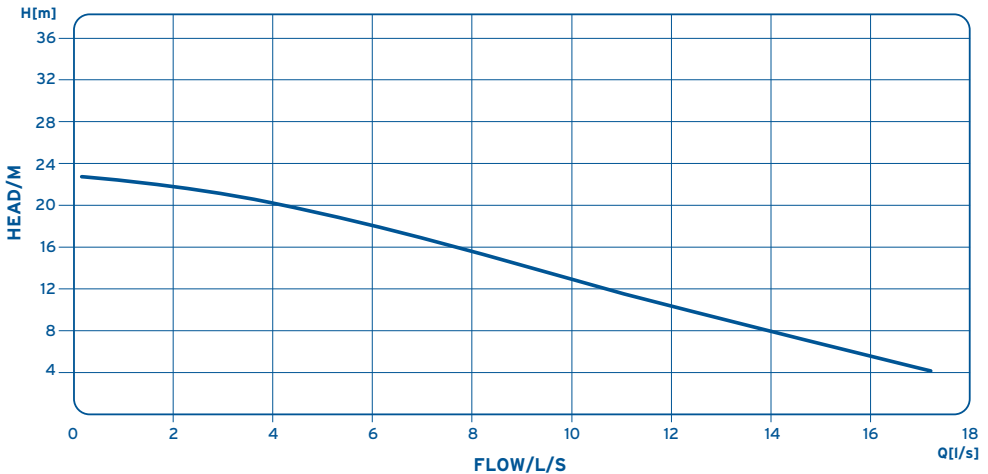




PUMP PERFORMANCE

Model:	SP 50
Motor type (V):	415 (3-Phase) - 50 Hz
Motor rating (Kw):	5.2
Max power input (Kw):	6.2
Running current: (Amps)	11
Max solids (mm):	65
Discharge Spigot:	3" Bauer (80 mm)
Dimensions: (H x W) mm	760 x 410
Weight: (excl cable) Kg	52

Please see the pump accessory section

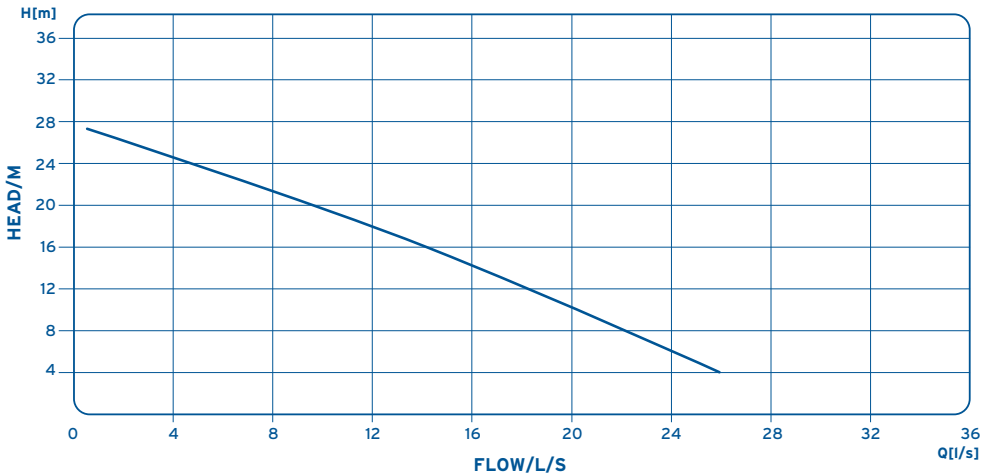




PUMP PERFORMANCE

Model:	SP 80
Motor type (V):	415 (3-Phase) - 50 Hz
Motor rating (Kw):	8.0
Max power input (Kw):	9.4
Running current: (Amps)	18
Max solids (mm):	65
Discharge Spigot:	4" Bauer (100 mm)
Dimensions: (H x W) mm	810 x 560
Weight: (excl cable) Kg	67

Please see the pump
accessory section

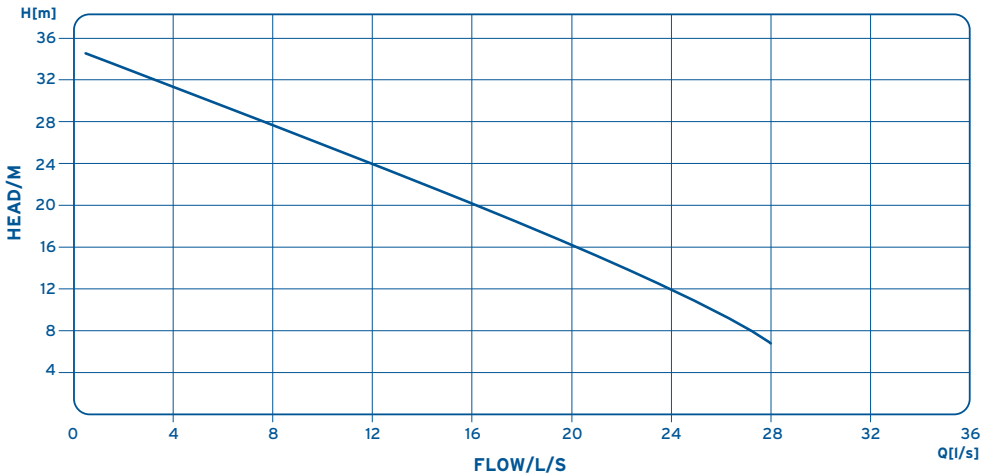

SUBMERSIBLE WASTEWATER



The Sykes Electric Submersible Wastewater Range features Atex approved models fitted with cooling jackets, for use where submersible pumps are permanently installed on a guide rail system. They are ideal where existing installed pumps have failed and a temporary solution is required.

Sykes wastewater submersible pumps can be configured to fit other manufacturers installations, using adapters that connect directly to the pump volutes and utilise the existing guide rail system. Portable versions are also available in all models, for use in wastewater treatment plants for emergency or temporary works and planned projects.

Sykes Electric Submersible Wastewater Pumps, are smooth running and vibration free. Built from ductile cast iron, these hardwearing, precision machined pumps work to maximum hydraulic efficiency and due to their modular design, are inexpensive to maintain, and assure long trouble free performance. The range starts at 80mm with larger pumps available up to 300mm discharge, with a selection of motor sizes to complement the range.

The amount of material Sykes Submersible Wastewater Pumps can shift depends on the size of the pump, the power of the drive motor and the constitution of the material being pumped for each application. To ensure the correct type and model is selected, we recommend one of our specialist pump engineers visits to survey your requirement free of charge.

SYKES PUMPS 

**SUBMERSIBLE
WASTEWATER**




PIRANHA S21, M30 & M70

PUMP PERFORMANCE

Model:	S21	M30	M70
Motor type (V):	415	415	415
Motor rating (Kw):	2.1	3.0	7.0
Max power input (Kw):	2.8	3.4	7.7
Running current: (Amps)	4.8	5.6	13.5
Discharge spigot:	2"	2"	2"
Maximum solids (mm):	Macerator	Macerator	Macerator
EX Rated:	Yes/No	Yes/No	Yes/No
Cooling jacket:	N/A	N/A	N/A
Dimensions (mm):			
Guide rail option:			
Height	460	586	653
Maximum Width	340	420	600
Minimum Width	310	425	425
Free standing:			
Height	460	586	653
Maximum Width	470	550	600
Minimum Width	310	425	425
Weight (Kg):	45	60	80

Please see the pump accessory section

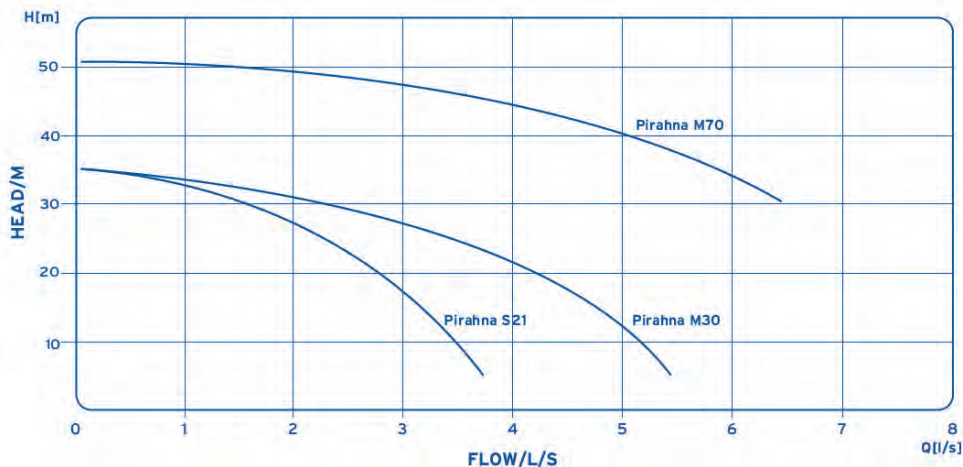

SYKES PUMPS 

sykes-pumps.com

or call us Free on **0800 211 611**

**SUBMERSIBLE
WASTEWATER**

PIRANHA S21,
M30 & M70

142

PIRANHA PE110




Please see the pump
accessory section



PUMP PERFORMANCE

Model:	PE110
Motor type (V):	415
Motor rating (Kw):	11
Max power input (Kw):	12.1
Running current: (Amps)	20.1
Discharge spigot:	2"
Maximum solids (mm):	Macerator
EX Rated:	Yes
Cooling jacket:	N/A
Dimensions (mm):	
Guide rail option:	
Height	844
Maximum Width	540
Minimum Width	333
Free standing:	
Height	870
Maximum Width	600
Minimum Width	425
Weight (Kg):	167

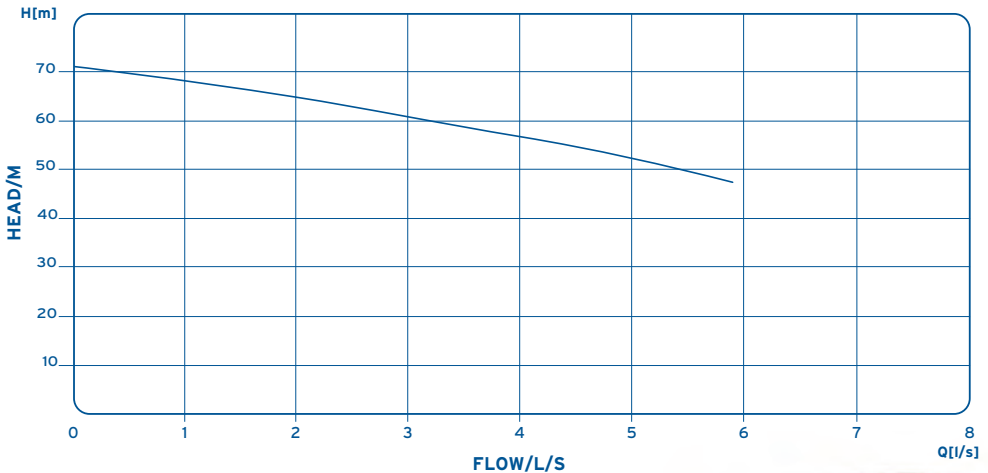

SYKES PUMPS 

sykes-pumps.com

or call us Free on **0800 211 611**

**SUBMERSIBLE
WASTEWATER**

PIRANHA
PE110

144

XFP80C CB1.2 & 1.3




Please see the pump
accessory section



PUMP PERFORMANCE

Model:	XFP80C CB1.2	XFP80C CB1.3
Motor type (V):	415	415
Motor rating (Kw):	2.9	2.2
Max power input (Kw):	3.5	2.5
Running current: (Amps)	6.4	4.6
Discharge spigot:	3"	3"
Maximum solids (mm):	75	75
EX Rated:	Yes	Yes
Cooling jacket:	Yes	Yes
Dimensions (mm):		
Guide rail option:		
Height	700	700
Maximum Width	435	435
Minimum Width	312	312
Free standing:		
Height	775	775
Maximum Width	695	695
Minimum Width	450	450
Weight (Kg):	100	95

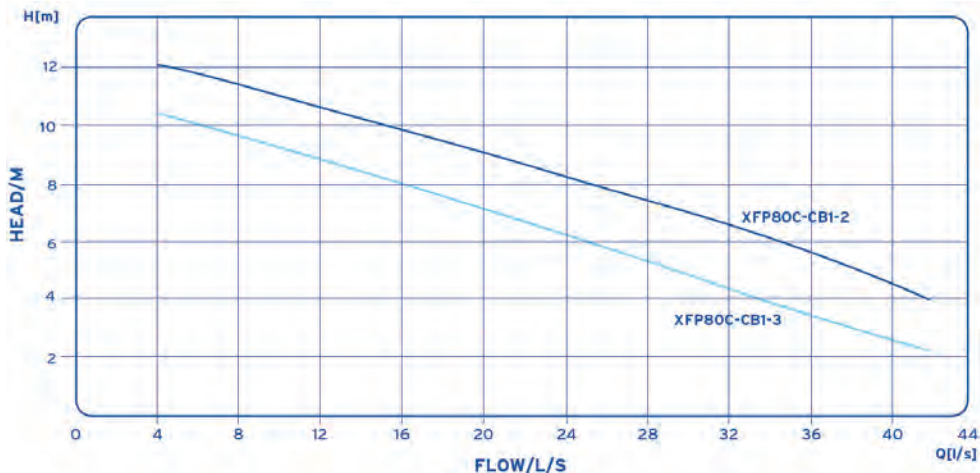

SYKES PUMPS 

sykes-pumps.com

or call us Free on **0800 211 611**

**SUBMERSIBLE
WASTEWATER**

XFP80C CB1.2
XFP80C CB1.3

146


AFPK0841



PUMP PERFORMANCE

Model:	AFPK0841	AFPK0841
Motor type (V):	415 (3-Phase) 50Hz	415 (3-Phase) 50Hz
Motor rating (Kw):	1.95	3
Running current: (Amps)	4.6	7.0
Running speed:	1450 rpm	1450 rpm
Discharge port (mm):	80	80
Suction inlet port (mm):	100	100
Maximum solids (mm):	80	80
EX Rated:	Yes	Yes
Cooling jacket:	Yes	Yes
Dimensions (H x W) mm:		
Guide rail option:	655 x 455	655 x 455
Weight (Kg):	95	95
Transportable option:	795 x 675	795 x 675
Weight (Kg):	105	105

Please see the pump accessory section

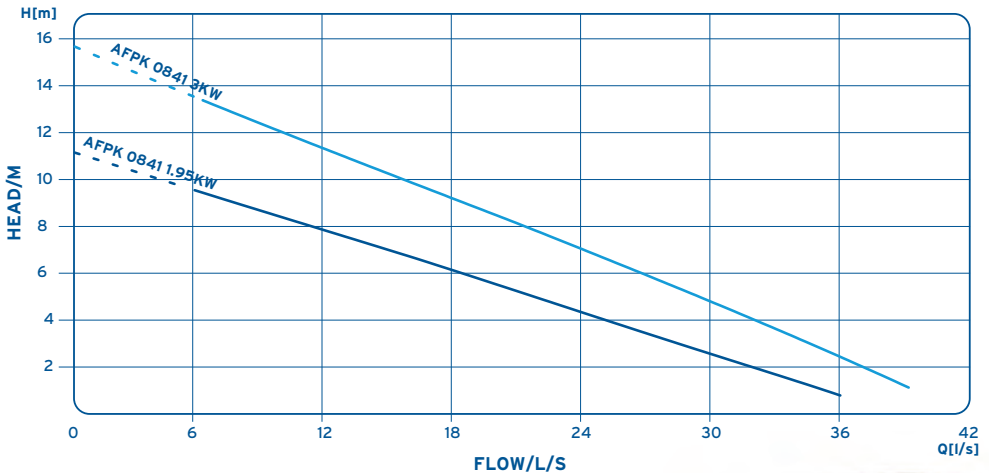

SYKES PUMPS 

sykes-pumps.com

or call us Free on **0800 211 611**

**SUBMERSIBLE
WASTEWATER**

AFPK0841

148

AFPK0832 & CS3102


PUMP PERFORMANCE

Model:	AFPK0832	CS3102-MT
Motor type (V):	415 (3-Phase) 50Hz	415 (3-Phase) 50Hz
Motor rating (Kw):	7	3
Running current: (Amps)	13.6	6.7
Running speed:	2900 rpm	1450rpm
Discharge port (mm):	80	100
Suction inlet port (mm):	80	100
Maximum solids (mm):	80	76
EX Rated:	Yes	No
Cooling jacket:	Yes	No

Dimensions (H x W) mm:

Guide rail option:	700 x 425	600 x 465
Weight (Kg):	120	107
Transportable option:	870 x 650	720x 620
Weight (Kg):	139	131

Please see the pump accessory section

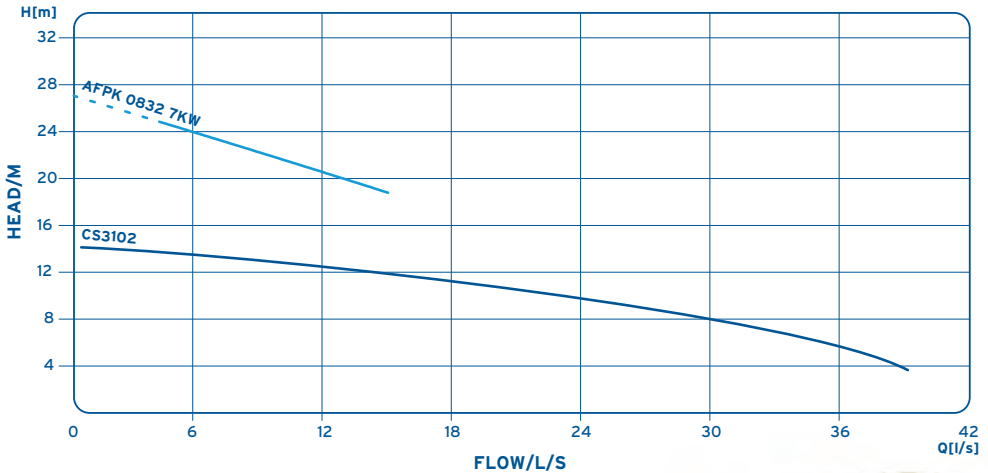

SYKES PUMPS 

sykes-pumps.com

or call us Free on **0800 211 611**

**SUBMERSIBLE
WASTEWATER**

AFPK0832
CS3102

150

AFPK 0842 & 0844




PUMP PERFORMANCE

Model:	AFPK 0842	AFPK 0844
Motor type (V):	415 (3-Phase) 50Hz	415 (3-Phase) 50Hz
Motor rating (Kw):	4	11
Running current: (Amps)	7.9	22.1
Running speed:	2900 rpm	2900 rpm
Discharge port (mm):	80	80
Suction inlet port (mm):	100	100
Maximum solids (mm):	50	45
EX Rated:	Yes	Yes
Cooling jacket:	Yes	Yes

Dimensions (H x W) mm:

Guide rail option:	655 x 455	740 x 375
Weight (Kg):	98	90
Transportable option:	795 x 675	915 x 775
Weight (Kg):	110	130

Please see the pump accessory section

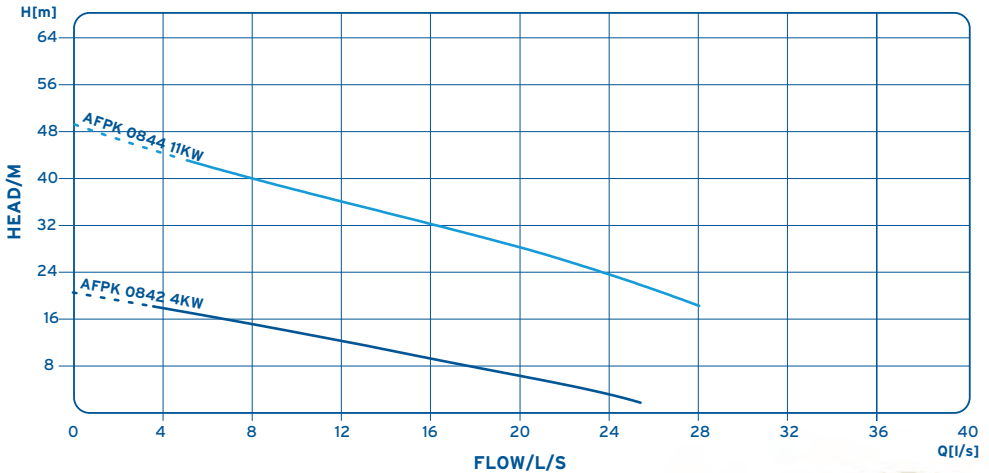

SYKES PUMPS 

sykes-pumps.com

or call us Free on **0800 211 611**

**SUBMERSIBLE
WASTEWATER**

AFPK 0842
AFPK 0844

152

XFP80E CB1.3



PUMP PERFORMANCE

Model: XFP80E CB1.3

Motor type (V): 415

Motor rating (Kw): 11

Max power input (Kw): 12.1

Running current: 20.1 (Amps)

Discharge spigot: 3"

Maximum solids (mm): 45

EX Rated: Yes

Cooling jacket: Yes

Dimensions (mm):

Guide rail option: Height 795

Maximum Width 420

Minimum Width 335


Free standing: Height 900

Maximum Width 690

Minimum Width 450

Weight (Kg): 175

Please see the pump accessory section

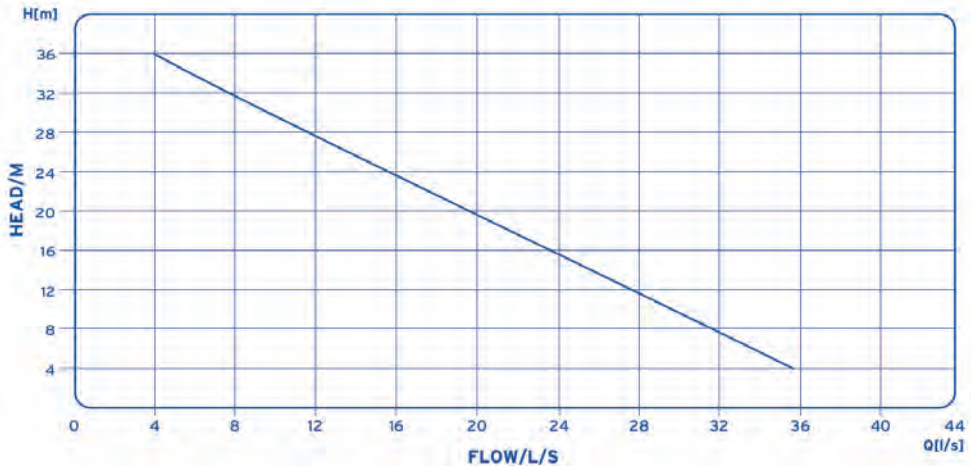

SYKES PUMPS 

sykes-pumps.com

or call us Free on **0800 211 611**

**SUBMERSIBLE
WASTEWATER**

XFP80E CB1.3

154



Please see the pump accessory section




PUMP PERFORMANCE

Model:	AFPK1042	AFPK1042
Motor type (V):	415 (3-Phase) 50Hz	415 (3-Phase) 50Hz
Motor rating (Kw):	4	6
Running current: (Amps)	8.8	12.5
Running speed:	1450 rpm	1450 rpm
Discharge port (mm):	100	100
Suction inlet port (mm):	100	100
Maximum solids (mm):	100	100
EX Rated:	Yes	Yes
Cooling jacket:	Yes	Yes

Dimensions (H x W) mm:

Guide rail option:	735 x 455	735 x 455
Weight (Kg):	121	125
Transportable option:	870 x 750	870 x 750
Weight (Kg):	141	144

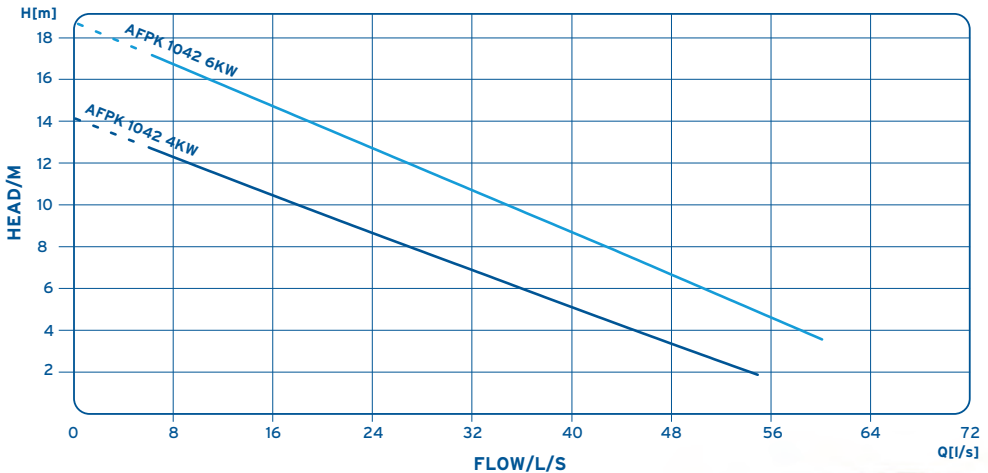


XFP100E CB1.1 & 1.3



PUMP PERFORMANCE

Model:	XFP100E CB1.1	XFP100E CB1.3
Motor type (V):	415	415
Motor rating (Kw):	9	6
Max power input (Kw):	9.9	6.7
Running current: (Amps)	18.1	13.6
Discharge spigot:	4"	4"
Maximum solids (mm):	80	80
EX Rated:	Yes	Yes
Cooling jacket:	Yes	Yes
Dimensions (mm):		
Guide rail option:		
Height	835	765
Maximum Width	510	510
Minimum Width	385	385
Free standing:		
Height	905	835
Maximum Width	835	835
Minimum Width	490	490
Weight (Kg):	190	180

Please see the pump accessory section

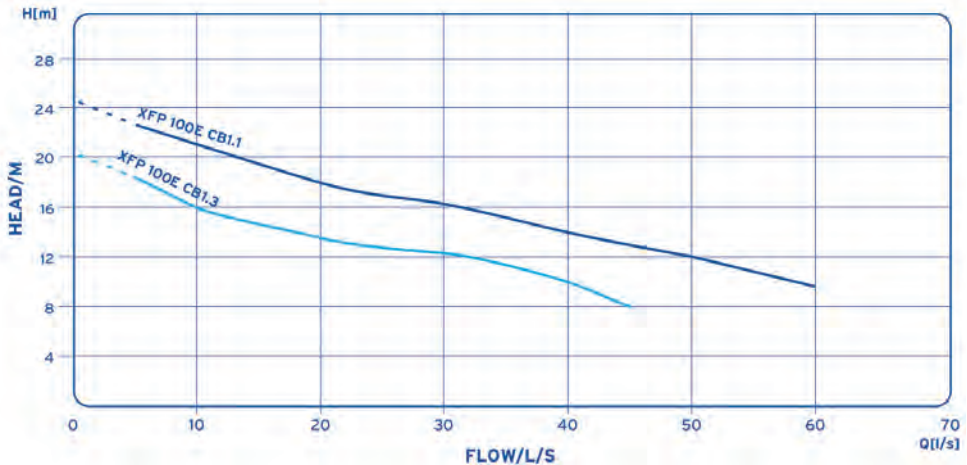

SYKES PUMPS 

sykes-pumps.com

or call us Free on **0800 211 611**

**SUBMERSIBLE
WASTEWATER**

XFP8100E, CB1.1
XFP8100E, CB1.3

158




PUMP PERFORMANCE

Model:	AFPK1043
Motor type (V):	415 (3-Phase) 50Hz
Motor rating (Kw):	7
Running current: (Amps)	13.6
Running speed:	2900 rpm
Discharge port (mm):	100
Suction inlet port (mm):	100
Maximum solids (mm):	55
EX Rated:	No
Cooling jacket:	Yes

Dimensions (H x W) mm:	
Guide rail option:	725 x 455
Weight (Kg):	125
Transportable option:	855 x 720
Weight (Kg):	124

Please see the pump
accessory section

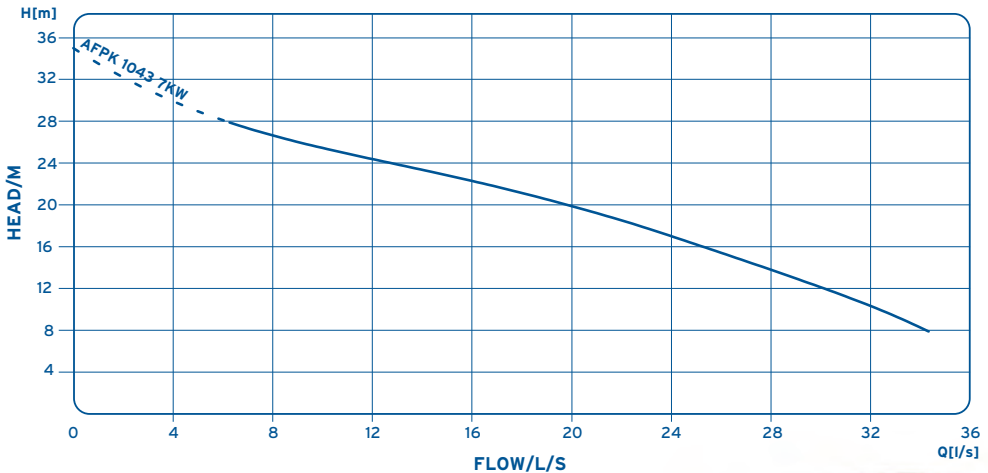

AFPK1045




PUMP PERFORMANCE

Model:	AFPK1045	AFPK1045
Motor type (V):	415 (3-Phase) 50Hz	415 (3-Phase) 50Hz
Motor rating (Kw):	11	18.5
Running current: (Amps)	22.1	35.6
Running speed:	1450 rpm	1450 rpm
Discharge port (mm):	100	100
Suction inlet port (mm):	150	150
Maximum solids (mm):	100	100
EX Rated:	No	No
Cooling jacket:	Yes	Yes

Dimensions (H x W) mm:

Guide rail option:	1145 x 550	1145 x 550
Weight (Kg):	310	320
Transportable option:	1295 x 940	1295 x 940
Weight (Kg):	330	340

Please see the pump accessory section

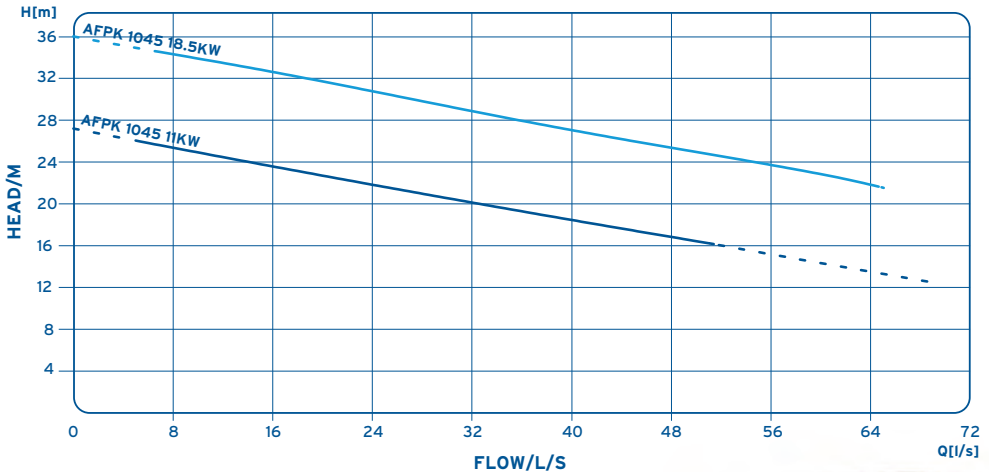

SYKES PUMPS 

sykes-pumps.com

or call us Free on **0800 211 611**

**SUBMERSIBLE
WASTEWATER**

AFPK1045

162

AFPK1048 & XFP101G

PUMP PERFORMANCE




Please see the pump accessory section



Model:	AFPK1048	XFP101G
Motor type (V):	415 (3-Phase) 50Hz	415 (3-Phase) 50Hz
Motor rating (Kw):	15	15
Running current: (Amps)	27.1	28
Running speed:	2900 rpm	2900 rpm
Discharge port (mm):	100	100
Suction inlet port (mm):	100	100
Maximum solids (mm):	50	50
EX Rated:	Yes	Yes
Cooling jacket:	Yes	Yes

Dimensions (H x W) mm:

Guide rail option:	1080 x 445	1212 x 496
Weight (Kg):	265	285
Transportable option:	1250 x 800	1380 x 800
Weight (Kg):	285	310

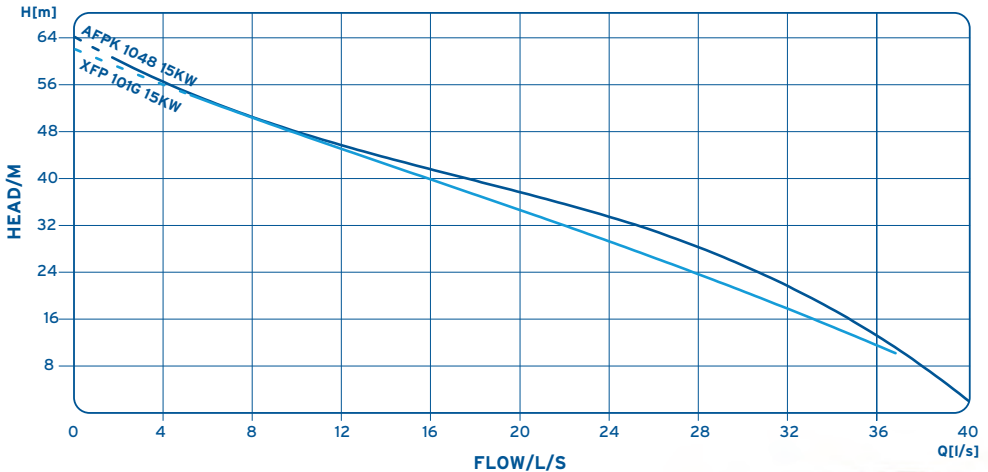

SYKES PUMPS 

sykes-pumps.com

or call us Free on **0800 211 611**

**SUBMERSIBLE
WASTEWATER**

AFPK1048
XFP101G

164

AFPK1049 & AFP1049



Please see the pump accessory section




PUMP PERFORMANCE

Model:	AFPK1049	AFP1049
Motor type (V):	415 (3-Phase) 50Hz	415 (3-Phase) 50Hz
Motor rating (Kw):	6	9
Running current: (Amps)	12.5	19.4
Running speed:	1450 rpm	1450 rpm
Discharge port (mm):	100	100
Suction inlet port (mm):	100	100
Maximum solids (mm):	100	100
EX Rated:	Yes	No
Cooling jacket:	No	No

Dimensions (H x W) mm:

Guide rail option:	720 x 475	770 x 475
Weight (Kg):	125	135
Transportable option:	890 x 855	940 x 855
Weight (Kg):	145	155

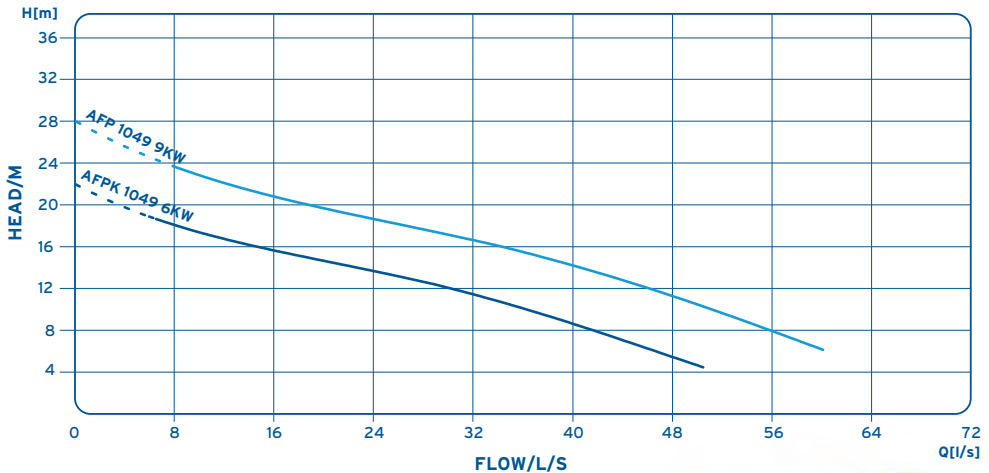

SYKES PUMPS 

sykes-pumps.com

or call us Free on **0800 211 611**

**SUBMERSIBLE
WASTEWATER**

AFPK1049
AFP1049

166

XFP100J CB2. 315 & 330




Please see the pump
accessory section



PUMP PERFORMANCE

Model:	XFP100J 315	XFP100J 330
Motor type (V):	415	415
Motor rating (Kw):	30	37
Max power input (Kw):	32.1	39.4
Running current: (Amps)	54.6	68.1
Discharge spigot:	4"	4"
Maximum solids (mm):	80	80
EX Rated:	Yes	Yes
Cooling jacket:	Yes	Yes
Dimensions (mm):		
Guide rail option:		
Height	1405	1485
Maximum Width	690	690
Minimum Width	520	520
Free standing:		
Height	1555	1635
Maximum Width	1000	1000
Minimum Width	600	600
Weight (Kg):	640	670

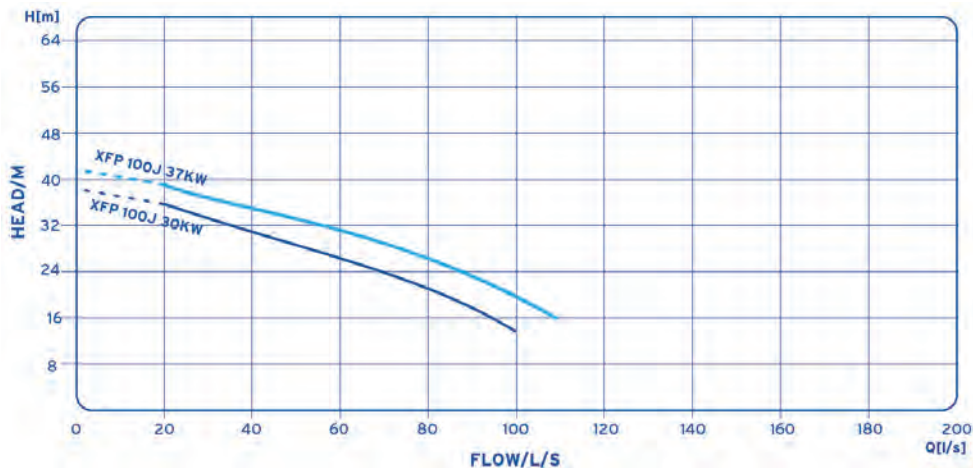

SYKES PUMPS 

sykes-pumps.com

or call us Free on **0800 211 611**

**SUBMERSIBLE
WASTEWATER**

XFP100J CB2. 315
XFP100J CB2. 330

168

XFP150G CB1.3



PUMP PERFORMANCE

Model: XFP150G CB1.3

Motor type (V): 415

Motor rating (Kw): 16

Max power input (Kw): 17.4

Running current:
(Amps) 33.1

Discharge spigot: 6"

Maximum solids (mm): 100

EX Rated: Yes

Cooling jacket: Yes

Dimensions (mm):

Guide rail option: 1300

Height 615

Maximum Width 495

Minimum Width

Free standing: 1470


Height 1000

Maximum Width 630

Minimum Width

Weight (Kg): 370

Please see the pump
accessory section

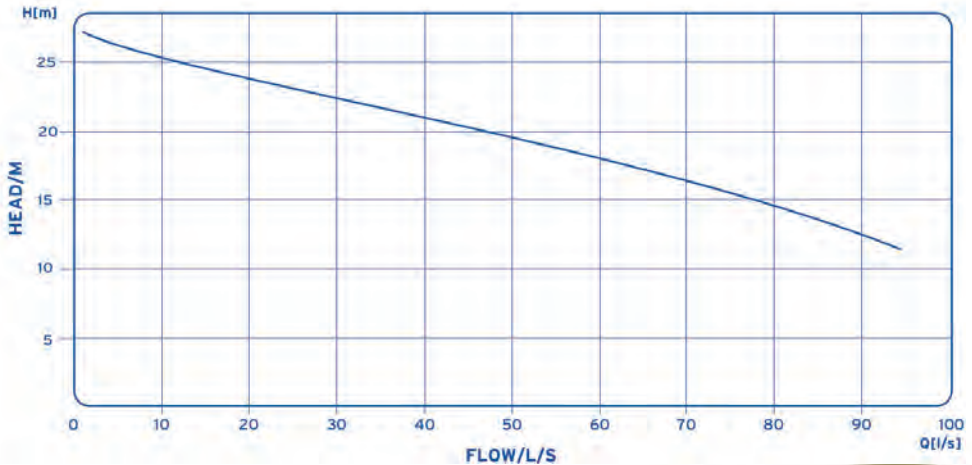

SYKES PUMPS 

sykes-pumps.com

or call us Free on **0800 211 611**

**SUBMERSIBLE
WASTEWATER**

XFP150G CB1.3

170

AFPK 1543




Please see the pump accessory section



PUMP PERFORMANCE

Model:	AFPI543	AFPK1543
Motor type (V):	415 (3-Phase) 50Hz	415 (3-Phase) 50Hz
Motor rating (Kw):	14	16
Running current: (Amps)	28.8	32
Running speed:	1450 rpm	1450 rpm
Discharge port (mm):	150	150
Suction inlet port (mm):	150	150
Maximum solids (mm):	100	100
EX Rated:	Yes	Yes/No
Cooling jacket:	Yes	Yes/No
Dimensions (H x W) mm:		
Guide rail option:	1155 x 585	1155 x 585
Weight (Kg):	340	340
Transportable option:	1325 x 998	1325 x 998
Weight (Kg):	370	370

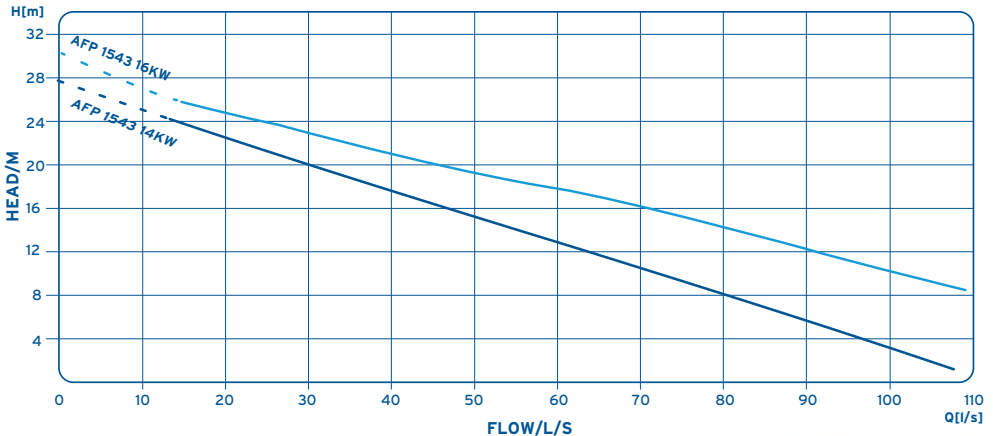

SYKES PUMPS 

sykes-pumps.com

or call us Free on **0800 211 611**

**SUBMERSIBLE
WASTEWATER**

AFPK 1543

172

AFPK1552 & XFP150M CB2.



Please see the pump accessory section




PUMP PERFORMANCE

Model:	AFPK1552	XFP150M CB2.
Motor type (V):	415	415
Motor rating (Kw):	55	55
Max power input (Kw):	58.1	58.1
Running current: (Amps)	94.4	94.1
Discharge spigot:	6"	6"
Maximum solids (mm):	77 X 52	77 X 52
EX Rated:	Yes	Yes
Cooling jacket:	Yes	Yes

Dimensions (H x W in mm):

Guide rail option:		
Height	1450	1740
Maximum Width	875	885
Minimum Width	705	710
Free standing:		
Height	1650	1940
Maximum Width	1260	1265
Minimum Width	850	850
Weight (Kg):	995	1020

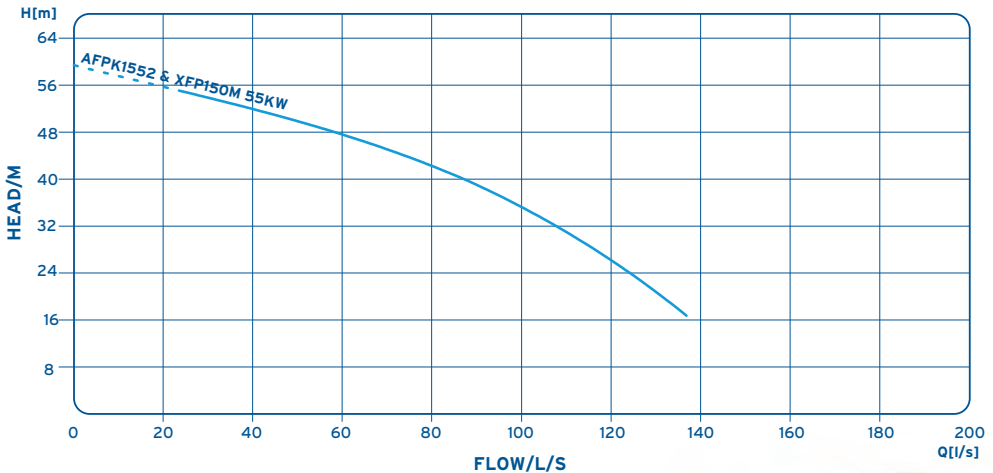

SYKES PUMPS 

sykes-pumps.com

or call us Free on **0800 211 611**

**SUBMERSIBLE
WASTEWATER**

AFPK1552
XFP150M.CB2.

174


XFP150M CB2.450



PUMP PERFORMANCE

Model:	XFP150M CB2.450
Motor type (V):	415
Motor rating (Kw):	75
Max Power input (Kw):	79
Running current: (Amps)	131
Discharge Spigot:	6"
Maximum solids (mm):	77 x 52
EX Rated:	Yes
Cooling jacket:	Yes
Dimensions (H x W) mm:	
Guide rail option:	1740 x 852 x 707
Free Standing:	1970 x 1265 x 800
Weight (Kg):	1065

Please see the pump
accessory section

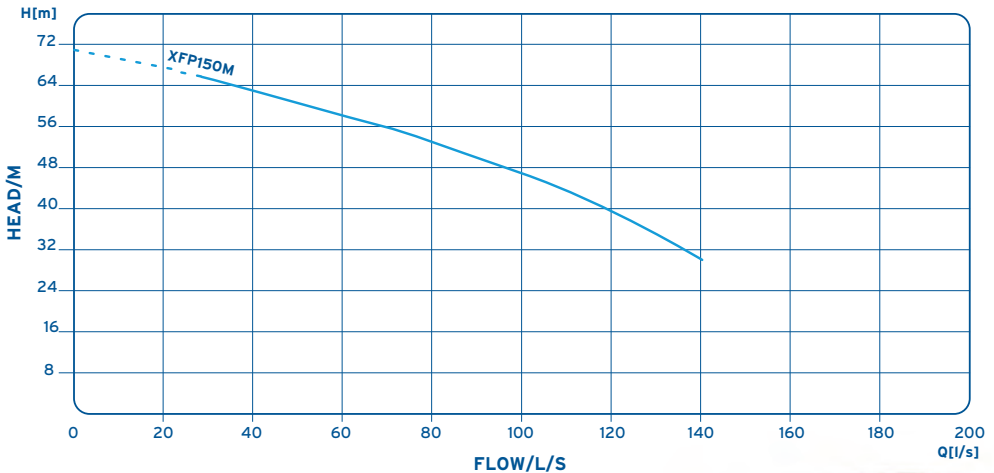

SYKES PUMPS 

sykes-pumps.com

or call us Free on **0800 211 611**

**SUBMERSIBLE
WASTEWATER**

XFP150M
CB2.450

176



PUMP PERFORMANCE

Model: AFPK1575

Motor type (V): 415
(3-Phase)
50Hz

Motor rating (Kw): 37

Running current: 69
(Amps)

Running speed: 1450 rpm

Discharge port (mm): 150

Suction inlet port (mm): 150

Maximum solids (mm): 100

EX Rated: Yes

Cooling jacket: Yes

Dimensions (H x W) mm:


Guide rail option: 1330 x 670

Weight (Kg): 582

Transportable option: 1485 x 1020

Weight (Kg): 612

Please see the pump
accessory section

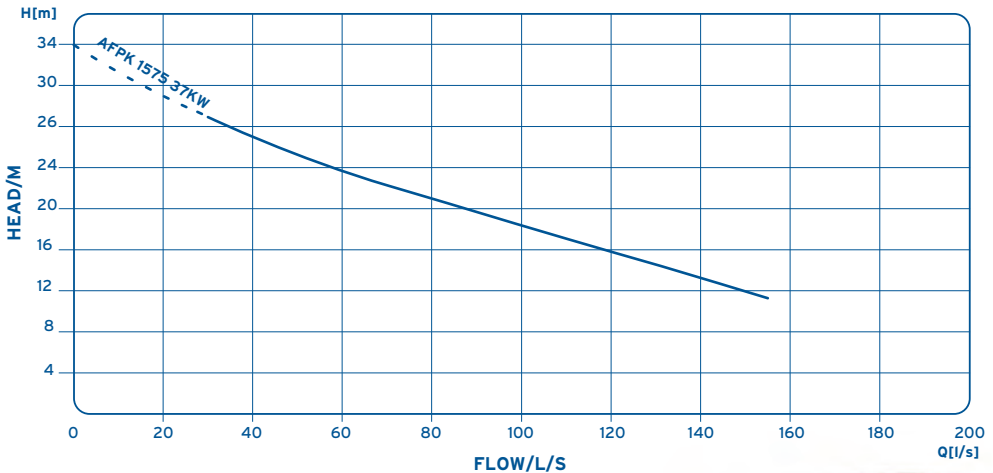

SYKES PUMPS 

sykes-pumps.com

or call us Free on **0800 211 611**

**SUBMERSIBLE
WASTEWATER**

AFPK1575

178

AFPK2045 & XFP200G



Please see the pump accessory section




PUMP PERFORMANCE

Model:	AFPK2045	XFP200G
Motor type (V):	415 (3-Phase) 50Hz	415 (3-Phase) 50Hz
Motor rating (Kw):	14	22
Running current: (Amps)	27.7	42.6
Running speed:	1450 rpm	1450 rpm
Discharge port (mm):	200	200
Suction inlet port (mm):	200	200
Maximum solids (mm):	125 x 100	125
EX Rated:	Yes	Yes
Cooling jacket:	Yes	Yes

Dimensions (H x W) mm:

Guide rail option:	1195 x 690	1388 x 690
Weight (Kg):	375	397
Transportable option:	1390 x 1210	1541 x 1150
Weight (Kg):	425	460

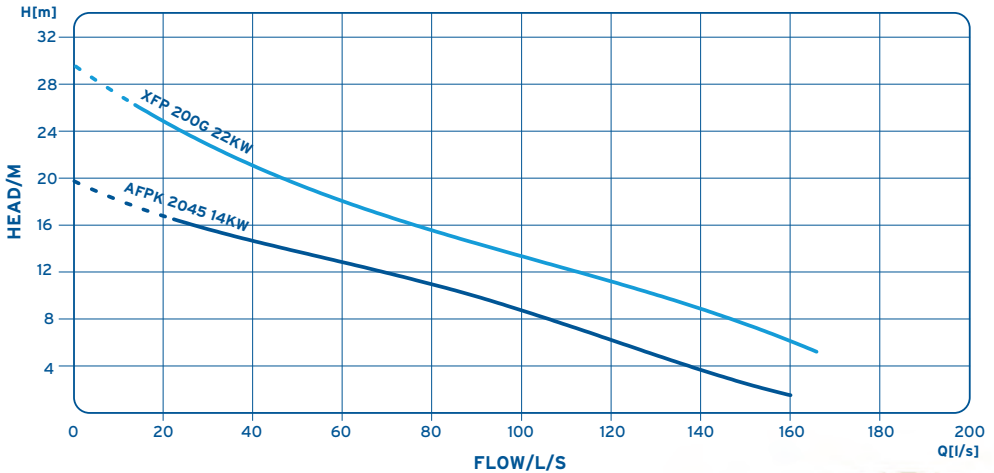

SYKES PUMPS 

sykes-pumps.com

or call us Free on **0800 211 611**

**SUBMERSIBLE
WASTEWATER**

AFPK2045
XFP200G

180




PUMP PERFORMANCE

Model:	AFPK2073
Motor type (V):	415 (3-Phase) 50Hz
Motor rating (Kw):	55
Running current: (Amps)	94
Running speed:	1450 rpm
Discharge port (mm):	200
Suction inlet port (mm):	200
Maximum solids (mm):	100
EX Rated:	Yes
Cooling jacket:	Yes

Dimensions (H x W) mm:

Guide rail option:	1490 x 775
Weight (Kg):	900
Transportable option:	1520 x 1235
Weight (Kg):	940

Please see the pump
accessory section

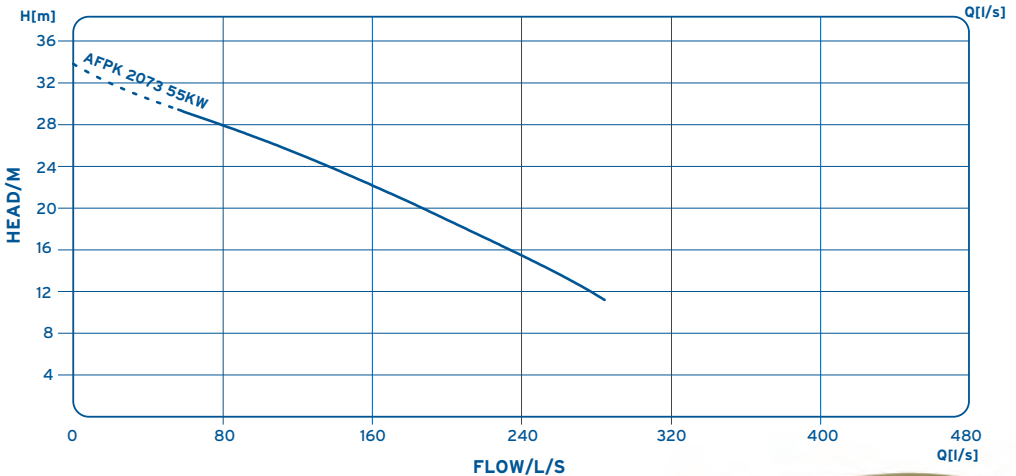




Please see the pump accessory section



PUMP PERFORMANCE

Model:	CS3152-LT
Motor type (V):	415 (3-Phase) 50Hz
Motor rating (Kw):	8.8
Running current: (Amps)	19
Running speed:	1450 rpm
Discharge port (mm):	250
Suction inlet port (mm):	250
Maximum solids (mm):	102 x 102
EX Rated:	No
Cooling jacket:	No
Dimensions (H x W) mm:	
Guide rail option:	1055 x 765
Weight (Kg):	300
Transportable option:	1255 x 1315
Weight (Kg):	360

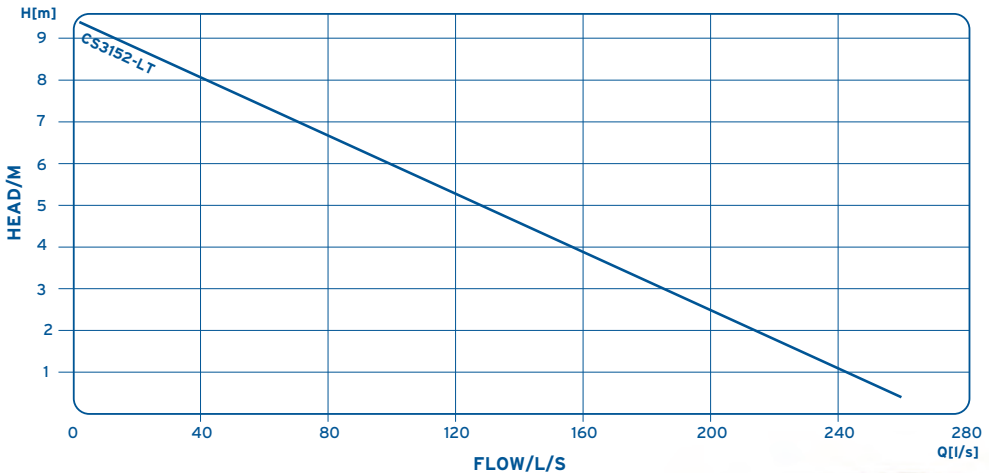

SYKES PUMPS 

sykes-pumps.com

or call us Free on **0800 211 611**

**SUBMERSIBLE
WASTEWATER**

CS3152-LT

184

XFP301M




Please see the pump accessory section



PUMP PERFORMANCE

Model:	XFP301M
Motor type (V):	415 (3-Phase) 50Hz
Motor rating (Kw):	75
Running current: (Amps)	140
Running speed:	980 rpm
Discharge port (mm):	300
Suction inlet port (mm):	300
Maximum solids (mm):	127 x 110
EX Rated:	Yes
Cooling jacket:	Yes
Dimensions (H x W) mm:	
Guide rail option:	1955 x 1095
Weight (Kg):	1361
Transportable option:	2155 x 1850 x 910
Weight (Kg):	1470

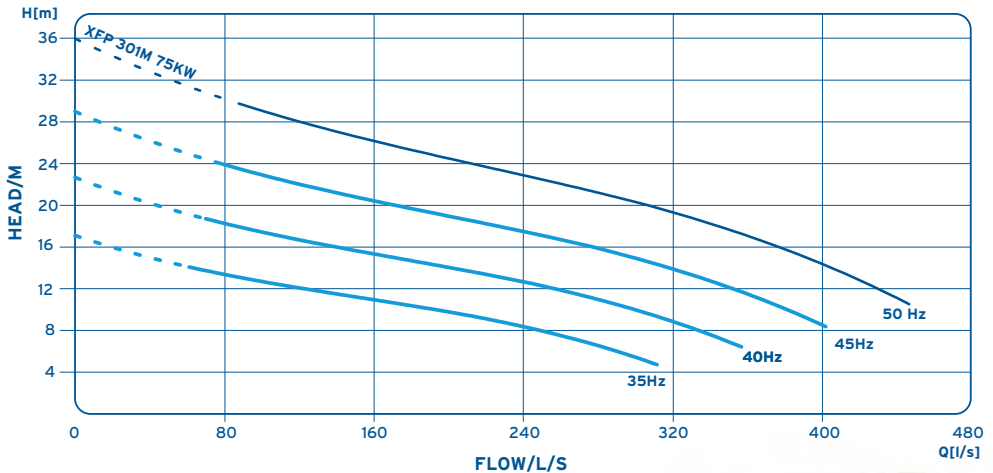

SYKES PUMPS 

sykes-pumps.com

or call us Free on **0800 211 611**

**SUBMERSIBLE
WASTEWATER**

XFP301M

186



When a pump fails, it is likely the sump in which it is installed is full and thus restricts accessibility for repair works. Guide rail installation is typically used on pumping stations to facilitate removal of the pump without having to unbolt any flanges or directly see the application.

A pump is lifted up the guide rail - normally on a pre-installed chain - to the water's surface guaranteeing safe operation at all times. When reinstalling, the pump is simply lowered down the guide rail onto the fixed discharge bend at the bottom of the sump. The pump is locked into position by a lip on the guide claw, and this seals the discharge under the pump's own weight.

A large proportion of customers believe this configuration automatically ties them to the original manufacturer when temporary hires or replacements are sought. However, this is not the case. At Sykes Pumps we stock an expansive range of guide rail adaptors within our fleet to connect our units to those of any other manufacturer.

Made from hard-wearing ductile iron or galvanised steel, the brackets are durable enough to cope with the rigours of the pump hire market and are attached to pumps via simple bolted flange.

Being compatible with every pump manufacturer means with Sykes Pumps you can be assured that we will always have the correct fit on every project. Supported by a far-reaching national depot network and a genuine 24/7 service, clients can rely on us to provide guidance whenever the need surfaces.

CONTROL PANELS

Along with a comprehensive range of electric submersible pumps, Sykes also offer a full selection of control panels. Panels enable the user to leave pumps unattended for long periods whilst ensuring safety, efficiency and wear reduction on the pump.

For pumps of up to 11kw the PLC range of panels can be used (available in 1 or 3 phase). Built in a strong robust frame the panels include: DOL Starter, over-loads, run and tripped lamps, door interlocking isolator, RCCD, float switch level control and on-off-auto selector. Alternatively, Variable 1 to 15kW panels can be used.

Larger pumps use soft start control panels to ensure smooth starting from the minimum of mains or generator power supply. This gives the user considerable fuel savings. Robust free standing panels use a variable soft starter and include: over-loads, run and tripped lamps, door interlocking isolator, RCCD, float switch level control and on-off-auto selector. Alternatively, variable 18 to 56kW panels can be used.

For specialist applications, Variable Speed, Dual or Multi-pump panels are available. Telemetry, high level alarms and ultrasonic level controls can also be provided.



STANDARD PLC PANELS



For Pumps up to 11kw the PLC, DOL range of Panels can be used.

- These are available in 1 Phase or 3 phase
- Strong robust frame
- DOL Starter
- Overloads
- Run and Tripped lamps
- Door interlocking isolator
- RCCD Fitted as standard
- Float Switch Level Control
- On - OFF Auto selector
- Mains Terminal
- Plug and Play

For Specialist applications Dual or Multi Pump Panels are Available. Telemetry, High Level Alarms and Ultrasonic Level Controls can also be provided.

For Pumps which require a greater capacity our Range of soft start panels ensure smooth starting From the minimum mains or generator power supply.

- Robust free standing panel
- Variable Soft Starter
- Overloads
- Run and Tripped lamps
- Door interlocking isolator
- RCCD Fitted as standard
- Float Switch Level Control
- On - OFF Auto selector
- Mains Terminal
- Emergency stop pushbutton
- Removable cable gland plates

SYKES PUMPS 

sykes-pumps.com

or call us Free on **0800 211 611**

**CONTROL
PANELS**

STANDARD PLC
PANELS

192

VARIABLE DOL PANEL 1 - 15KW



EXTERNAL FEATURES

- Controls and protects from 1kw to 15kw
- For internal and external applications
- Lifting hook
- Rain canopy
- Socket for motor connection
- Sockets for float switch or ultrasonic level control
- 2 line lcd digital display
- Local / remote selector switch
- Emergency stop pushbutton
- Load break isolator
- Rust resistant panel
- Rigid free standing frame
- Plug and Play

INTERNAL FEATURES

- DOL starter unit
- Rotary kw overload selector
- Up to 16 overload settings
- Earth leakage protection
- Control terminals
- Motor terminals
- Float switch terminals
- Emergency stop facility
- Mains terminals
- Pre-drilled gland plate
- Motor overheat protection
- Inter panel interlock system
- Provision for telemetry
- Door close security system

SYKES PUMPS 

sykes-pumps.com

or call us Free on **0800 211 611**

**CONTROL
PANELS**

VARIABLE DOL
PANEL 1-15KW

194



EXTERNAL FEATURES

- Controls and protects from 18kw to 56kw
- For internal and external applications
- Lifting hook
- Rain canopy
- Float switch or ultrasonic level control
- 2 line lcd digital display
- Local / remote selector switch
- Emergency stop pushbutton
- Isolator
- Rust resistant panel
- Rigid free standing frame
- Plug and Play

INTERNAL FEATURES

- Soft start unit
- Main contactor
- Bypass contactor
- Earth leakage protection
- Control terminals
- Motor terminals
- Transformer
- Mains terminals
- Pre-drilled gland plate
- Motor overheat protection
- Provision for telemetry
- Emergency stop facility
- Door close security system

VARIABLE SPEED DRIVE PANEL



EXTERNAL FEATURES

- Padlockable 'door shut' overclasp
- Control and protect pumps 15kw to 75kw
- For internal and external applications
- Lifting hook
- Rain canopy
- Float switch control
- Isolator
- LCD digital display
- Potentiometer
- Emergency stop
- Running and tripped led
- Start / stop Pushbutton
- Rust resistant panel
- Rigid free standing frame
- Plug and Play

INTERNAL FEATURES

- Variable speed drive
- Built in fan and filter
- Main contactor
- Mains and motor terminals
- Control terminals
- Seal leak detection
- 4-20ma speed control (auto)
- Potentiometer speed control (hand)
- 'Door closed' security system
- Fuse protection for control circuit
- Provision for telemetry
- Provision for ultra-sonic input

SYKES PUMPS 

sykes-pumps.com

or call us Free on **0800 211 611**

**CONTROL
PANELS**

VARIABLE SPEED
DRIVE PANEL

198

AIR PUMPS



Sykes Pumps range of air operated double diaphragm pumps, are available with a combination of aluminium, cast iron, or stainless steel wetted parts and centre sections with a choice of elastomer option materials.

Options are also available for the specific transfer of aggressive liquids. pump sizes range from 50mm to 75mm.



PUMP PERFORMANCE

BEAVER 50: Max head: 89 m
Max flow: 8.5 l/s
Max solid: 6 mm

Weight (Kg): 41

Dimensions: 453 x 352 x 571
(L x W x H) mm


Pipe connections: 2" BSP

Max Air Inlet Pressure (psi): 125

Max Air Inlet Consumption: 140
(cfm)

Note: Side discharge and centre discharge available

Please see the pump accessory section

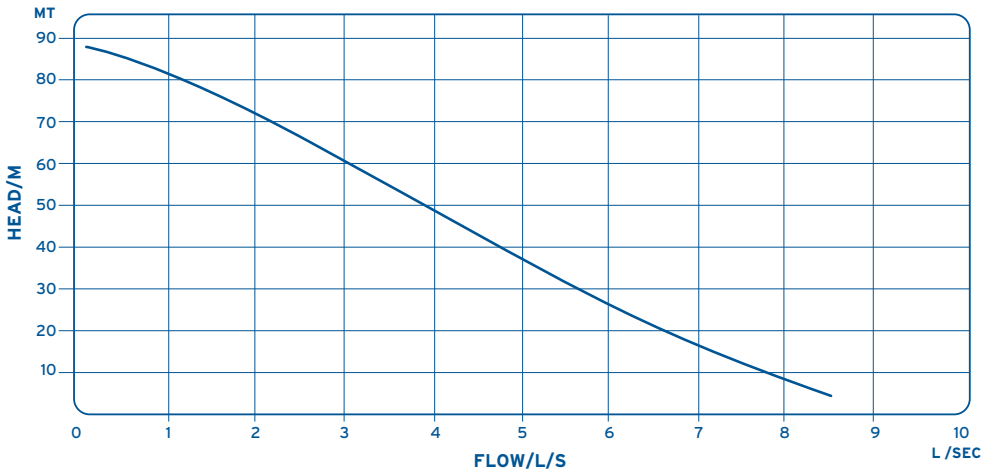




PUMP PERFORMANCE

BEAVER 75:	Max head: 89 m
	Max flow: 13.5 l/s
	Max solid: 10 mm
Weight (Kg):	83.7
Dimensions: (L x W x H) mm	575 x 460 x 746
Motor:	Efficient air motor Automatic overspeed control
Pipe connections:	3" BSP or 3" Bauer
Max Air Inlet Pressure (psi):	125
Max Air Inlet Consumption: (cfm)	160

Note: Side discharge and centre discharge available

Please see the pump accessory section

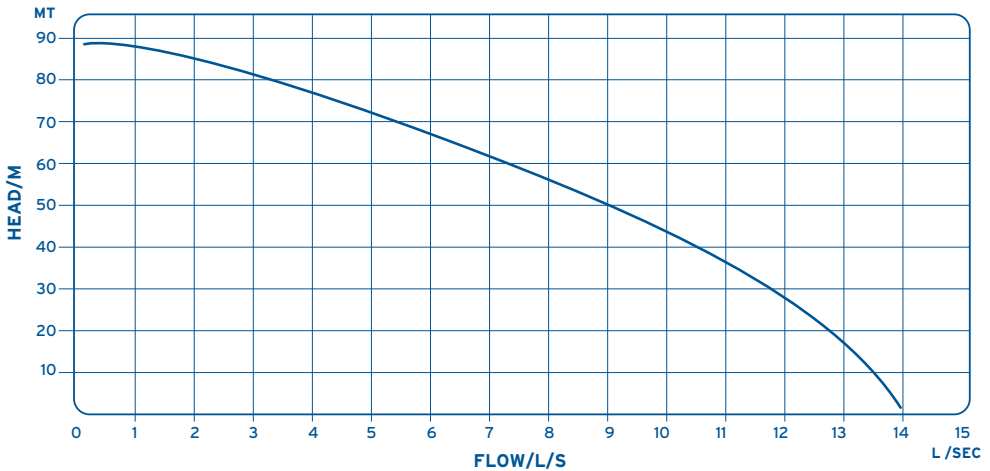

ACCESSORIES



The diversity of duties encountered by Sykes Pumps demands an equally versatile and durable range of hoses and accessories. The products shown on the following pages have been manufactured to conform to the rigorous standards established by Sykes Pumps engineering department and are readily available from the company's nationwide network of depots in the U.K.

LAYFLAT HOSE



SPECIFICATION

Diameter (mm):	50	80	100	150	200
Length (m):	Yes	Yes	Yes	Yes	Yes
25 (m):	Yes	Yes	Yes	Yes	Yes
50 (m):	Yes	Yes	Yes	Yes	Yes
100(m):	Yes	Yes	Yes	Yes	No
Complete: (with bauer coupling)	Y/N	Y/N	Y/N	Y/N	Y/N
Pressure (Bar):	3	3	3	2.5	2
Weight (Kg):					
25:	6	9	11	23	32
50:	12	18	22	46	63
100:	24	34	45	96	
Weight (Kg): c/w Fittings					
25:	7	13	16	34	47
50:	13	22	27	57	78
100:	25	38	50	107	

POLY PIPE LDPE



SPECIFICATION

Diameter (mm):	50	80	100	150	200
Length (m):	6	6	6	6	6
Weight (Kg):	5	16	20	28	55
Pressure (Bar):	5	5	4	4	4

SYKES PUMPS 

sykes-pumps.com

or call us Free on **0800 211 611**

ACCESSORIES

GALVANISED STEEL PIPE



SPECIFICATION

Diameter (mm):	80	100	150	200	300
Length (m):	6	6	6	6	3
Weight (Kg):	11	19	34	46	55
Pressure (Bar):	10	10	10	10	10

FLEXIBLE BAUER WIRE ARMOURED SUCTION HOSE



SPECIFICATION

Diameter (mm):	50	80	100	150	200	300
Length (m):	6	6	6	3	3	3
Weight (Kg):	11	21	29	37	66	157
Pressure (Bar):	9	9	7	6	5	3.5

SYKES PUMPS 

sykes-pumps.com

or call us Free on **0800 211 611**

ACCESSORIES

HIGH PRESSURE WIRE ARMoured FLANGED NP16 HOSE

SPECIFICATION

Diameter (mm):	80	100	150	200	300
Length (m):	3	3	3	3	3
Weight (Kg):	22	30	61	103	189
Pressure (Bar):	16	16	16	16	16



ADDITIONAL



Intakes:	50 - 300mm
Flanged Bauer Fittings:	50 - 300mm
Bauer Hosetails:	50 - 300mm
Gate Valves:	50 - 300mm
Non Return Valves:	50 - 300mm
Flanged Reducers/Enlargers:	50 - 300mm
Bauer Reducers/Enlargers:	50 - 300mm
'Y' Pieces:	50 - 300mm
'T' Pieces:	50 - 300mm
45° Bauer bends:	50 - 300mm
90° Bauer bends:	50 - 300mm

SYKES PUMPS 

sykes-pumps.com

or call us Free on **0800 211 611**

ACCESSORIES




The safe transportation and storage of fuel, especially in environmentally sensitive areas, is an increasing concern for all. Sykes offers a purpose built range of fully bunded fuel tanks for hire, with a capacity range from 1000 - 3000 Litres. Fully compliant and tested to ADR and UN requirements for IBC (Intermediate Bulk Container) standards. All manufactured under ISO 9001 : 2000 requirements.

Sykes comprehensive fuelling and refuelling service for all installations is offered from our nationwide depot network.

SPECIFICATION

Capacity (litres):	1000	2000	2800	3000
Length (mm):	1150	2300	2300	2300
Width (mm):	1150	1150	1550	1550
Height (mm):	1320	1320	1320	1320
Weight Empty (Kg):	514	865	900	992
Weight Full (Kg):	1377	2665	3420	3692

SETTLEMENT TANKS

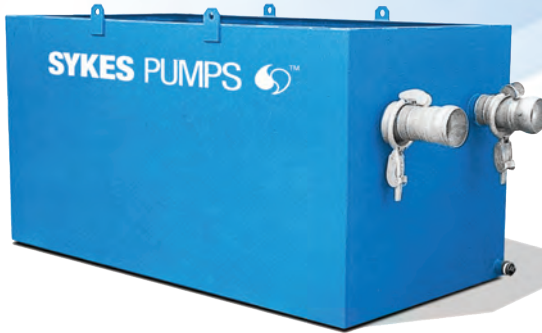

SPECIFICATION

Capacity (litres):	3000
Length (mm):	2400
Width (mm):	1200
Height (mm):	1200
Weight Empty (Kg):	900

Sykes offer a range of settlement tanks to be used on the discharge side of any pumpset. The tanks are specially designed to prevent silt and fines being discharged into the water course or drains. Each tank is provided with a series of weir plates, Bauer quick release couplings, lifting eyes and drain plugs.

*Must not be lifted full.



SETTLEMENT TANK HD

SPECIFICATION

Capacity (litres):	3000
Length (mm):	2400
Width (mm):	1220
Height (mm):	1460
Weight Empty (Kg):	805

Sykes offer a range of settlement tanks to be used on the discharge side of any pumpset. The tanks are specially designed to prevent silt and fines being discharged into the water course or drains. Each tank is provided with a series of weir plates, Bauer quick release couplings, lifting eyes and drain plugs.

*Must not be lifted full.

SYKES PUMPS 

sykes-pumps.com

or call us Free on **0800 211 611**

ACCESSORIES

SETTLEMENT TANKS

216

SYKES PUMPS SILT AWAY

SPECIFICATION

Settlement area:	10 m ³
Water capacity:	5000 litres
Weight empty :	1196 kg
Dimensions (L x W x H):	2320 x 2320 x 2015 mm

The Silt Away unit has been specifically designed to separate suspended solids and sediment from water pumped from various ground sources, including construction sites, rivers and drains.

Pumped water passes through the Siltaway filters via a Lamella platebox, allowing solids contained in water to drop into a discharge chamber below.



ROAD RAMPS

SPECIFICATION

Dimensions: (L x W x H) mm	3920 x 700 x 315
Weight (kg):	157

Road ramps provide safe positioning of pipe work across roads and pathways, where vehicular access is required and disruption to the area needs to be kept to a minimum.

- *Suitable for flat roads only.
- *Max 16 Ton Vehicle weight.



SYKES PUMPS 

sykes-pumps.com

or call us Free on **0800 211 611**

ACCESSORIES

SILT AWAY
ROAD RAMPS

218

INTERCEPTOR DRIP TRAYS

SPECIFICATION

Dimensions: (L x W x H) mm	1525 x 2440 x 303
Capacity:	860 litres
Compatible pumps:	2" up to 6"
Weight dry (kg):	280



Interceptor drip trays can be provided for all pumps to avoid environmental pollution due to fuel or oil spillage when refuelling or maintaining the pumpset.

Even if the pump has a built in drip tray an additional full length tray gives extra protection. Environmental authorities would insist on using interceptor drip trays whilst working close to waterways or when there is a risk of ground water pollution.

This simple yet highly effective design which negates the need for filters or chemicals, giving you instant environmental protection.



VENTURI

Sykes Venturi aerators can be supplied in either diesel or electric options and are easily installed, directly on to submersible pumps and discharge pipework, to aid aeration and mixing, for the water industry. They are also useful when coupled to a Sykes diesel driven pump to oxygenate fishing lakes that have succumbed to adverse weather conditions or pollution.

SYKES PUMPS 

sykes-pumps.com

or call us Free on **0800 211 611**

ACCESSORIES


DRIP TRAYS
VENTURI

220

INFORMATION

The following pages have been prepared as an easy reference guide to other useful supporting information that may not have been covered earlier in this document.

Whilst every care is taken to see that the information given in this document is correct and up to date it is not intended to form part of any contract or give rise to any collateral liability, which is hereby specifically excluded.

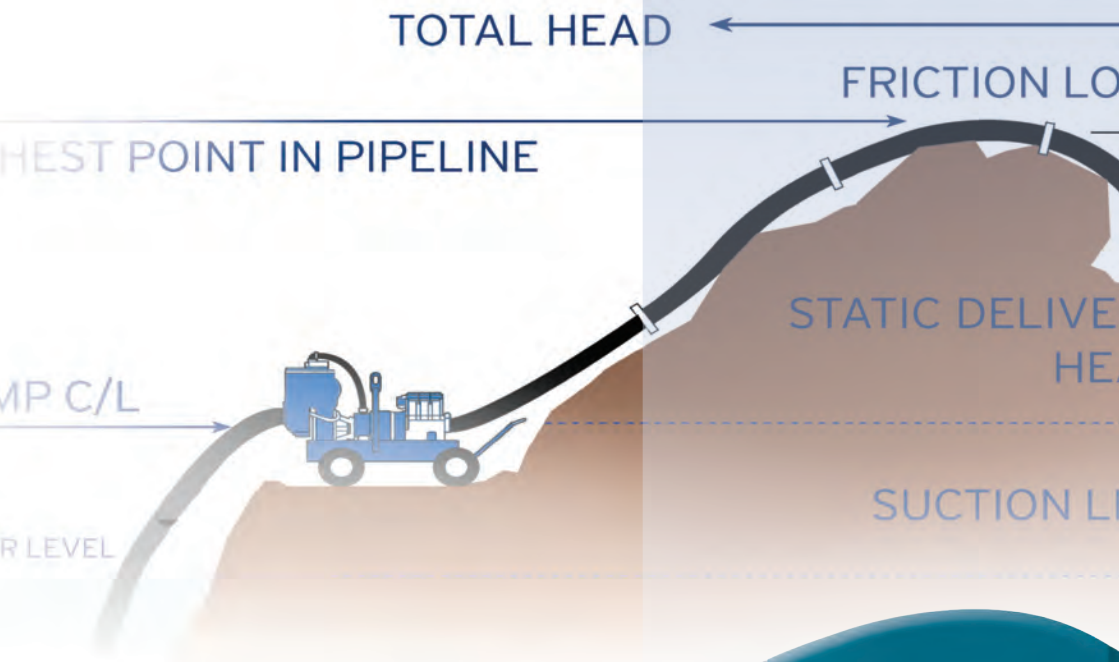

FLANGE SIZES

Imperial Flanges BS10 in Inches


Nominal Bore	Table	Flange Diameter	P.C.D	Bolt Dimensions	Number of Holes	Flange Thickness
1	D	4 ½	3 ¼	1 x ½	4	⅜
1	E	4 ½	3 ¼	1 ¼ x ½	4	⅝
1½	D	5 ¼	3 ⅞	1 ¼ x ½	4	¼
1½	E	5 ¼	3 ⅞	1 ½ x ½	4	11/32
2	D	6	4 ½	1 ½ x ⅝	4	⅝
2	E	6	4 ½	1 ¾ x ⅝	4	⅝
3	D	7 ¼	5 ¾	1 ¾ x ⅝	4	⅝
3	E	7 ¼	5 ¾	1 ¾ x ⅝	4	7/16
4	D	8 ½	7	1 ¾ x ⅝	4	⅝
4	E	8 ½	7	2 x ⅝	8	½
6	D	11	9 ¼	2 x ⅝	8	½
6	E	11	9 ¼	2 ½ x ¾	8	11/16
8	D	13 ¼	11 ½	2 x ⅝	8	½
8	E	13 ¼	11 ½	2 ½ x ¾	8	¾
10	D	16	14	2 ½ x ¾	8	⅝
10	E	16	14	2 ¾ x ¾	12	7/8
12	D	18	16	2 ½ x ¾	12	¾
12	E	18	16	3 ¼ x ¾	12	1

Metric Flanges BS4504 in Millimeters


Nominal Bore	NP	Flange Diameter	P.C.D	Bolt Dimensions	Number of Holes	Flange Thickness
25	10	115	85	12 x 50	4	16
25	16	115	85	12 x 50	4	16
40	10	150	110	16 x 60	4	16
40	16	150	110	16 x 60	4	16
50	10	165	125	16 x 60	4	18
50	16	165	125	16 x 60	4	18
80	10	200	160	16 x 65	8	20
80	16	200	160	16 x 65	8	20
100	10	220	180	16 x 70	8	20
100	16	220	180	16 x 70	8	20
150	10	285	240	20 x 70	8	22
150	16	285	240	20 x 70	8	22
200	10	340	295	20 x 80	8	24
200	16	340	295	20 x 90	12	24
250	10	395	350	20 x 80	12	26
250	16	405	355	24 x 90	12	26
300	10	445	400	20 x 80	12	26
300	16	460	410	24 x 90	12	28

How to approximate L/s flow from pipe by measuring "X"

Full Pipe

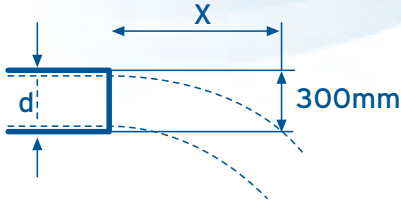

Partially Full Pipe

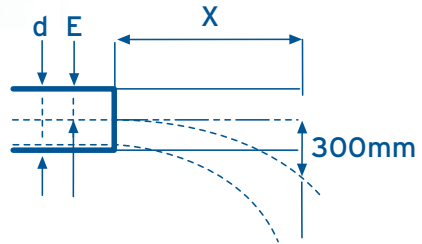

Formulae

Divide "E" by "d" for factor.

Multiply flow for full pipe of "d" diameter (Table 1) by % from Table 2.

E - Measure of empty portion of pipe

d - Measure of inside diameter of full pipe

Flow = L/s

Table 1
Pipe Diameter

Horizontal Distance (X)	50	70	100	150	200	250	300
300	2.6	5.7	9.5	22.2	38.5	60.5	87.0
350	3.0	6.6	11.5	25.8	44.9	70.7	101.0
400	3.5	7.5	13.0	29.6	51.3	80.8	116.0
450	3.9	8.5	14.6	33.3	57.7	90.9	128.0
500	4.3	9.5	16.3	36.4	64.2	101.0	145.0
550	4.7	10.4	17.9	40.1	70.6	111.0	159.0
600	5.2	11.4	19.5	44.5	77.1	121.0	174.0
650	5.6	12.3	21.2	48.1	83.4	131.0	188.0
700	6.1	13.3	22.8	51.8	89.8	141.0	202.0
750	6.4	14.2	24.4	55.5	96.4	151.0	215.0

Table 2
Flow from partially filled pipes

%	Factor	%	Factor
10	0.95	50	0.50
20	0.88	60	0.38
25	0.81	65	0.38
30	0.75	70	0.25
35	0.69	80	0.14
40	0.63	90	0.05
45	0.58	100	0.00

Losses in m/100 or ft/100

IGPM	l/s	2" 50mm	3" 80mm	4" 100mm	6" 150mm	8" 200mm	10" 250mm	12" 300mm	m ³ /hr
50	4	10	1.4	0.5					14
75	6	20	3	0.8					20
100	8	35	5	1.3					27
150	11		12	2.4					41
200	15		18	4.5	0.6				55
300	23		40	10	1.2	0.4			82
400	30			18	2.2	0.7			109
500	38			28	3.5	1.1	0.3		137
600	45			38	4.5	1.5	0.5		164
700	53				6.5	2	0.7		191
800	61				8	2.7	0.8		219
900	68				10	3.4	1	0.4	246
1000	76				13	4	1.4	0.5	273
1200	91				18	6	2	0.8	328
1400	106				28	8	3	1	383
1600	121					11	4	1.5	437
1800	136					14	4.5	2	492
2000	152					17	5	2.5	546
2500	189					25	9	4	683
3000	227						12	5	820
4000	303						21	8	1093
5000	379							13	1366

Friction Loss

In general, add 10% for sewage, and 2% per year for age of pipe.

Loss of head due to fittings, expressed in pipe diameters, giving an equivalent length of straight pipe.

Bell mouth = 12

Sluice valve = 6

Heavy non return valve = 60

Short radius bend = 30

45 degree bend = 15

Radial tee = 45

Footvalve and strainer = 75

Light non return valve = 36

Elbow = 75

Long radius bend = 18

Equal tee = 90

Taper piece = 45

Effect of change in speed on pump performance.

There exist certain relationships which allow the performance of a centrifugal pump to be predicted for another speed when the performance for a given speed is known.

When the speed of a centrifugal pump changes, the throughput at any given point varies directly to the speed, the head varies to the square of the speed and power varies to the cube of the speed. These relations are termed the affinity laws and can be expressed as follows.

$$\begin{array}{ll} Q \propto N \text{ where } Q = \text{throughput} & H \propto N^2 \text{ where } H = \text{head} \\ P \propto N^3 \text{ where } P = \text{absorbed power} & N = \text{speed rpm} \end{array}$$

Then for a given change in speed, taking suffix 1 as relating to known performance, and suffix 2 as the performance which is required we have:

$$\begin{array}{ll} \frac{Q_2}{Q_1} = \frac{N_2}{N_1} & \text{therefore } Q_2 = \frac{Q_1 \times N_2}{N_1} \\ \text{and } \frac{H_2}{H_1} = \left(\frac{N_2}{N_1}\right)^2 & \text{therefore } H_2 = H_1 \left(\frac{N_2}{N_1}\right)^2 \\ \text{and } \frac{P_2}{P_1} = \left(\frac{N_2}{N_1}\right)^3 & \text{therefore } P_2 = P_1 \left(\frac{N_2}{N_1}\right)^3 \end{array}$$

Effect of change in diameter of impeller.

The performance of a centrifugal pump can be varied by reducing the impeller diameter. The effect of impeller reduction has the following relationships, when the performance of a full diameter impeller is known.

$$\begin{array}{ll} Q \propto D \text{ where } Q = \text{throughput} & H \propto D^2 \text{ where } H = \text{head} \\ P \propto D^3 \text{ where } P = \text{absorbed power} & D = \text{impeller} \end{array}$$

$$\begin{array}{ll} \text{therefore } \frac{Q_2}{Q_1} = \frac{D_2}{D_1} & \text{therefore } Q_2 = \frac{Q_1 \times D_2}{D_1} \\ \text{and } \frac{H_2}{H_1} = \left(\frac{D_2}{D_1}\right)^2 & \text{therefore } H_2 = H_1 \left(\frac{D_2}{D_1}\right)^2 \\ \text{and } \frac{P_2}{P_1} = \left(\frac{D_2}{D_1}\right)^3 & \text{therefore } P_2 = P_1 \left(\frac{D_2}{D_1}\right)^3 \end{array}$$

Standard electrical supplies in the UK

110 volt single phase (110/1/50) standard voltage found on construction sites for small tools and portable appliances usually only available up to 32 Amp.

415 volt three phase (415/3/50) standard voltage on site and within industry for the larger equipment that is not portable.

240 volt single phase (240/1/50) standard domestic voltage used for household appliances, retail and light industrial.

Power = kilowatts (kW)

Current = Amps (A)

Voltage = Volts (V)

Single Phase

$$\text{kW} = \frac{\text{Volts} \times \text{Amps} \times \text{Eff \%}}{1000 \times 100}$$

Three Phase

$$\text{kW} = \frac{\text{Volts} \times \text{Amps} \times \text{Eff \%} \times \text{PF} \times 1.73}{1000 \times 100}$$

Volt drop

The amount of voltage lost when using long cable lengths, causes cable to get hot and become unsafe. The motor will also draw excessive current causing overloads to trip and motor to overheat the maximum permissible voltage drop over a length of cable is 2.5%.

To calculate volt drop use table on page 188 or use the following calculation, based on copper cable.

$$\text{Voltage drop} = \frac{\text{Length of cable (m)} \times 0.018 (\text{resist}) \times \text{Amps} \times 1.73}{\text{Cross sectional area of cable (mm}^2\text{)}}$$



The above will give the voltage lost in cable length (v) divide by the supply voltage will give the % drop which must not exceed 2.5%

Example

16 amp 3 phase 415 volt pump using 60 metres of 2.5 mm cable

$$\frac{60 \times 0.018 \times 16 \times 1.73}{2.5 \text{ mm}^2} = 11.96$$

11.96 volt / 415 volt = 2.8% Therefore a larger cable is required as the volt drop exceeds 2.5%

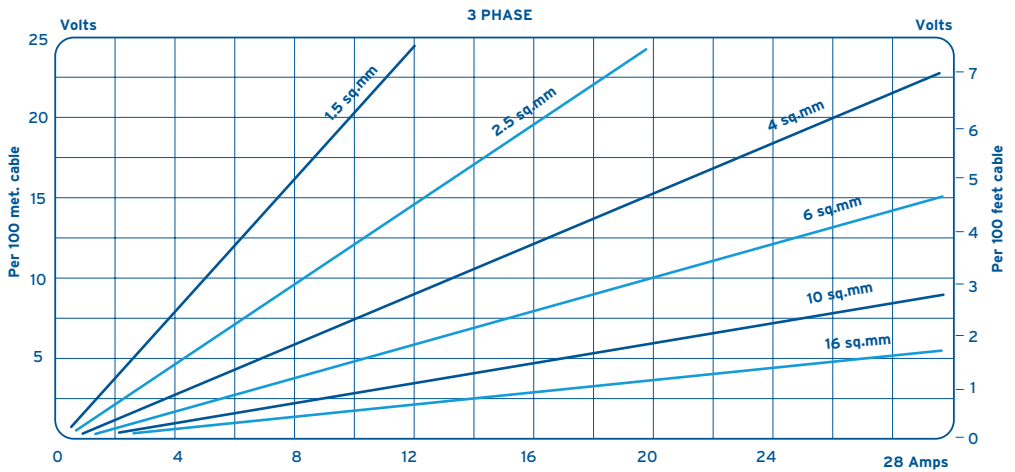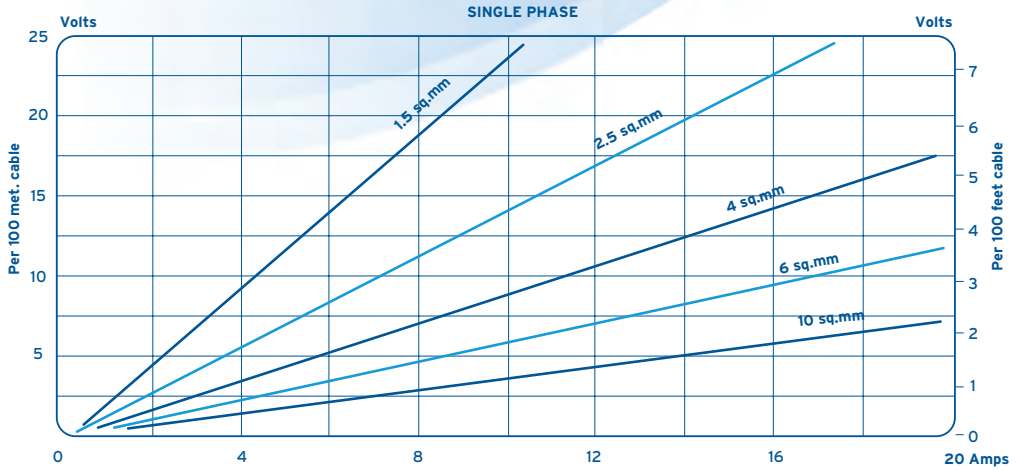


CONVERSION FACTORS

Inches	x	25.4	=	mm	x	0.0394	=	Inches
Feet	x	0.3048	=	m	x	3.281	=	Feet
Yards	x	0.9144	=	m	x	1.0936	=	Yards
Miles	x	1.609	=	km	x	0.6214	=	Miles
Ft²	x	0.0929	=	m ²	x	10.764	=	Ft ²
Miles²	x	2.59	=	km ²	x	0.3861	=	Miles ²
In³	x	16387	=	mm ³	x	0.000061	=	In ³
Ft³	x	0.02832	=	m ³	x	35.31	=	Ft ³
Gals (Imp)	x	4.546	=	L	x	0.22	=	Gals (Imp)
		0.004546	=	m ³		220	=	
Gals (US)	x	3.785	=	L	x	0.2642	=	Gals (US)

LBS	x	0.4536	=	kg	x	2.2046	=	LBS
Tons		1016		kg		0.000984		Tons
Gal/min (Imp)	x	0.2727	=	m ³ /h	x	3.667	=	Gal/min (Imp)
		0.0757	=	L/ sec		13.21	=	
L/sec	x	3.6	=	m ³ /h	x	0.277	=	L/sec
Gal/min (Imp)	x	1.2	=	USGPM	x	0.833	=	Gal/min (Imp)
PSI	x	0.06895	=	Bar	x	14.504	=	PSI
		0.703 S.G	=	M Liquid		1.422 x S.G	=	
Ft. Liquid	x	0.02989xS.G	=	Bar	x	33.456 S.G	=	Ft. Liquid
STD.ATM	x	1.01225	=	Bar	x	0.9879	=	STD.ATM
HP	x	0.7457	=	Kw	x	1.341	=	HP

Self Priming Pump

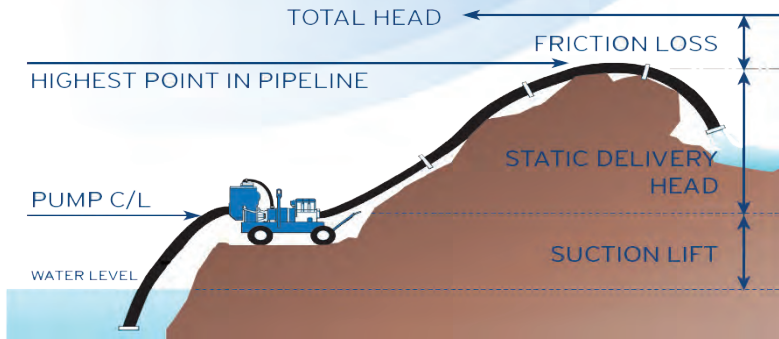


Total Head


Total head is the sum of the static head from the water level to the highest point in the pipeline, plus the losses in the pipework, valves etc.

Head can be affected by the specific gravity and the viscosity of the pumped liquid. It would be normal to add 10% to the total head for sewage applications.

Submersible Pump

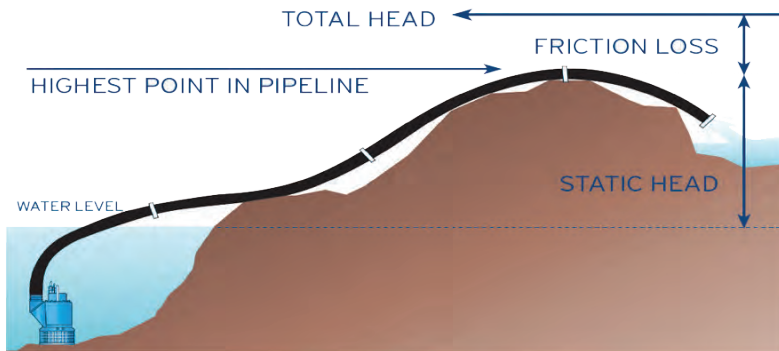

PACKAGED PUMPING SYSTEM

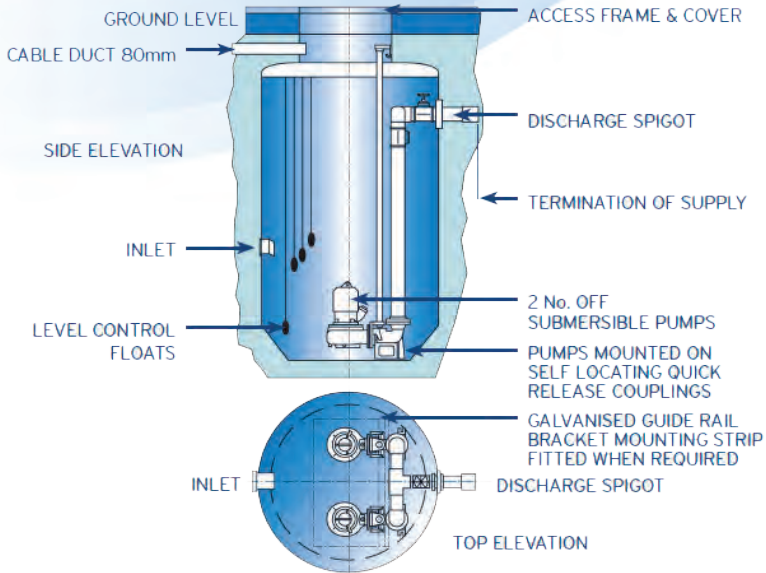

Installations

Sykes Pumps offer a full mechanical and electrical installation service for pumps, pipework, control panels, kiosks, level controls and telemetry equipment.

Anything from a very basic single pump system to full sewers for adoption type pumping stations.

The most popular system for simple sewage and drainage clearance is the GRP packaged pumping station, pictured here, available in various sizes.

The tank is delivered direct to site for the civils contractor to install. When ready, our engineer visits site to install the pumps and controls and commission the system.

Sykes Pumps also offer a planned maintenance package to suit all requirements.

SYKES PUMPS 

sykes-pumps.com

or call us Free on **0800 211 611**

INFORMATION

PACKAGED PUMPING
SYSTEM

242

SYKES PUMPS REPAIR & SERVICE

As you would expect we offer an unrivalled back up service from a nationwide depot network. These backed up by 2 regional repair centres, staffed by a dedicated team led by our Regional Workshop Managers. These managers have many years' experience in running our service and repair centres looking after one of the largest Pump hire fleets in the country, giving them the ability and their teams to offer some of the best technical advice for service and maintenance in the industry, giving us the ability to offer cost-effective, timely estimates and turnarounds, whilst maintaining the quality you have come to demand from the one of the UK's leading Pump Suppliers for Hire, Sales and Service.



SYKES PUMPS GENUINE PARTS

Sykes pump parts are available from a nationwide network of depots, these backed up by 3 regional spares stocking and distribution centres, staffed by a dedicated team led by our Regional Workshop Managers. These managers have experience running our service and repair centres, giving them the ability and their teams to offer some of the best technical advice for parts and service in the industry.

We supply only genuine Sykes Manufactured Parts for all spares requirements on Sykes Pump units along with genuine parts from third party manufacturers whether that is for Engines, electric motors or specific units supplied by Sykes Pumps.



SYKES PUMPS 

sykes-pumps.com

or call us Free on **0800 211 611**

INFORMATION

CONVERSION
FACTORS

244

This image shows a blank sheet of white paper with horizontal blue lines, resembling notebook paper. In the top-left corner, there is a decorative light blue wavy graphic element. The rest of the page is empty, with no text or other markings.This image shows a blank sheet of white paper with horizontal blue ruling lines. The lines are evenly spaced and run across the width of the page. There are no margins, text, or other markings on the paper.

[illegible]This image shows a blank sheet of white paper with horizontal blue ruling lines. The lines are evenly spaced and run across the width of the page. There are no margins, text, or other markings on the paper.

[illegible]This image shows a single sheet of white paper with horizontal blue ruling lines. The lines are evenly spaced and run across the width of the page. There are no margins, text, or other markings on the paper.

GROUP INFORMATION

Andrews Air Conditioning offers the most comprehensive range of short and long-term air conditioning, comfort cooling, and temperature control systems. Andrews Air Conditioning is capable of delivering temporary cooling solutions of a wide range of business sectors and applications including specialist process and people cooling. As well as an extensive range of air conditioners for hire, Andrews Air Conditioning also offers design, sales, installation, nationwide preventative maintenance, aftercare and breakdown services tailored to customer's exact requirements. Partnerships with the brand leaders such as Toshiba, Fujitsu, Mitsubishi and Daikin ensure that the correct solution is provided for all environments.

Andrews is the UK leader in portable heat for hire, delivering safe and cost-effective warmth for any location or application. We deliver compact yet powerful electric, gas and oil heaters and mobile boilers for instant heat and hot water, for long or short term hire. Extensive experience in humidity and condensation control ensures that a specialist environmental drying solution is also available from within this division. Continued investment in research and development will ensure that Andrews Heating & Drying will maintain its stronghold as the UK market leader in specialist heating and drying equipment solutions.

Andrews Sykes are the UK's leading specialists in portable and industrial dehumidifiers for hire, delivering safe & cost effective drying solutions for any location or application. Our range of refrigerant and desiccant dehumidifiers and strategic locations allows us to respond quickly to any emergency situations however large or small. Our industrial units are ideal for many markets including petro-chemical, power industry and construction to name but a few. Our fully trained team are always on hand with expert and friendly advice

When you need serious cooling, Andrews will give you the best products and highest service levels - tried and tested Chillers and Air Handlers for even the toughest applications across all industry sectors. Whether it's planned support or emergency cover after a breakdown, our fully mobile Fluid Chillers and Fast Chill units are ideal for applications that require Air Conditioning, Fluid Cooling and Process Cooling. Our diverse range of equipment is designed to meet all your cooling application requirements from Air Conditioning to cold storage in Pharmaceuticals, Petrochemicals, Manufacturing, Food & Beverages, Facilities Management and Building & Construction.



SYKES PUMPS 

sykes-pumps.com

or call us Free on **0800 211 611**

GROUP INFORMATION

Instant heat and hot water, wherever and whenever they're needed. That's what Andrews Boiler Hire delivers. Whether it's support during scheduled maintenance, refits or new build, our fully mobile boilers are the most advanced and efficient in the business. Available 24/7 365 days a year, Nationwide. These strongly constructed Boilers, deliver amazing reliability. Our oil and gas fired boilers can be coupled to any existing heating and hot water system, quickly and efficiently. All our LPHW (Low Pressure Hot Water) boilers deliver large volumes of hot water on demand: for indoor and outdoor locations, at any time of the year, for a range of commercial, industrial and leisure applications.

Andrews Ventilation has a comprehensive range of general cooling fans, industrial fans and specialist ventilation units. Our industrial fans and cooling fans are ideal for improving air circulation from large warehouse to smaller offices. Our range of specialist ventilation units have many uses and are a must for the removal of gases, fumes and dust or where very large volumes of air are required. Andrews fully trained staff are always on hand to offer our clients technical advice and site surveys as part of our service.

Sykes Pumps International

The Sykes Pumps name stretches far beyond the UK. We have been established in the Middle East for over 40 years. Our Khansaheb Sykes subsidiary is a market leader for Dewatering and Pump hire throughout the Middle East where we operate from Dubai, Sharjah, Abu Dhabi, Oman, Saudi Arabia, Bahrain, Qatar and Kuwait. Since the early days, when we were first involved in the Dubai Creek crossings, right up until recent times, we have been heavily involved in many of the major development projects throughout the GCC.

In Europe, Andrews Sykes continue to grow, since opening our first mainland Europe depot in Holland over 40 years ago, we now have depots throughout France, Belgium, Luxembourg, Switzerland and Italy, with partnerships in both the Republic of Ireland and Northern Ireland.

The Sykes Pumps brand is well known worldwide, in North America we work with distributors, for both sales and hire. Recently we have provided pumping equipment for major projects in Russia, Asia, Africa and South America. No matter your location or whereabouts, Sykes Pumps can offer safe, reliable and efficient pumping solution for many applications.



Andrews Sykes operates across the globe, you can find us in:



SYKES PUMPS 

sykes-pumps.com

or call us Free on **0800 211 611**

Nationwide Depot Network

Aberdeen	London (Charlton)
Ashford	Milton Keynes
Basildon	Norwich
Birmingham	Nottingham
Bovey Tracey	Oldham
Bristol	Penrith
Doncaster	Peterborough
Glasgow	Pontypridd
Grangemouth	Portsmouth
Heathrow	Sedgefield
Inverness	Stoke on Trent
Liverpool	West Sussex

We also have operations in
Europe and the Middle East



Registered office: St David's Court,
Union Street, Wolverhampton, WV1 3JE
Tel: 01902 328 700
Email: info@andrews-sykes.com
Web: andrews-sykes.com

 **ANDREWS
SYKES**
HIRE SALES SERVICE INSTALL
0800 211 611
sykes-pumps.com